


Packaging Diagrams and Parameters

84-Lead Ceramic Leaded (CL) Chip Carrier with Window - Square [CERQUAD]

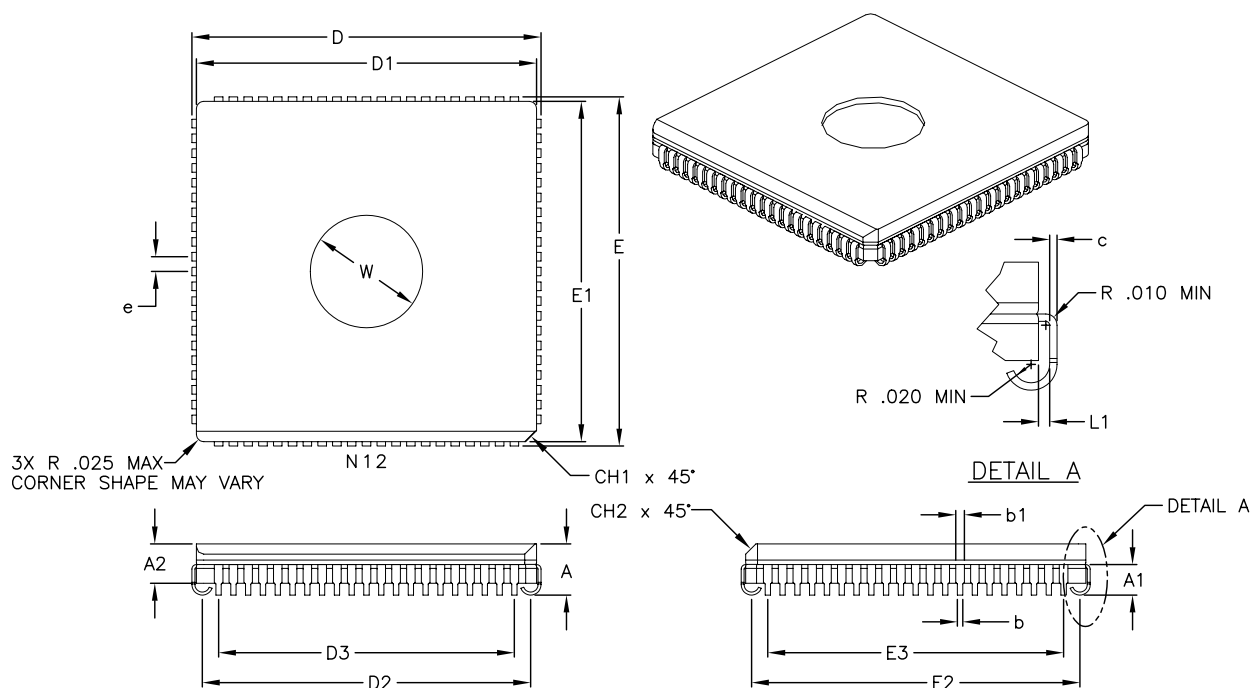


Dimension	Units	INCHES		
		MIN	NOM	MAX
Number of Pins	N	84		
Pitch	e	.050 BSC		
Overall Height	A	.155	.172	.190
Package Thickness	A2	.132 REF		
Lead Height	A1	.090	.100	.120
Side Chamfer	CH2	.035 REF		
Corner Chamfer	CH1	.040 REF		
Overall Package Width	E	1.185	1.190	1.195
Overall Package Length	D	1.185	1.190	1.195
Ceramic Package Width	E1	1.130	1.150	1.165
Ceramic Package Length	D1	1.130	1.150	1.165
Overall Lead Centers	E3	1.00 REF		
Overall Lead Centers	D3	1.00 REF		
Footprint Width	E2	1.080	1.110	1.140
Footprint Length	D2	1.080	1.110	1.140
Lead Length	L1	.006	—	—
Lead Thickness	c	.006	.007	.010
Lower Lead Width	b	.017	.019	.021
Upper Lead Width	b1	.026	.029	.032
Window Diameter	W	.395	.400	.405

Notes:

- Dimensions D1 and E1 do not include glass protrusion. These protrusions shall not exceed .005" per side.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

84-Lead Ceramic Leaded (CL) Chip Carrier with Window - Square [CERQUAD]

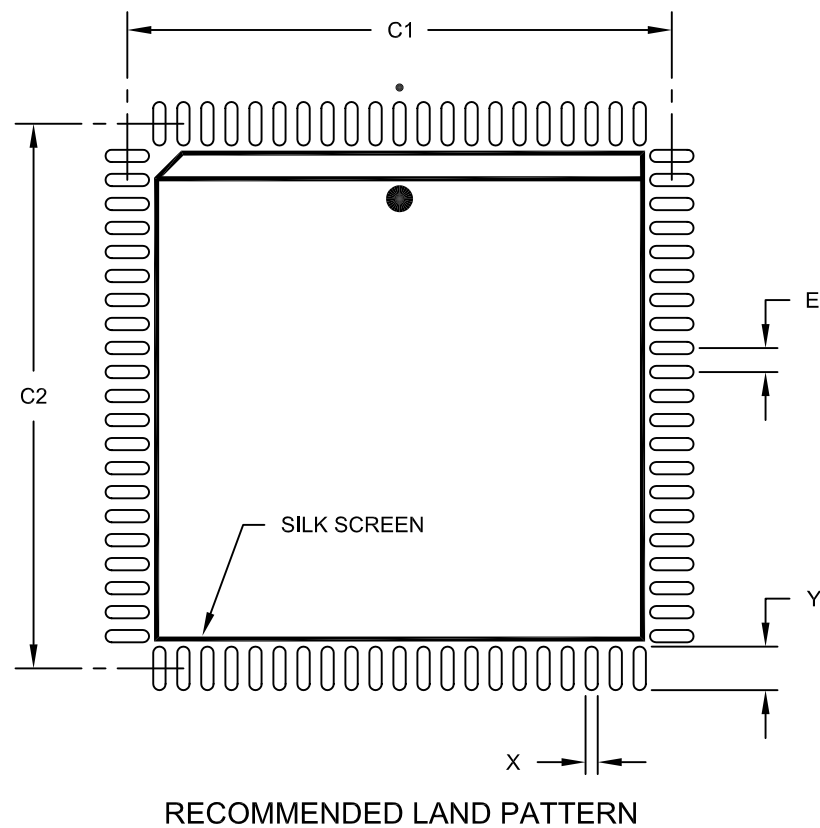

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		.050	
Contact Pad Spacing	C1		1.134	
Contact Pad Spacing	C2		1.134	
Contact Pad Width (X28)	X			.026
Contact Pad Length (X28)	Y			.091

Notes:

- 1. Dimensioning and tolerancing per ASME Y14.5M
- BSC: Basic Dimension. Theoretically exact value shown without tolerances.