
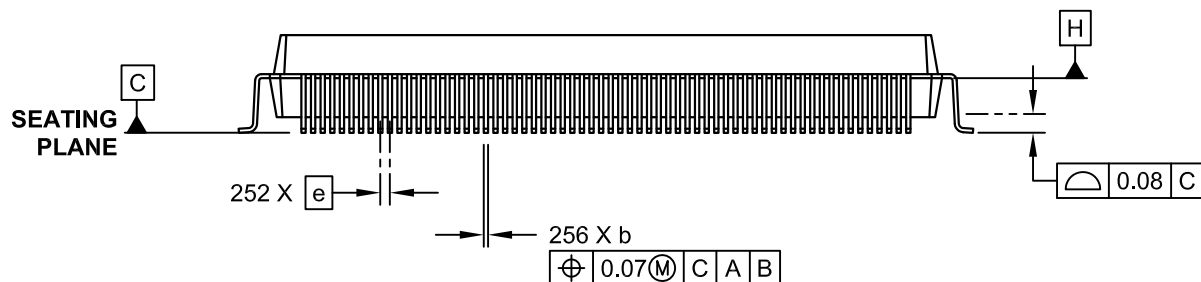


256-Lead Plastic Metric Quat Flatpack (PQ) - 28x28x3.40 mm Body [MQFP]
2.60 mm Footprint


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

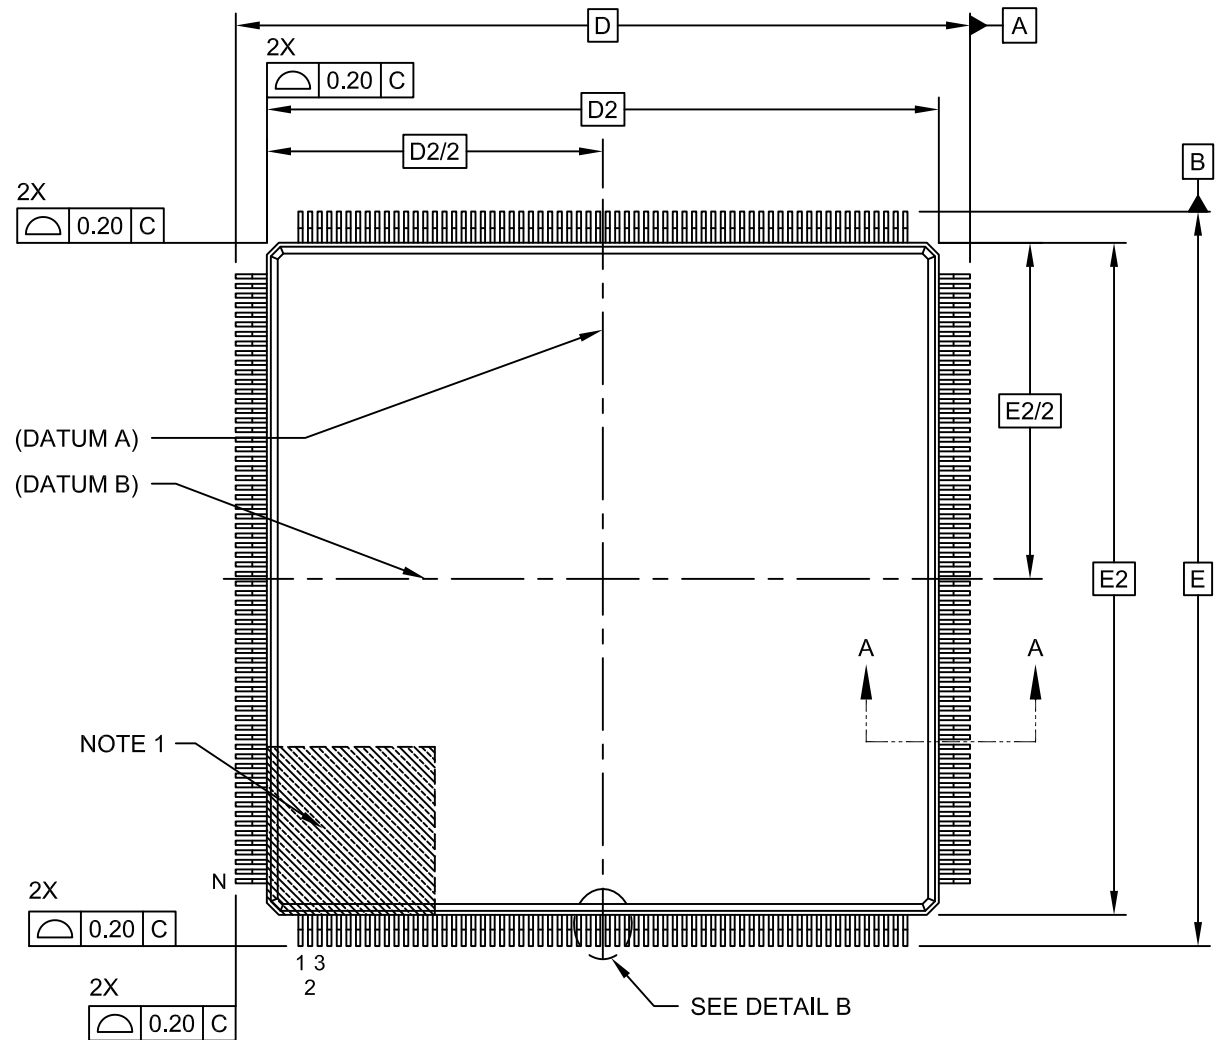

256-Lead Plastic Metric Quat Flatpack (PQ) - 28x28x3.40 mm Body [MQFP]

2.60 mm Footprint

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

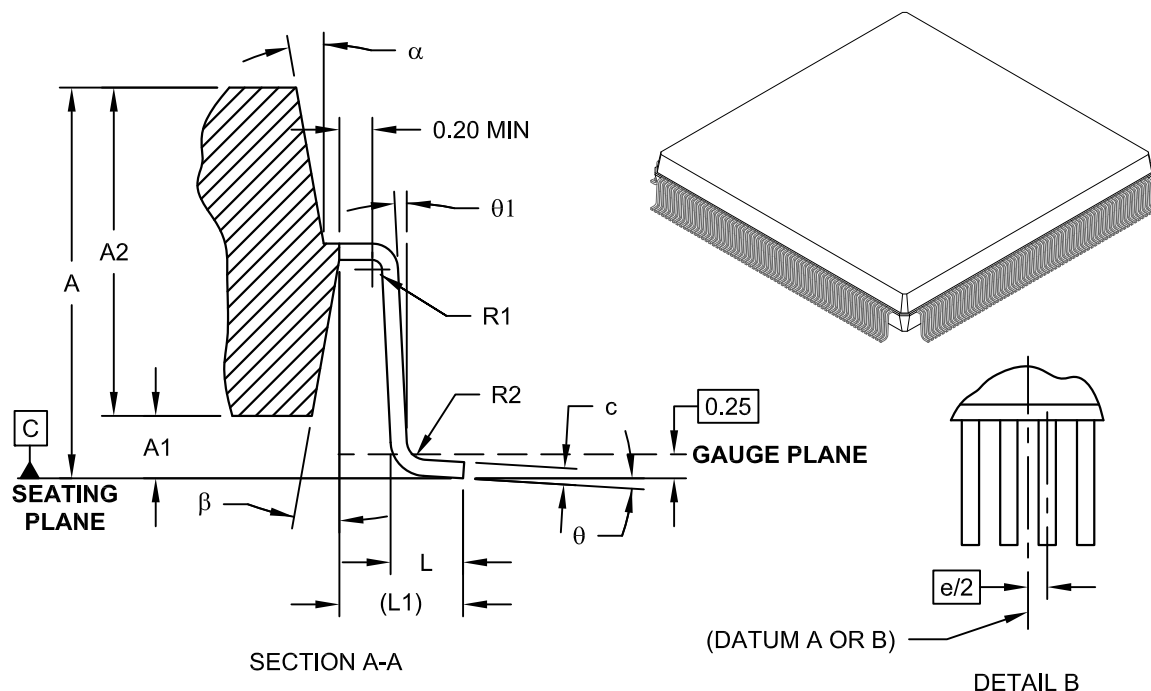

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Leads	N		256		
Lead Pitch	e		0.40 BSC		
Overall Height	A		-	-	4.07
Molded Package Height	A2		3.20	3.40	3.60
Standoff	A1		0.15	0.25	0.35
Foot Length	L		0.45	0.60	0.75
Footprint	L1		1.30 (REF)		
Lead Angle	ϕ		0°	3.5°	7°
Foot Angle	$\phi 1$		0°	-	-
Overall Width	E		30.60 BSC		
Overall Length	D		30.60 BSC		
Molded Body Width	E1		28.00 BSC		
Molded Body Length	D1		28.00 BSC		
Lead Thickness	c		0.09	-	0.20
Lead Width	b		0.13	-	0.23
Bend Radius	R1		0.08	-	-
Bend Radius	R2		0.25 TYP		
Mold Draft Angle Top	α		9°	-	11°
Mold Draft Angle Bottom	β		9°	-	11°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M.
 BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 REF: Reference Dimension, usually without tolerance, for information purposes only.