



Packaging Diagrams and Parameters



6-Lead Plastic Dual Flat, No Lead Package (ME) - 2x3x0.9mm Body [DFN]

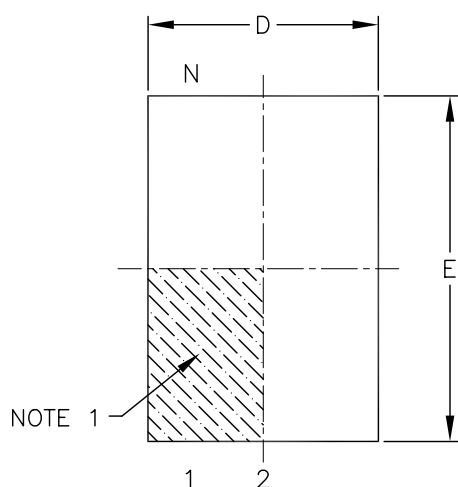

TOP VIEW

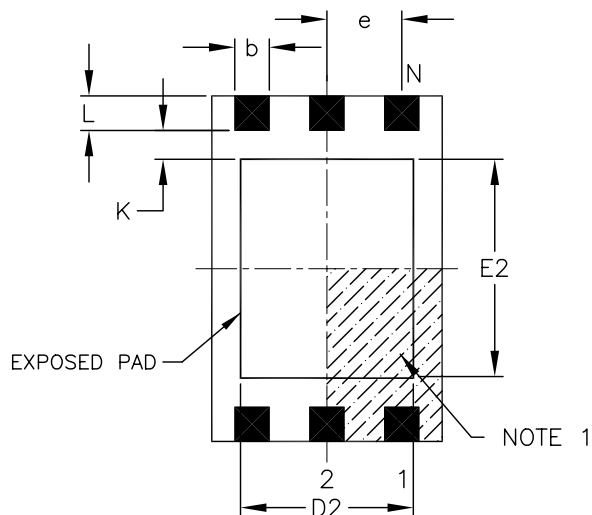

BOTTOM VIEW

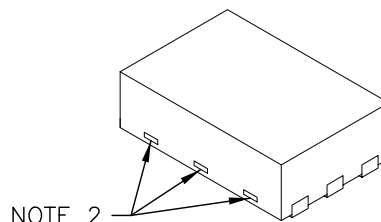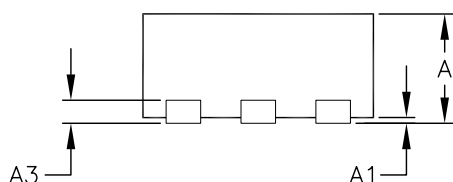

Dimension	Units	MILLIMETERS		
		MIN	NOM	MAX
Number of Pins	N	6		
Pitch	e	0.65 BSC		
Overall Height	A	0.80	0.90	1.00
Standoff	A1	0.00	0.02	0.05
Contact Thickness	A3	0.20 REF		
Overall Length	D	2.00 BSC		
Overall Width	E	3.00 BSC		
Exposed Pad Length	D2	1.40	—	1.60
Exposed Pad Width	E2	1.80	—	2.00
Contact Width	b	0.25	0.30	0.35
Contact Length	L	0.20	0.30	0.40
Contact-to-Exposed Pad	K	0.20	—	—

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package may have one or more exposed tie bars at ends.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.