



## Packaging Diagrams and Parameters



### 6-Lead Plastic Dual Flat, No Lead Package (MH) - 3x3x0.9mm Body [DFN]

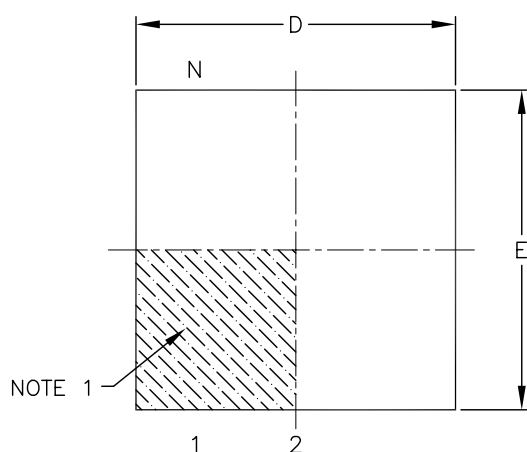

TOP VIEW

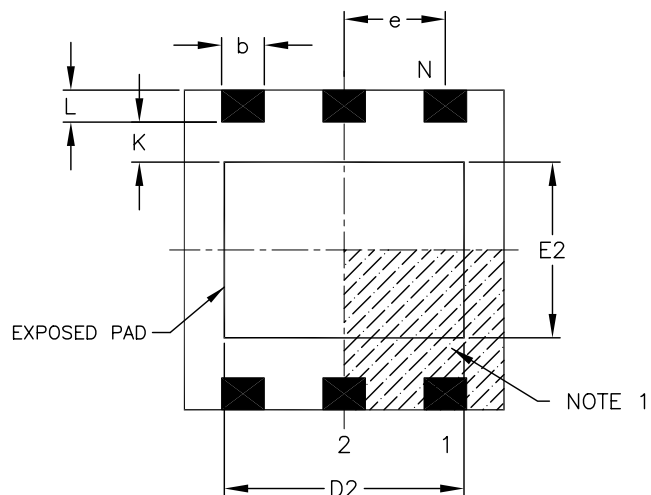

BOTTOM VIEW

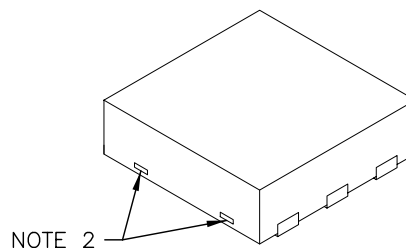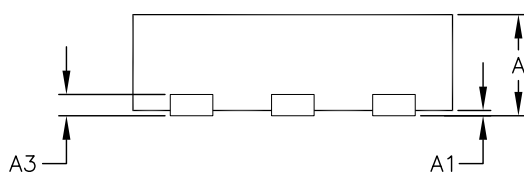

| Dimension              | Units | MILLIMETERS |      |      |
|------------------------|-------|-------------|------|------|
|                        |       | MIN         | NOM  | MAX  |
| Number of Pins         | N     | 6           |      |      |
| Pitch                  | e     | 0.95 BSC    |      |      |
| Overall Height         | A     | 0.80        | 0.90 | 1.00 |
| Standoff               | A1    | 0.00        | 0.02 | 0.05 |
| Contact Thickness      | A3    | 0.20 REF    |      |      |
| Overall Length         | D     | 3.00 BSC    |      |      |
| Overall Width          | E     | 3.00 BSC    |      |      |
| Exposed Pad Length     | D2    | 0.00        | —    | 2.25 |
| Exposed Pad Width      | E2    | 0.00        | —    | 1.65 |
| Contact Width          | b     | 0.30        | 0.40 | 0.45 |
| Contact Length         | L     | 0.20        | 0.30 | 0.45 |
| Contact-to-Exposed Pad | K     | 0.20        | —    | —    |

#### Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package may have one or more exposed tie bars at ends.
3. Package is saw singulated
4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.