



20-Terminal Very, Very Thin Leadless Array Package (TW) – 3x3x0.7 mm Body With Exposed Pad [WTLA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

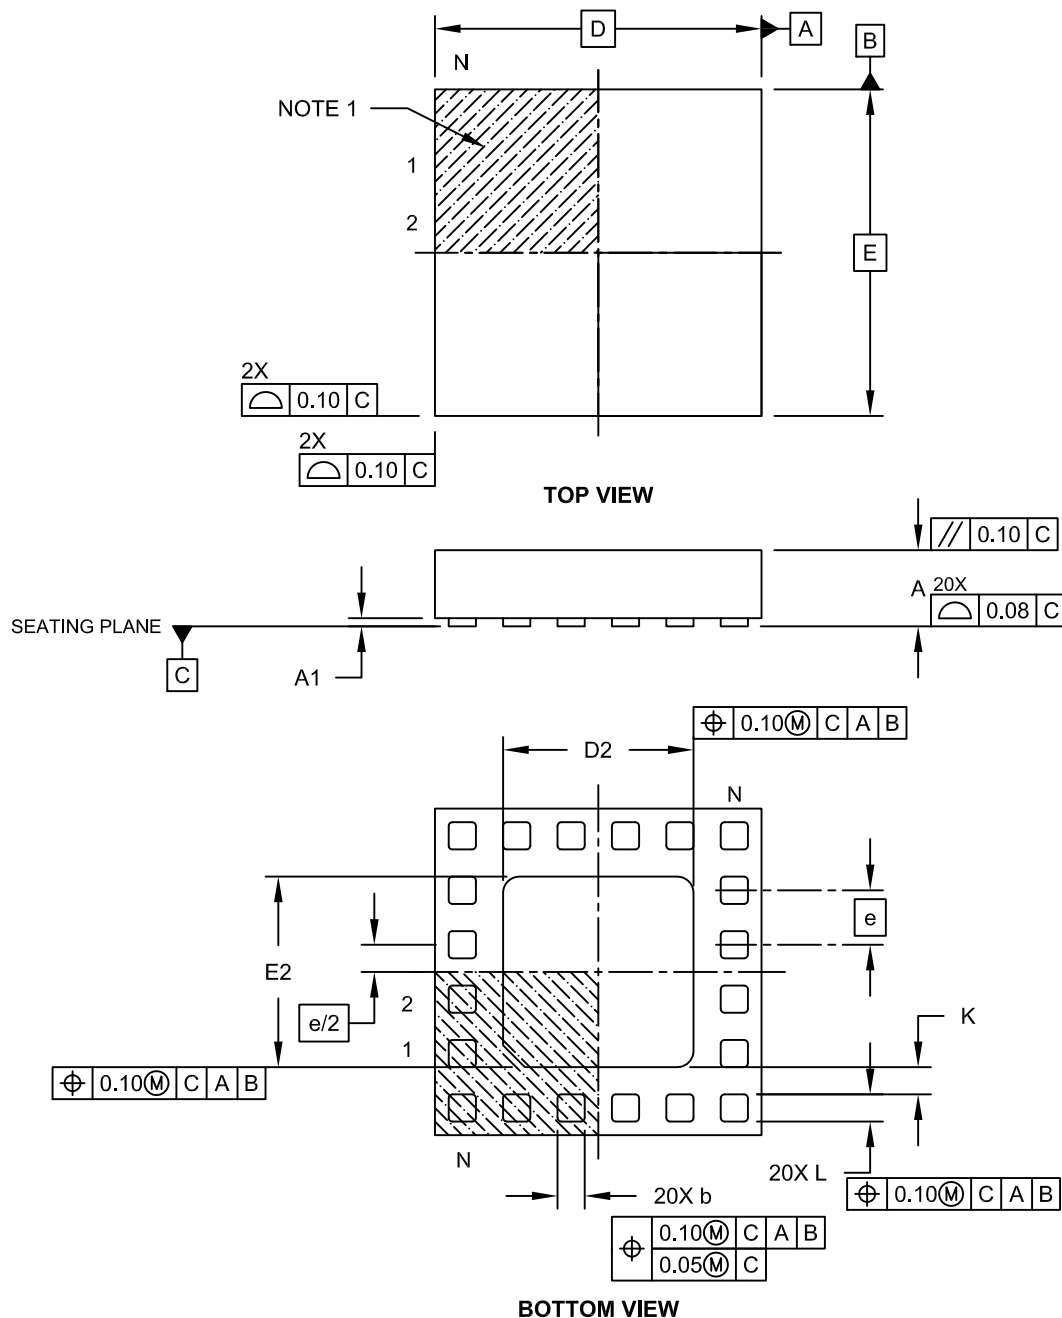

20-Terminal Very, Very Thin Leadless Array Package (TW) – 3x3x0.7 mm Body With Exposed Pad [WTLA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

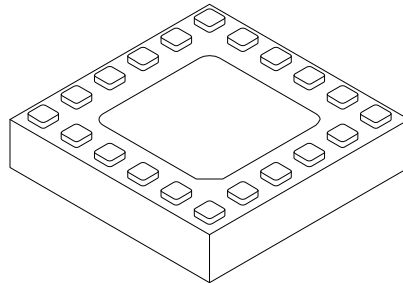

Dimension	Units	MILLIMETERS		
	Limits	MIN	NOM	MAX
Number of Pins	N	20		
Pitch	e	0.50 BSC		
Overall Height	A	0.60	-	0.70
Standoff	A1	0.025	-	0.075
Overall Width	E	3.00 BSC		
Exposed Pad Width	E2	1.60	1.75	1.90
Overall Length	D	3.00 BSC		
Exposed Pad Length	D2	1.60	1.75	1.90
Contact Width	b	0.20	0.25	0.30
Contact Length	L	0.20	0.25	0.30
Contact-to-Exposed Pad	K	0.20	-	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated.
- Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.