



8-Lead Extremely Thin Small Outline No-Leads (NF) – 2x2x0.45 mm Body [XSON]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

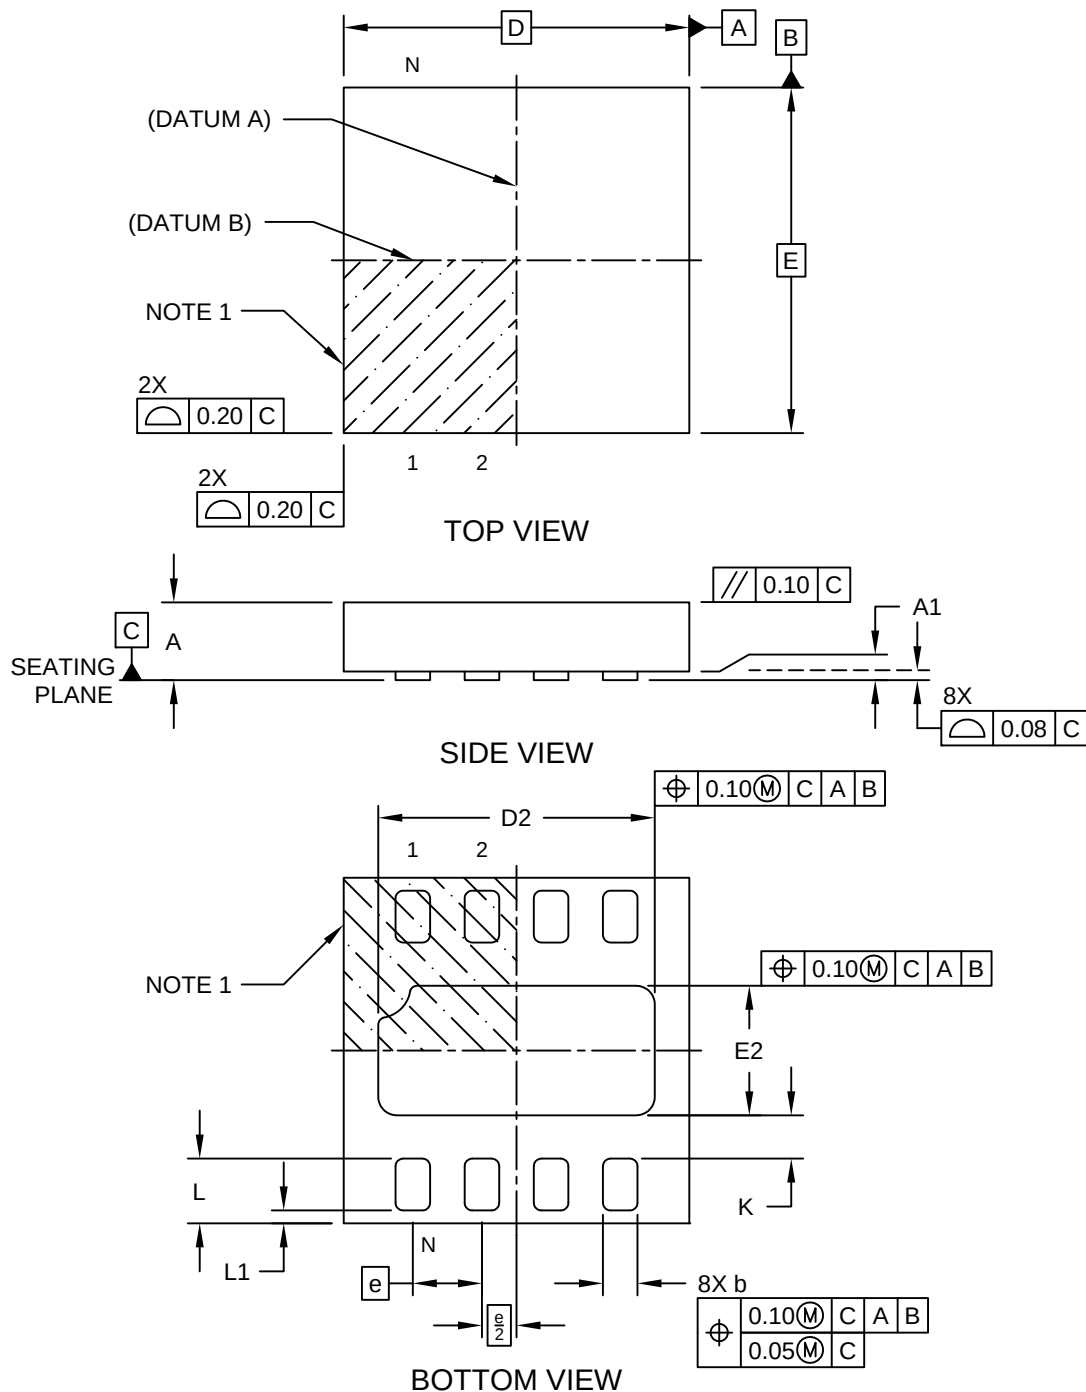

8-Lead Extremely Thin Small Outline No-Leads (NF) – 2x2x0.45 mm Body [XSON]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

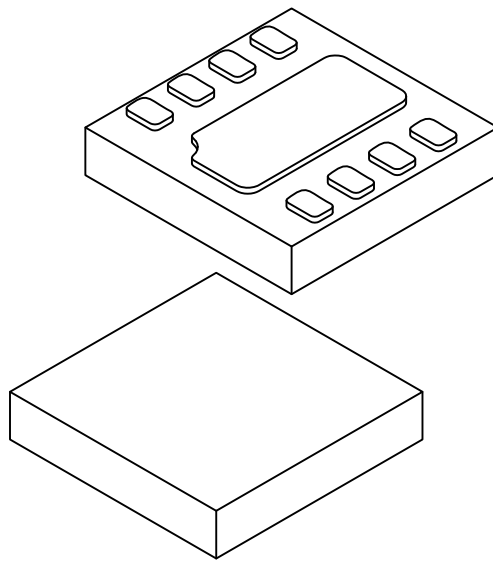


Dimension	Units	MILLIMETERS		
	Limits	MIN	NOM	MAX
Number of Pins	N	8		
Pitch	e	0.40 BSC		
Overall Height	A	0.40	0.45	0.50
Standoff	A1	—	—	0.05
Terminal Length	L	0.325	0.375	0.425
Pull Back	L1	—	—	0.075
Overall Length	D	2.00 BSC		
Overall Width	E	2.00 BSC		
Exposed Pad Length	D2	1.55	1.60	1.65
Exposed Pad Width	E2	0.70	0.75	0.80
Terminal Width	b	0.15	0.20	0.25
Terminal to Exposed Pad	K	0.20	—	—

Notes:

- Terminal 1 visual index feature may vary, but must be located within the hatched area.
- Exact shape at each corner may vary.
- Dimensioning and tolerancing per ASME Y14.5M.
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.


8-Lead Extremely Thin Small Outline No-Leads (QX8E) – 2x2x0.45 mm Body [XSON]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

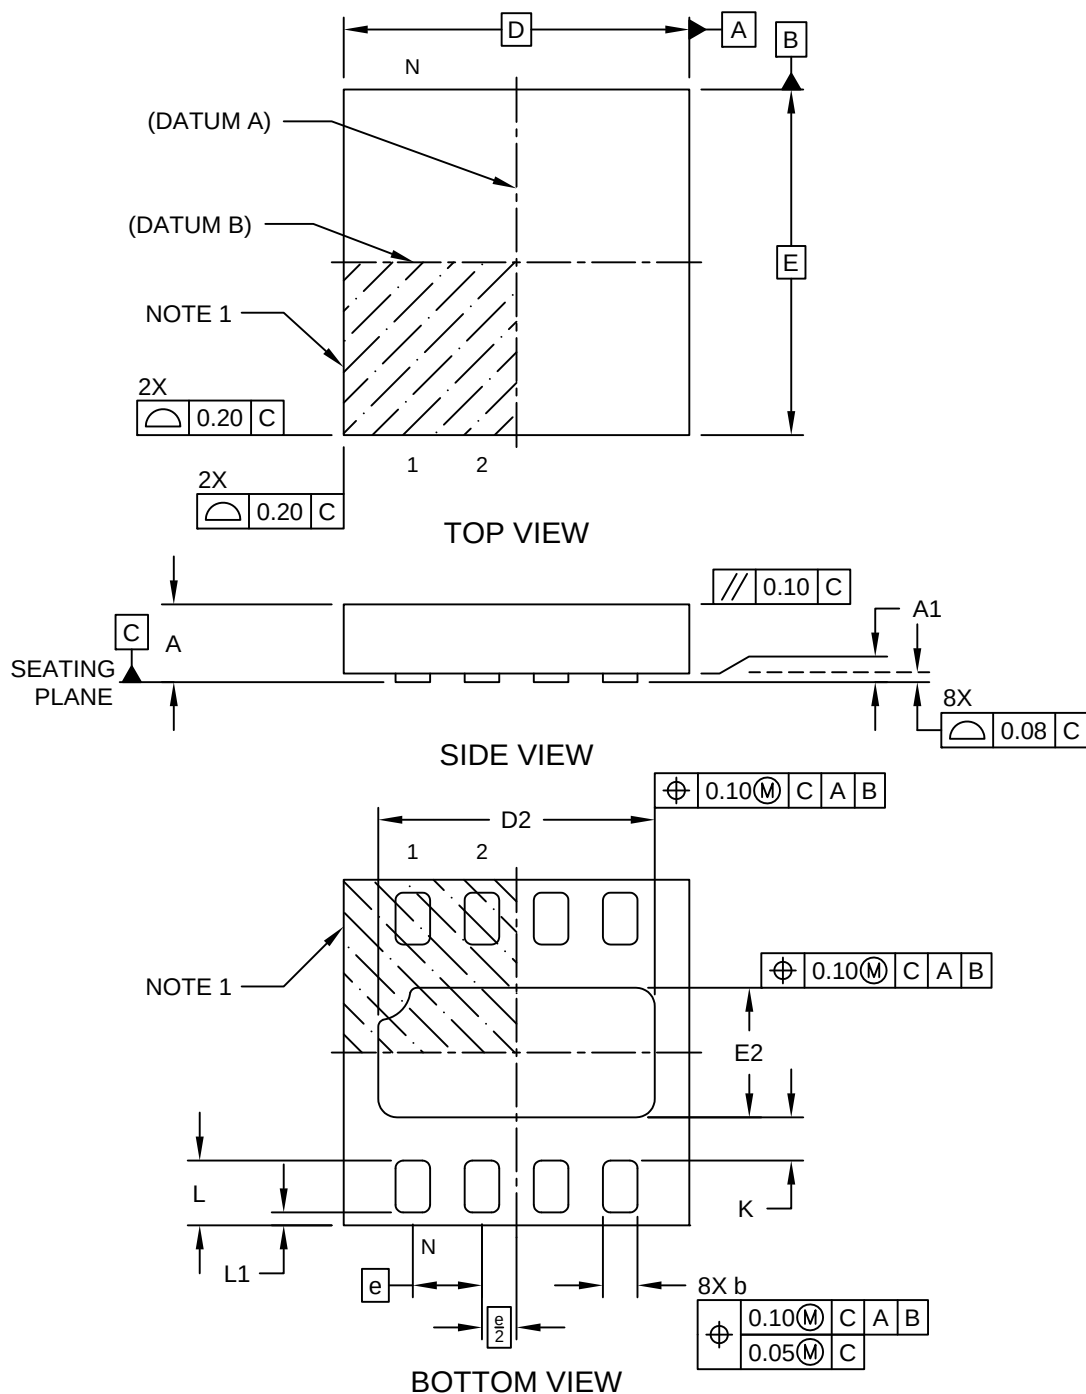

8-Lead Extremely Thin Small Outline No-Leads (QX8E) – 2x2x0.45 mm Body [XSON]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packageing>

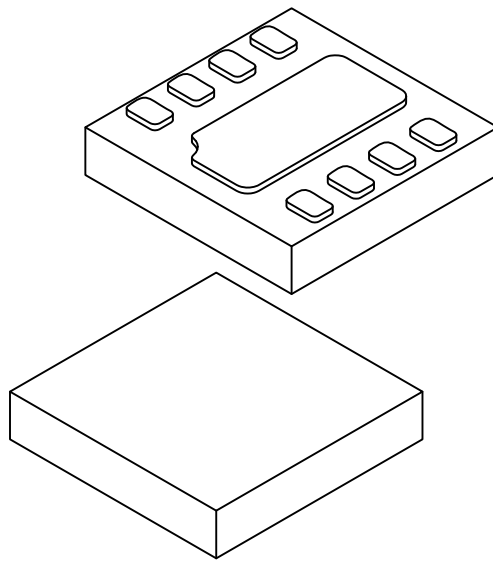

Dimension	Units	MILLIMETERS		
	Limits	MIN	NOM	MAX
Number of Pins	N	8		
Pitch	e	0.40 BSC		
Overall Height	A	0.40	0.45	0.50
Standoff	A1	—	—	0.05
Terminal Length	L	0.325	0.375	0.425
Pull Back	L1	—	—	0.075
Overall Length	D	2.00 BSC		
Overall Width	E	2.00 BSC		
Exposed Pad Length	D2	1.55	1.60	1.65
Exposed Pad Width	E2	0.70	0.75	0.80
Terminal Width	b	0.15	0.20	0.25
Terminal to Exposed Pad	K	0.20	—	—

Notes:

1. Terminal 1 visual index feature may vary, but must be located within the hatched area.
2. Exact shape at each corner may vary.
3. Dimensioning and tolerancing per ASME Y14.5M.
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.