


Packaging Diagrams and Parameters

8-Lead Plastic Very, Very Thin Small Outline No-Lead (MF) - 6x5x0.8 mm Body [WSON] (Also Called WDFN)


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

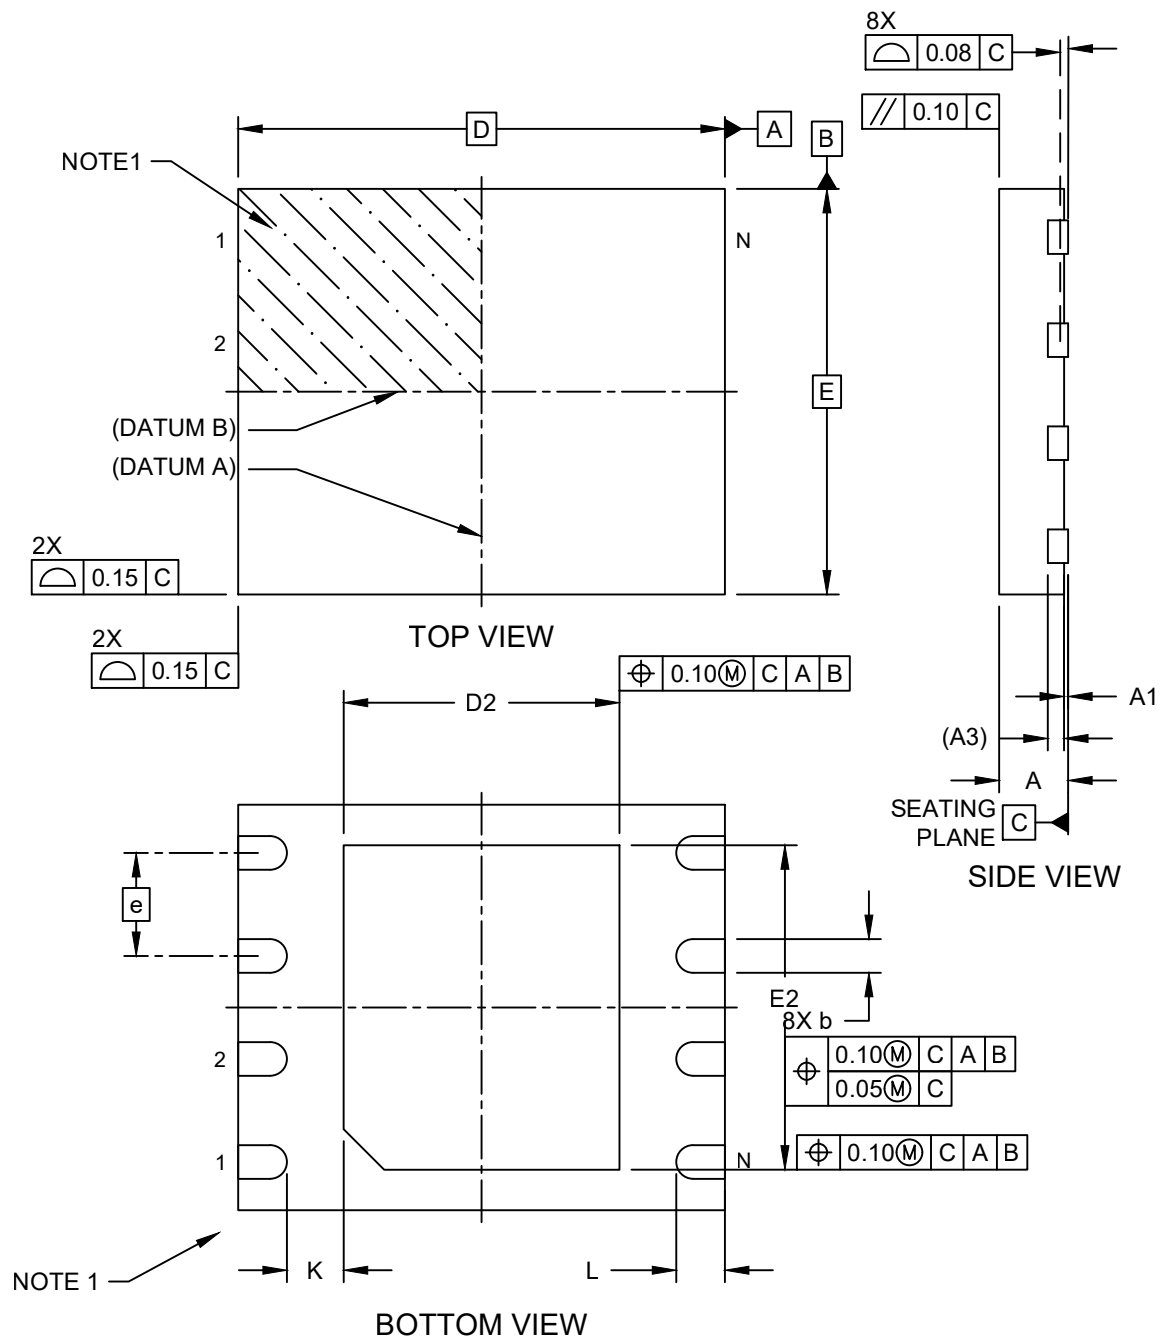

Packaging Diagrams and Parameters

8-Lead Plastic Very, Very Thin Small Outline No-Lead (MF) - 6x5x0.8 mm Body [WSON] (Also Called WDFN)

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

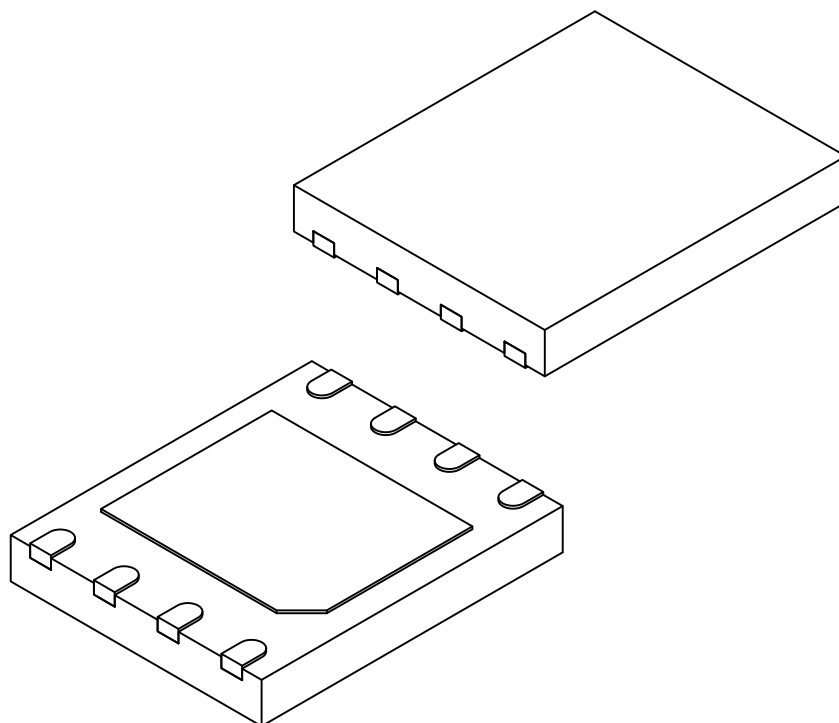

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	8		
Pitch	e	1.27 BSC		
Overall Height	A	0.70	0.75	0.80
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.20 REF		
Overall Width	D	6.00 BSC		
Exposed Pad Width	D2	3.40 BSC		
Overall Length	E	5.00 BSC		
Exposed Pad Length	E2	4.00 BSC		
Terminal Width	b	0.35	0.42	0.48
Terminal Length	L	0.50	0.60	0.70
Terminal-to-Exposed-Pad	K	0.20	-	-


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
REF: Reference Dimension, usually without tolerances, is for information purposes only.

Land Pattern

8-Lead Plastic Very, Very Thin Small Outline No-Lead (MF) - 6x5x0.8 mm Body [WSON] (Also Called WDFN)

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

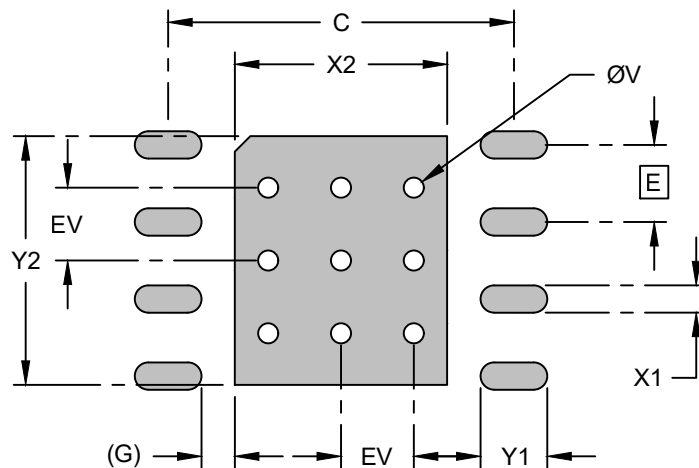

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.27 BSC		
Optional Center Pad Width	X2			3.50
Optional Center Pad Length	Y2			4.10
Contact Pad Spacing	C		5.70	
Contact Pad Width (X20)	X1			0.45
Contact Pad Length (X20)	Y1			1.10
Contact Pad to Center Pad (X20)	(G)	0.55 (REF)		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
- For best soldering results, please refer to the current industry standard IPC-7093.