



16-Lead Plastic Ultra Thin Quad Flat, No Lead Package (MV) - 2.5x2.5x0.6mm Body [UQFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

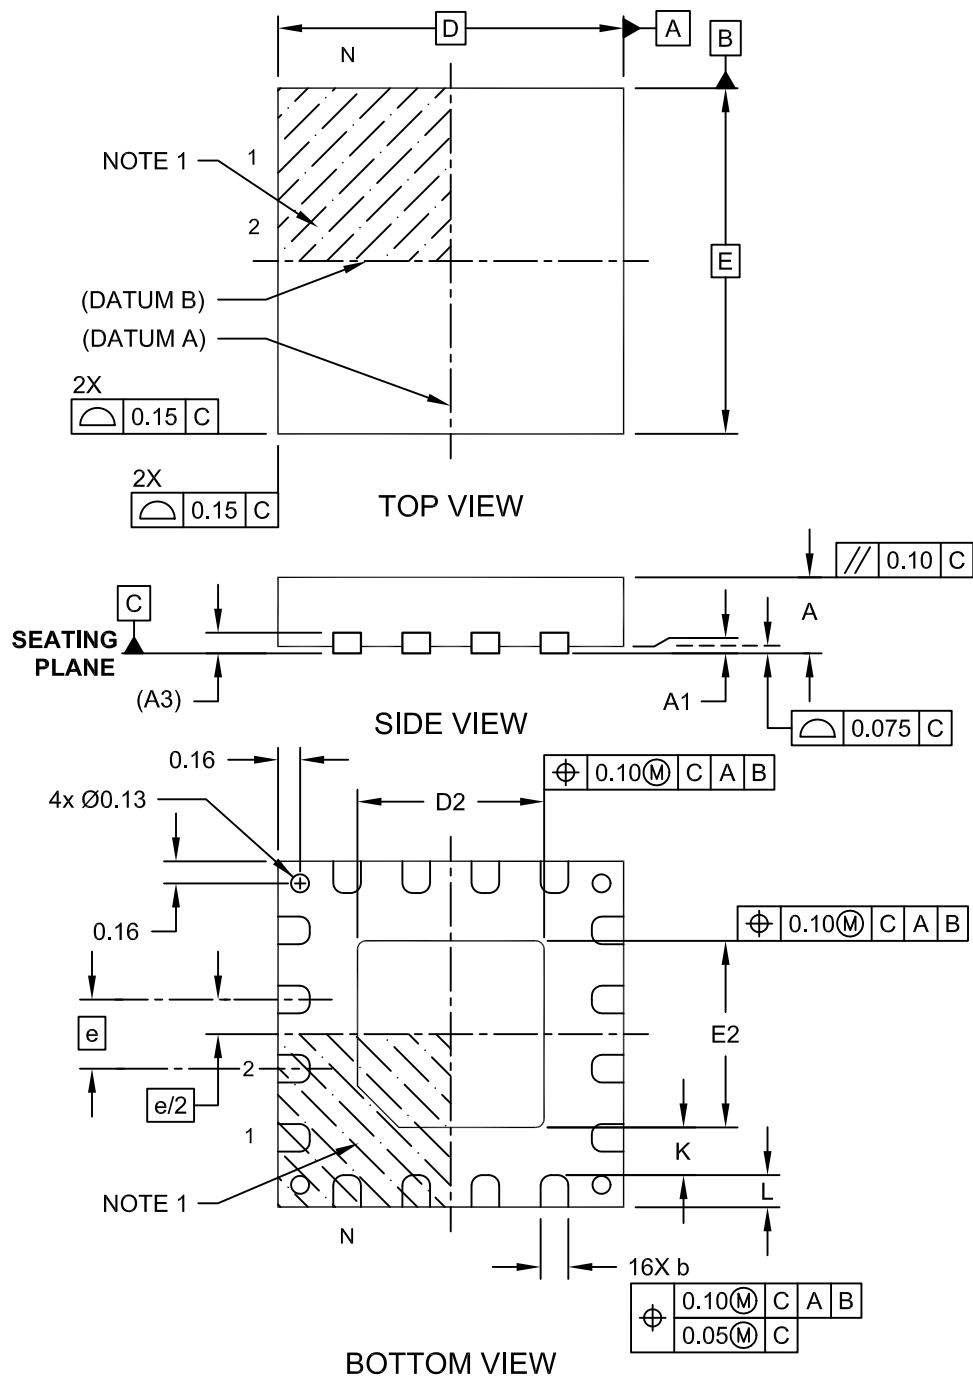

16-Lead Plastic Ultra Thin Quad Flat, No Lead Package (MV) - 2.5x2.5x0.6mm Body [UQFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

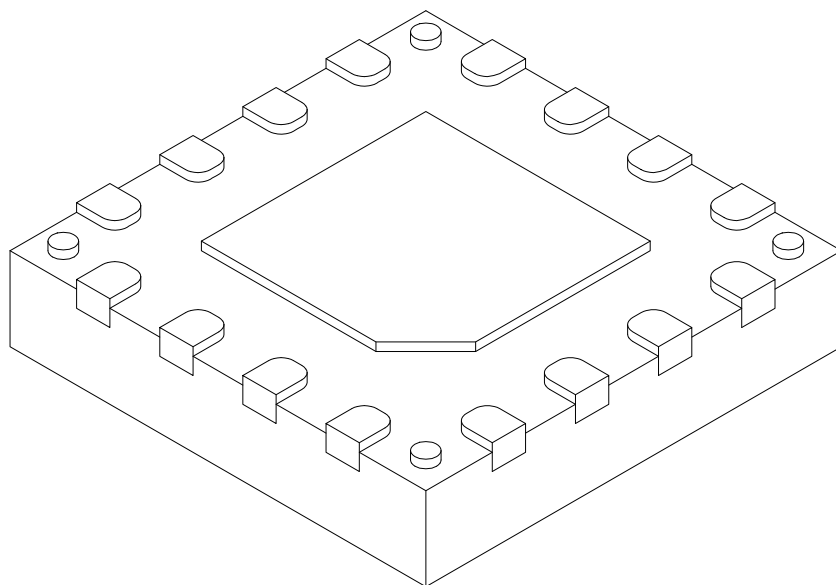

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		16		
Pitch	e		0.50 BSC		
Overall Height	A		0.50	0.55	0.60
Standoff	A1		0.00	0.02	0.05
Terminal Thickness	A3		0.15 REF		
Overall Width	E		2.50 BSC		
Exposed Pad Width	E2		1.30	1.35	1.40
Overall Length	D		2.50 BSC		
Exposed Pad Length	D2		1.30	1.35	1.40
Terminal Width	b		0.15	0.20	0.25
Terminal Length	L		0.175	0.225	0.275
Terminal-to-Exposed-Pad	K		0.20	-	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.