


Packaging Diagrams and Parameters

44-Lead Plastic Quad Flatpack (MW) - 10x10x1.0 mm Body [TQFP] With 4.5x4.5 mm Exposed Pad, Punch Singulated


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

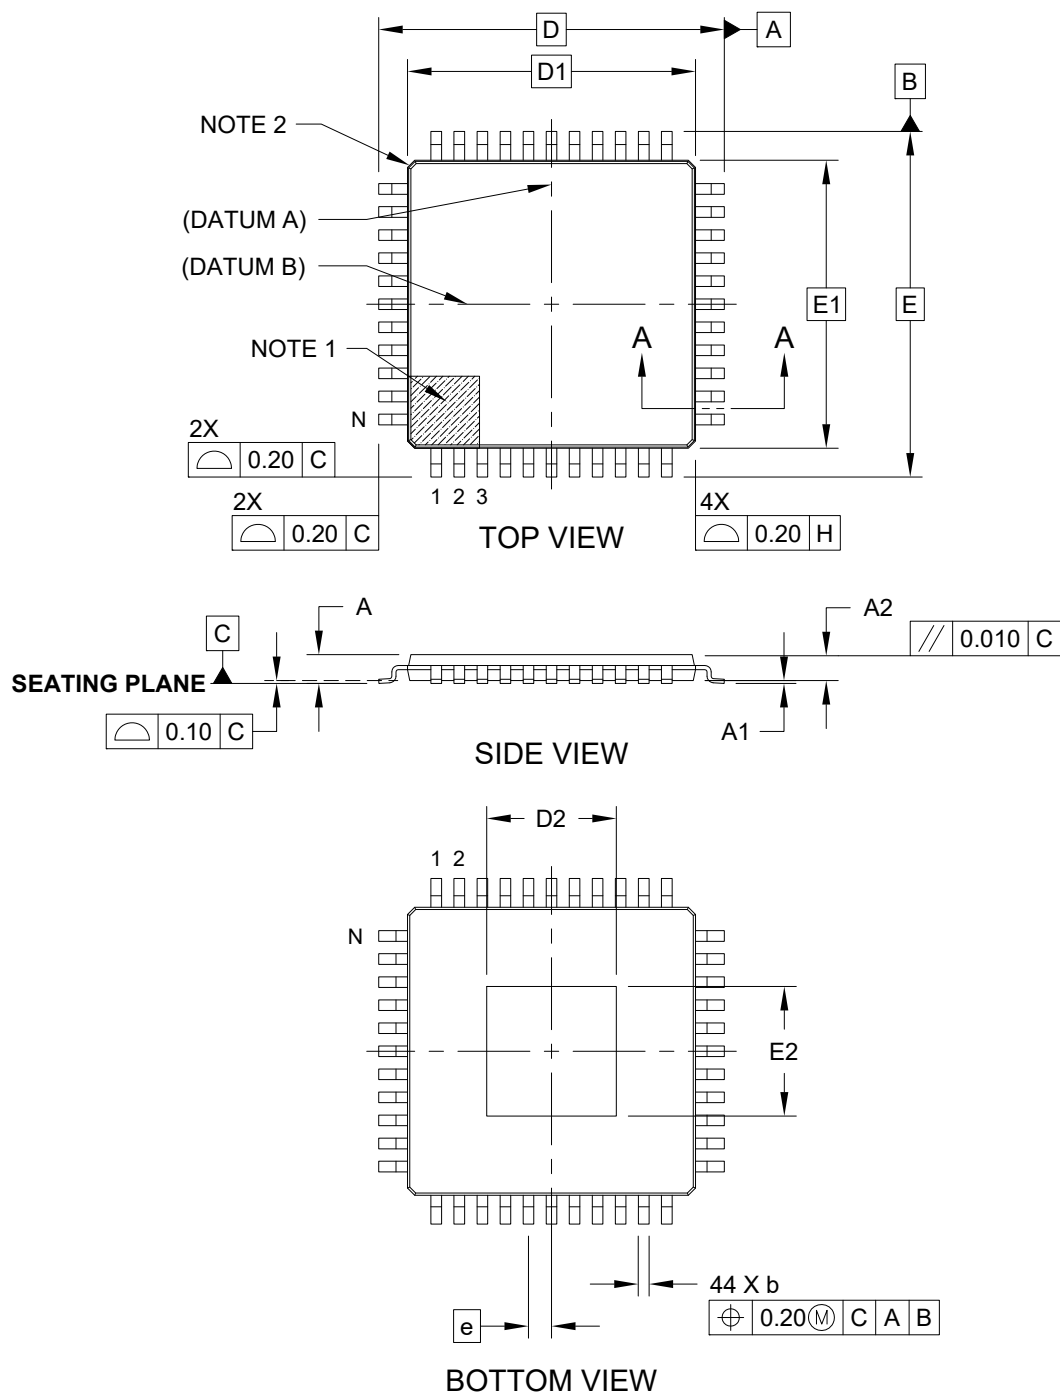

Packaging Diagrams and Parameters

44-Lead Plastic Quad Flatpack (MW) - 10x10x1.0 mm Body [TQFP] With 4.5x4.5 mm Exposed Pad, Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

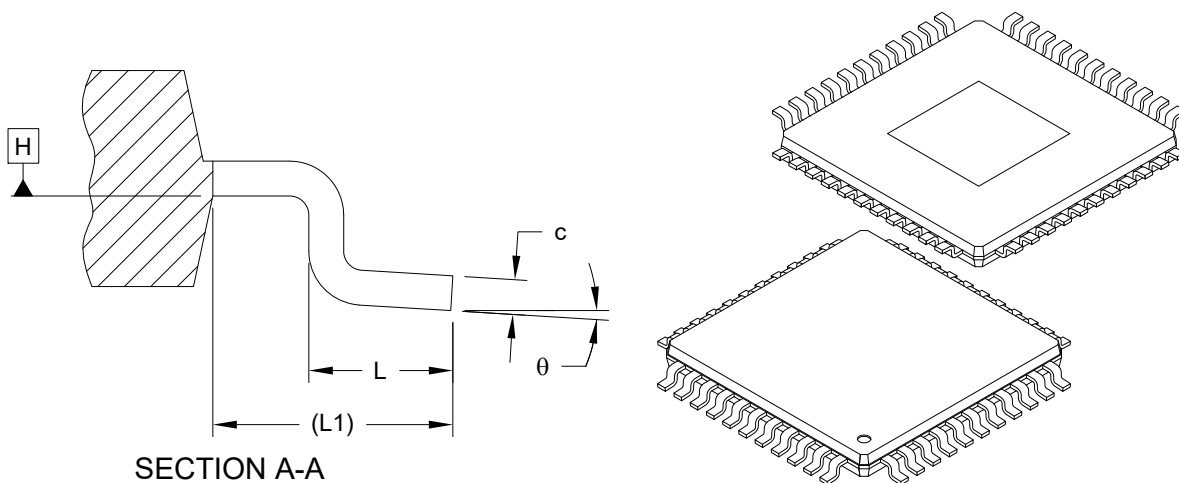

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Leads	N		44		
Pitch	e		0.80 BSC		
Overall Height	A	-	-	-	1.20
Standoff	A1	0.05	-	-	0.15
Molded Package Thickness	A2	0.95	1.00	1.05	
Overall Width	E		12.00 BSC		
Molded Package Width	E1		10.00 BSC		
Exposed Pad Width	E2	4.40	4.50	4.60	
Overall Length	D		12.00 BSC		
Molded Package Length	D1		10.00 BSC		
Exposed Pad Length	D2	4.40	4.50	4.60	
Lead Width	b	0.30	0.37	0.45	
Lead Thickness	c	0.09	-	0.20	
Lead Length	L	0.45	0.60	0.75	
Footprint	L1		1.00 REF		
Foot Angle	θ	0°	3.5°	7°	


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Exact shape of each corner is optional.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

Packaging Diagrams and Parameters

44-Lead Plastic Quad Flatpack (PT) - 10x10x1.0 mm Body [TQFP] With 4.5x4.5 mm Exposed Pad, Punch Singulated


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

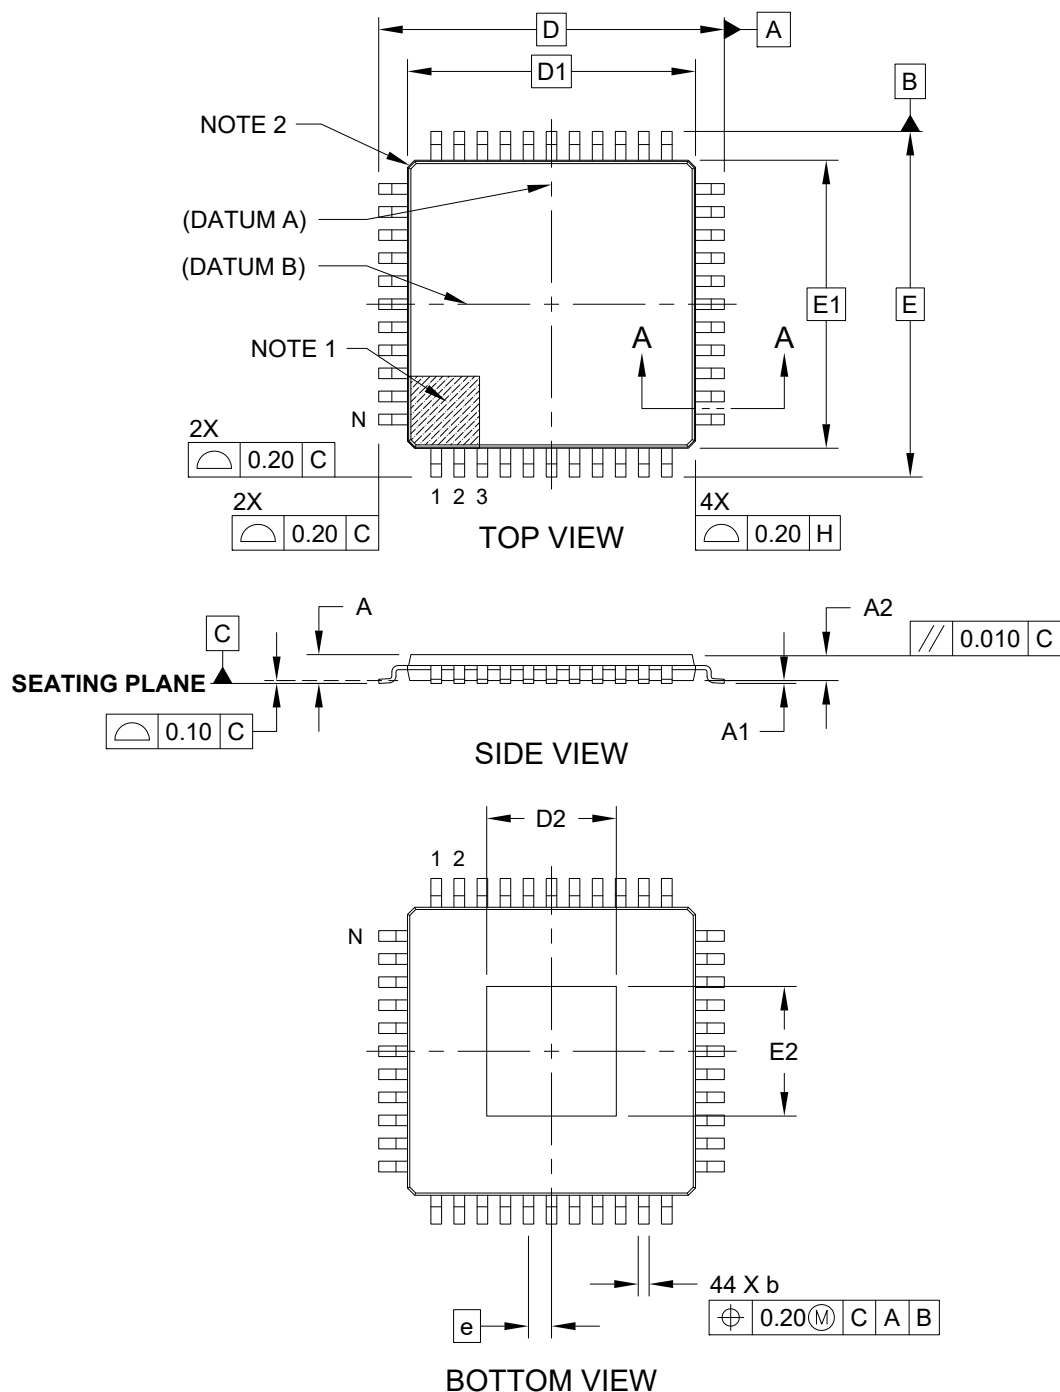

Packaging Diagrams and Parameters

44-Lead Plastic Quad Flatpack (PT) - 10x10x1.0 mm Body [TQFP] With 4.5x4.5 mm Exposed Pad, Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

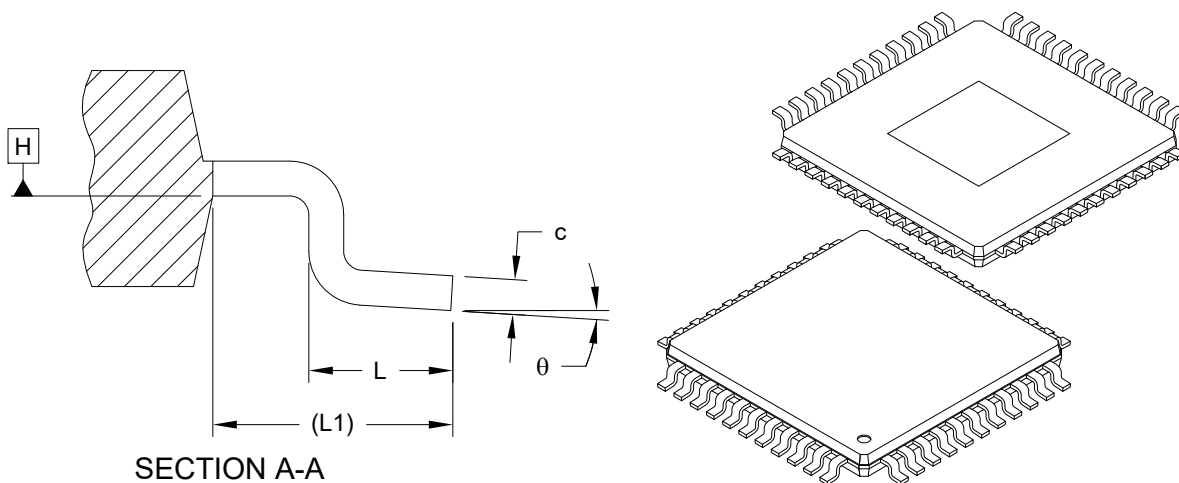

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Leads	N		44		
Pitch	e		0.80 BSC		
Overall Height	A		-	-	1.20
Standoff	A1		0.05	-	0.15
Molded Package Thickness	A2		0.95	1.00	1.05
Overall Width	E		12.00 BSC		
Molded Package Width	E1		10.00 BSC		
Exposed Pad Width	E2		4.40	4.50	4.60
Overall Length	D		12.00 BSC		
Molded Package Length	D1		10.00 BSC		
Exposed Pad Length	D2		4.40	4.50	4.60
Lead Width	b		0.30	0.37	0.45
Lead Thickness	c		0.09	-	0.20
Lead Length	L		0.45	0.60	0.75
Footprint	L1		1.00 REF		
Foot Angle	θ		0°	3.5°	7°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Exact shape of each corner is optional.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.