



56-Lead Plastic Quad Flat, No Lead Package (RV) - 8x8 mm Body [QFN]
With 5.1x5.1 Exposed Pad; Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

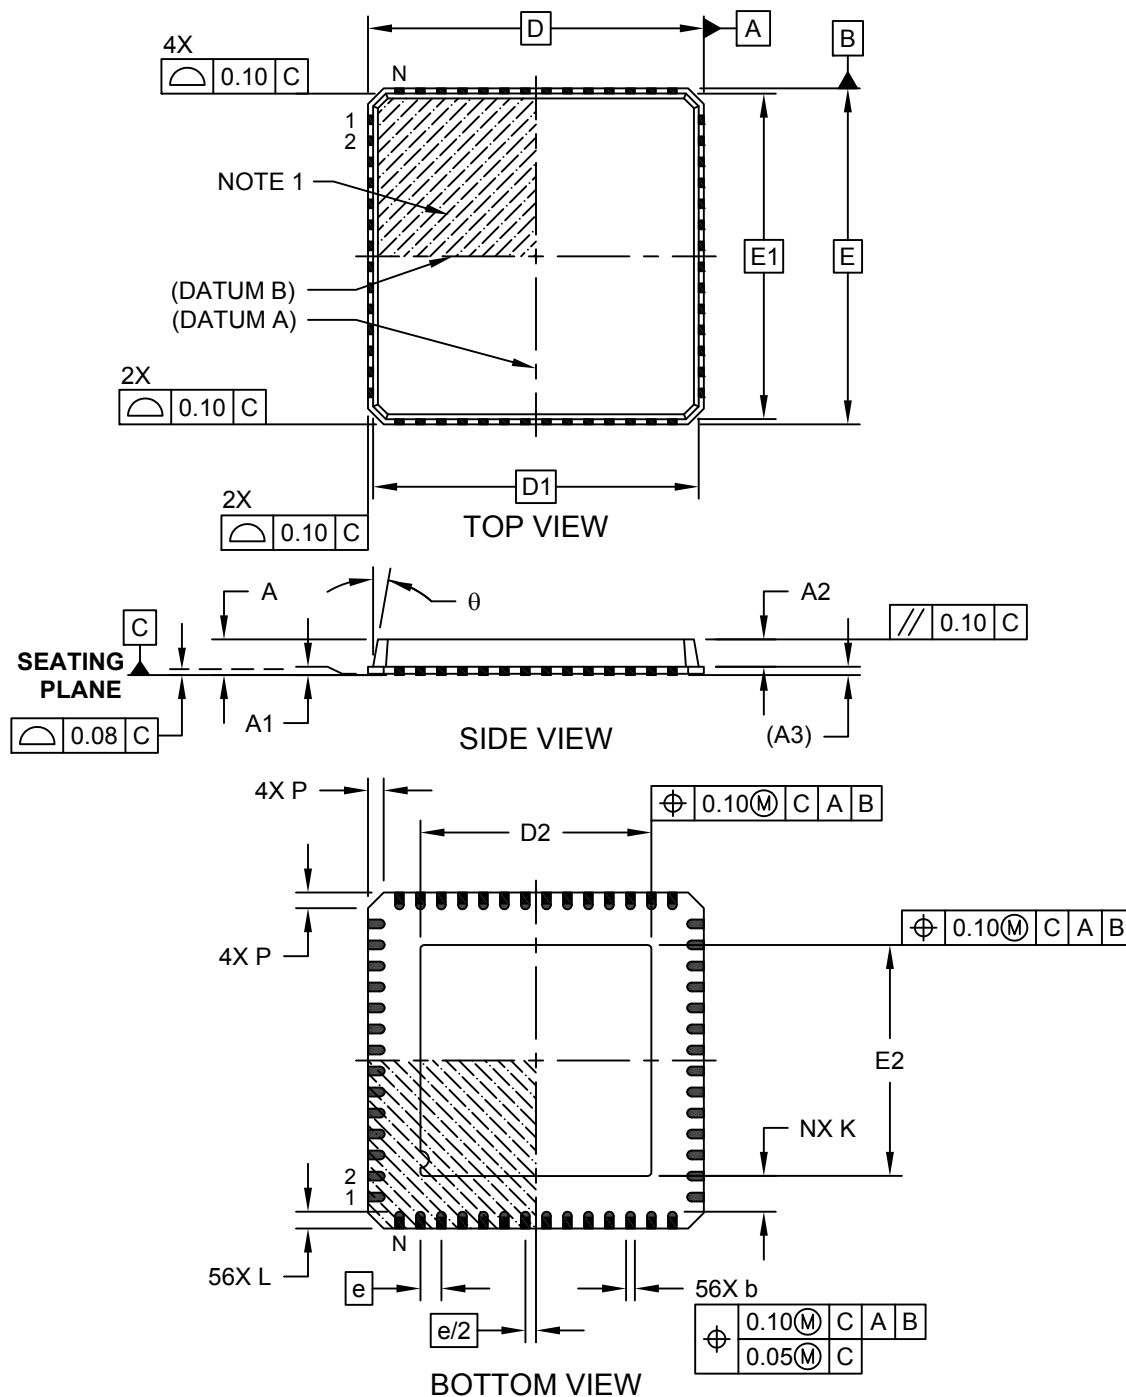

**56-Lead Plastic Quad Flat, No Lead Package (RV) - 8x8 mm Body [QFN]
With 5.1x5.1 Exposed Pad; Punch Singulated**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

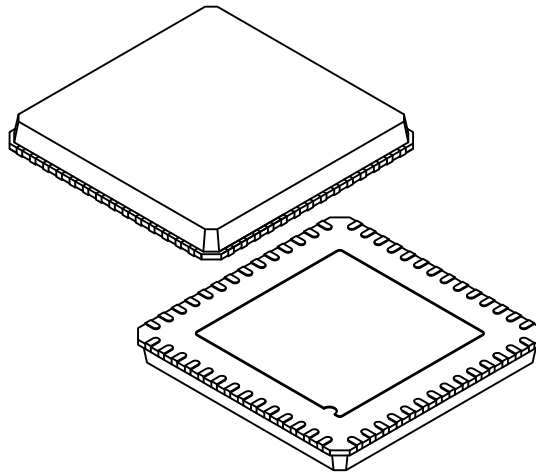


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Pins	N		56		
Pitch	e		0.50 BSC		
Overall Height	A		0.80	0.85	0.90
Standoff	A1		0.00	0.01	0.05
Mold Cap Height	A2		0.60	0.65	0.70
Terminal Thickness	(A3)		0.20 REF		
Overall Width	E		8.00 BSC		
Molded Top Width	E1		7.75 BSC		
Exposed Pad Width	E2		5.00	5.10	5.20
Overall Length	D		8.00 BSC		
Molded Top Length	D1		7.75 BSC		
Exposed Pad Length	D2		5.00	5.10	5.20
Corner Chamfer	P		0.24	0.42	0.60
Terminal Width	b		0.18	0.23	0.30
Terminal Length	L		0.30	0.40	0.50
Terminal-to-Exposed-Pad	K		0.20	-	-
Mold Draft Angle	θ		0°	-	12°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is punch singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

**56-Lead Plastic Quad Flat, No Lead Package (RV) - 8x8 mm Body [QFN]
With 5.1x5.1 Exposed Pad; Punch Singulated**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

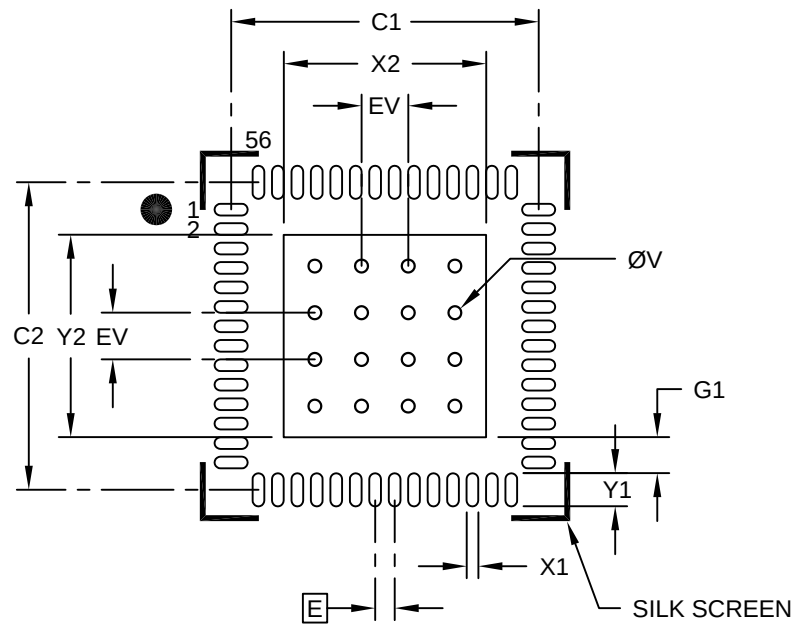

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			5.20
Optional Center Pad Length	Y2			5.20
Contact Pad Spacing	C1		7.90	
Contact Pad Spacing	C2		7.90	
Contact Pad Width (X56)	X1			0.30
Contact Pad Length (X56)	Y1			0.85
Contact Pad to Center Pad (X56)	G1	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-2224A