



## 20-Lead Ultra Thin Plastic Quad Flat, No Lead Package (JP) - 3x3x0.50 mm Body [UQFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

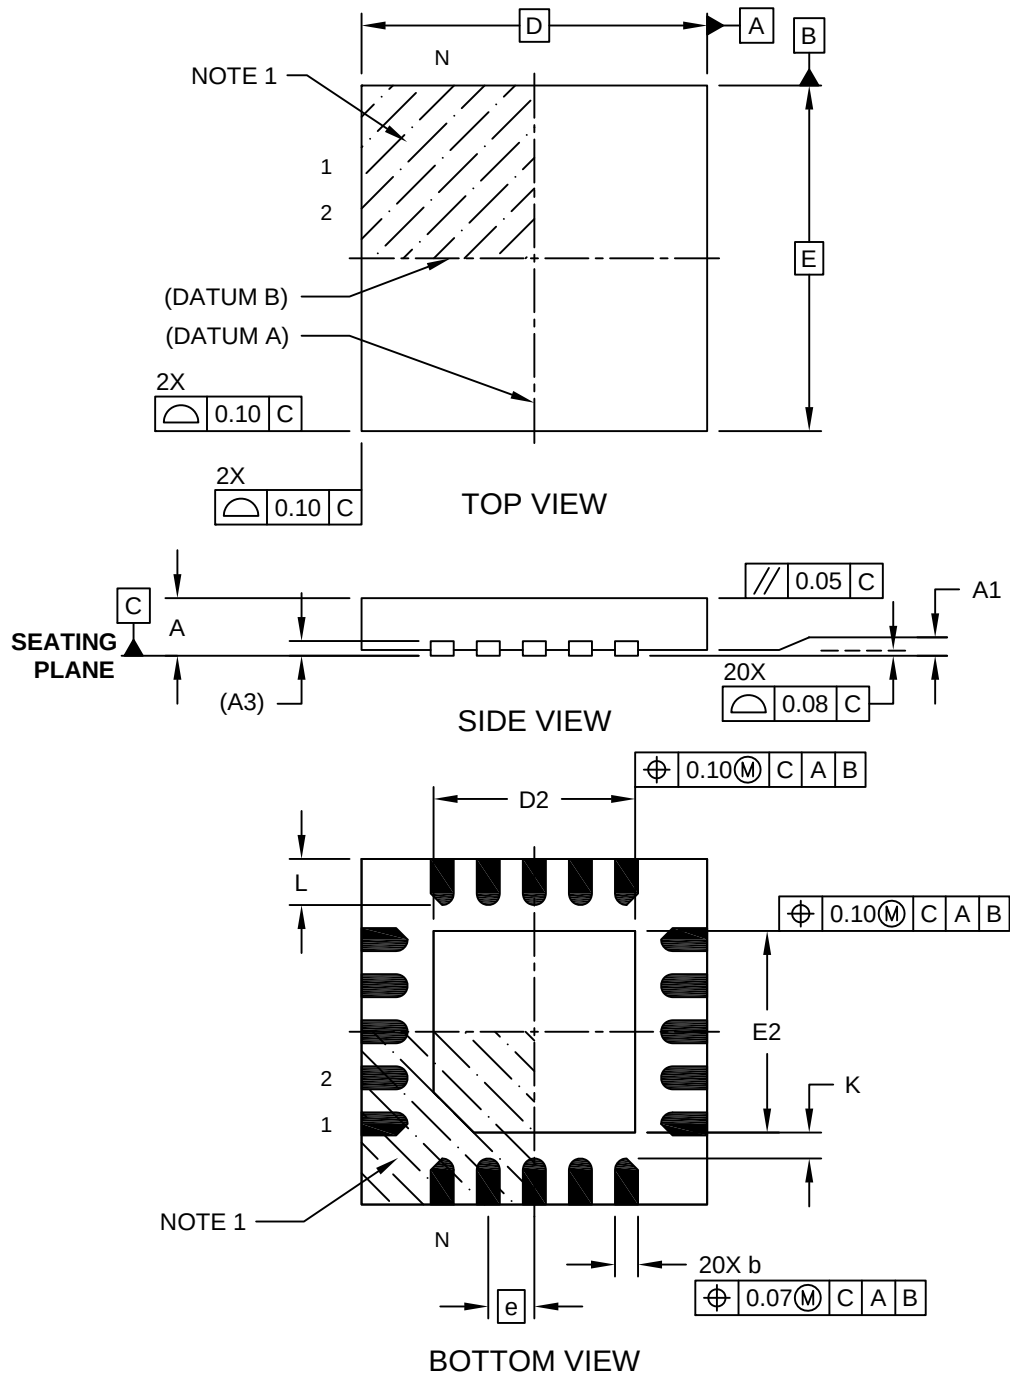

## 20-Lead Ultra Thin Plastic Quad Flat, No Lead Package (JP) - 3x3x0.50 mm Body [UQFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

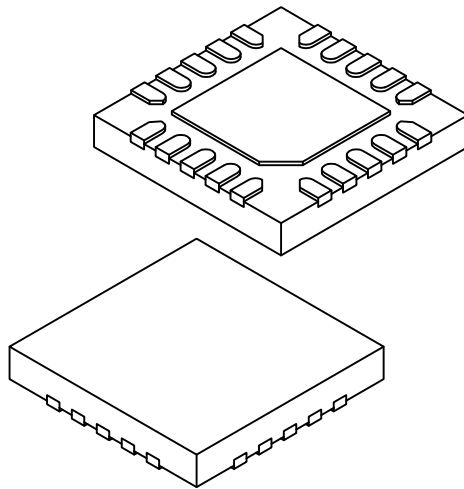


| Units                   |    | MILLIMETERS |      |      |
|-------------------------|----|-------------|------|------|
| Dimension Limits        |    | MIN         | NOM  | MAX  |
| Number of Terminals     | N  | 20          |      |      |
| Pitch                   | e  | 0.40        |      |      |
| Overall Height          | A  | 0.45        | 0.50 | 0.55 |
| Standoff                | A1 | 0.00        | 0.02 | 0.05 |
| Terminal Thickness      | A3 | 0.127 REF   |      |      |
| Overall Width           | E  | 3.00 BSC    |      |      |
| Exposed Pad Width       | E2 | 1.65        | 1.75 | 1.85 |
| Overall Length          | D  | 3.00 BSC    |      |      |
| Exposed Pad Length      | D2 | 1.65        | 1.75 | 1.85 |
| Terminal Width          | b  | 0.15        | 0.20 | 0.25 |
| Terminal Length         | L  | 0.30        | 0.40 | 0.50 |
| Terminal-to-Exposed-Pad | K  | 0.20        | -    | -    |

### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
  - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
  - REF: Reference Dimension, usually without tolerance, for information purposes only.

## 20-Lead Ultra Thin Plastic Quad Flat, No Lead Package (JP) - 3x3x0.5 mm Body [UQFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

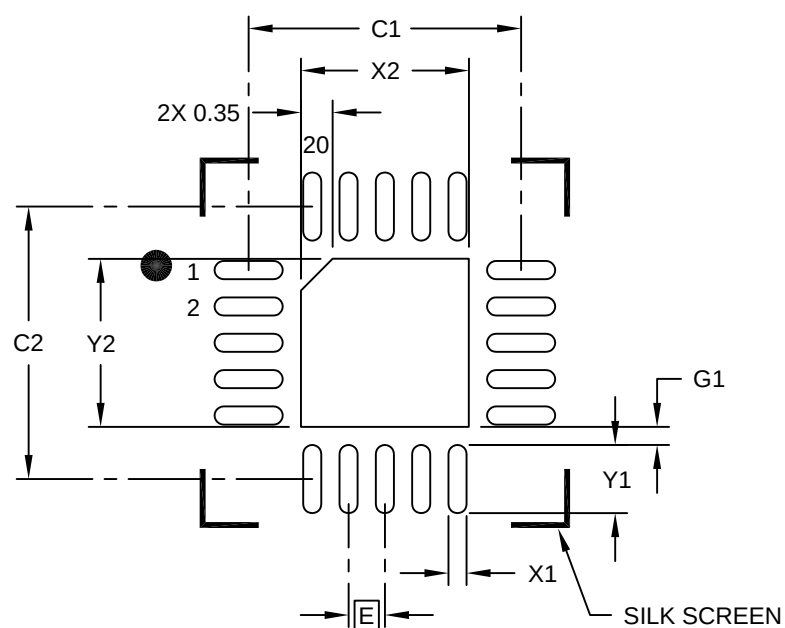

RECOMMENDED LAND PATTERN

| Units                           |    | MILLIMETERS |      |      |
|---------------------------------|----|-------------|------|------|
| Dimension Limits                |    | MIN         | NOM  | MAX  |
| Contact Pitch                   | E  | 0.40 BSC    |      |      |
| Optional Center Pad Width       | X2 |             |      | 1.85 |
| Optional Center Pad Length      | Y2 |             |      | 1.85 |
| Contact Pad Spacing             | C1 |             | 3.00 |      |
| Contact Pad Spacing             | C2 |             | 3.00 |      |
| Contact Pad Width (X20)         | X1 |             |      | 0.20 |
| Contact Pad Length (X20)        | Y1 |             |      | 0.75 |
| Contact Pad to Center Pad (X20) | G1 | 0.20        |      |      |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.