



**8-Terminal Plastic Ultra Thin Dual Flat No Lead Package (UB) -
4x3x0.55 mm Body [UDFN (USON)]**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

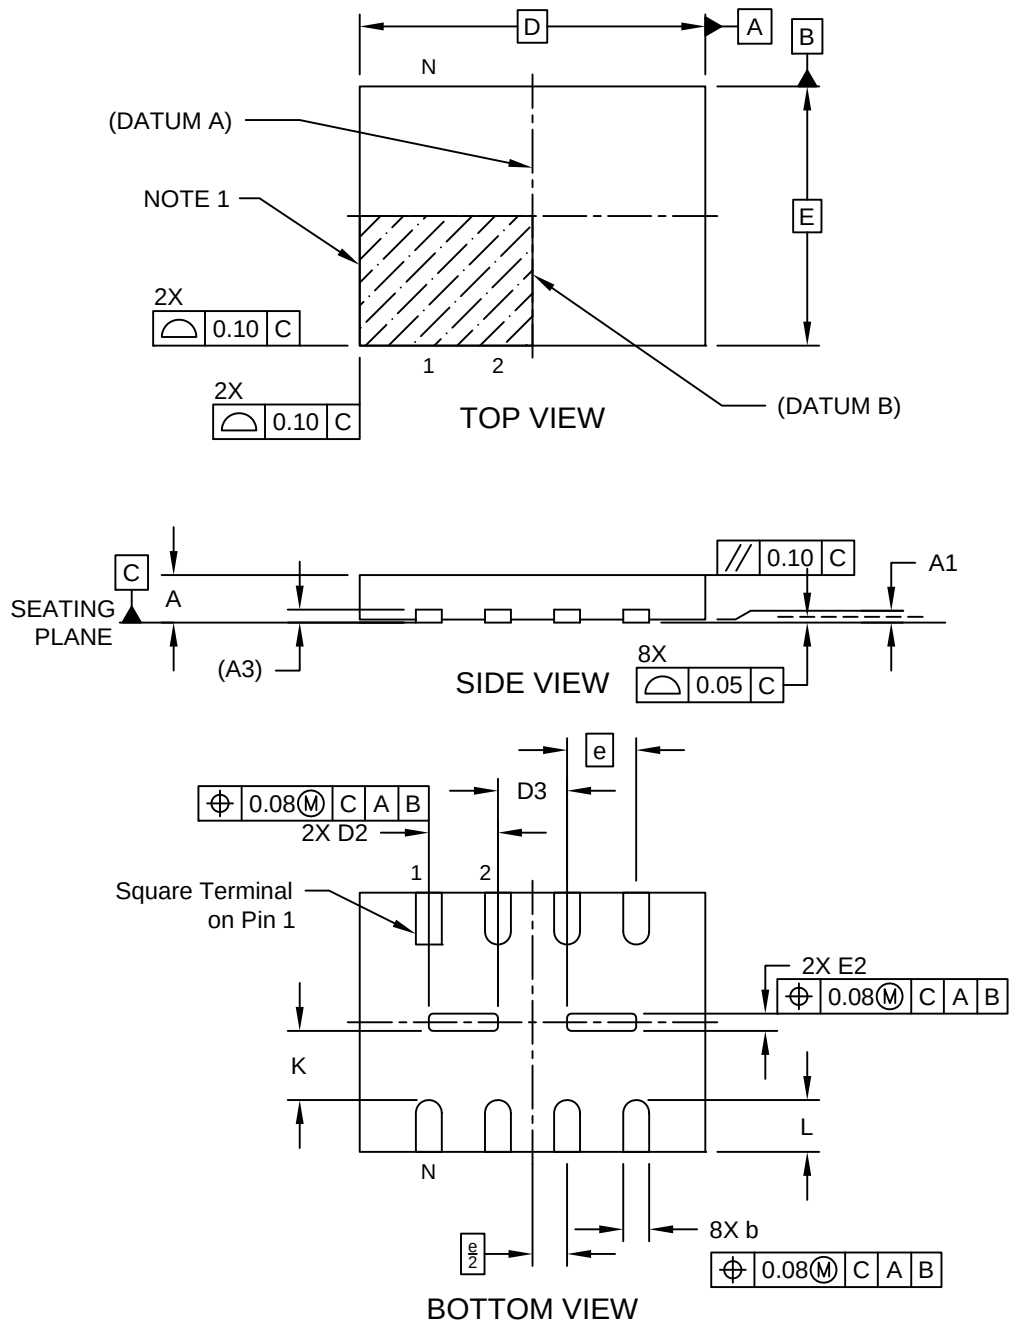

8-Terminal Plastic Ultra Thin Dual Flat No Lead Package (UB) - 4x3x0.55 mm Body [UDFN (USON)]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

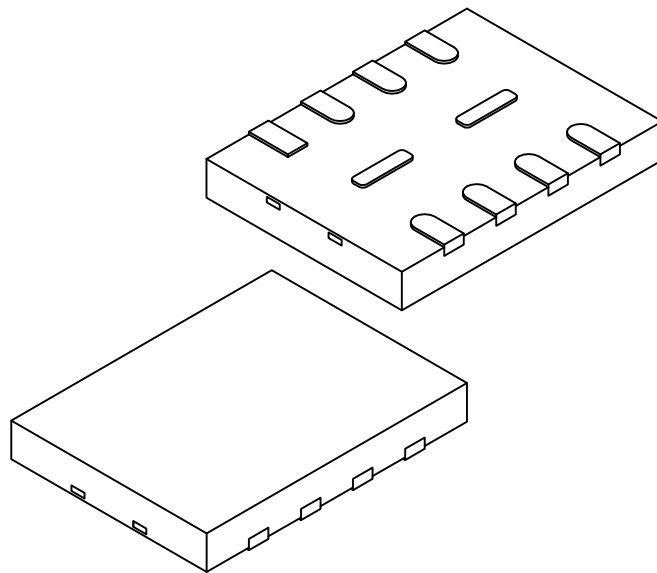


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	8		
Pitch	e	0.80 BSC		
Overall Height	A	0.45	0.55	0.60
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.127 REF		
Overall Width	E	3.00 BSC		
Exposed Pad Width	E2	0.17	0.20	0.23
Overall Length	D	4.00 BSC		
Exposed Pad Length	D2	0.77	0.80	0.83
Distance Between Exposed Pads	D3	0.77	0.80	0.83
Terminal Width	b	0.25	0.30	0.35
Terminal Length	L	0.55	0.60	0.65
Terminal-to-Exposed-Pad	K	0.70	-	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

8-Terminal Plastic Ultra Thin Dual Flat No Lead Package (UB) - 4x3x0.55 mm Body [UDFN (USON)]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

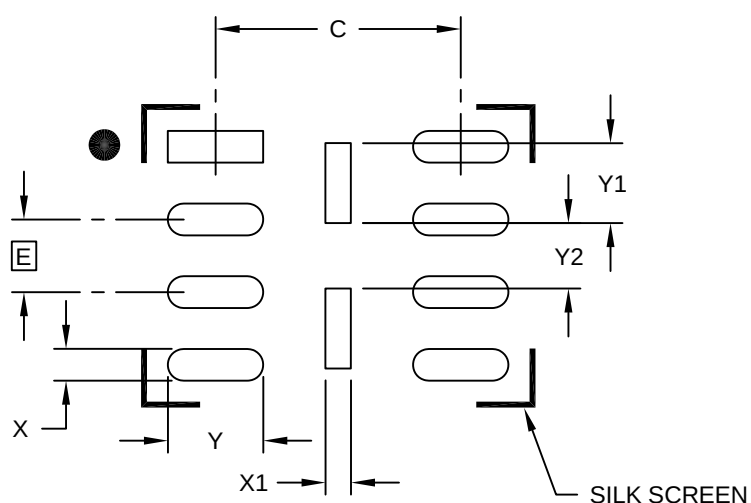

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Optional Center Pad Width	X1			0.28
Center Pad Length (X2)	Y1			0.88
Center Pad Spacing	Y2	0.72		
Contact Pad Spacing	C		2.70	
Contact Pad Width (X8)	X			0.35
Contact Pad Length (X8)	Y			1.05

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-2271A