


Packaging Diagrams and Parameters

8-Lead Very Thin Plastic Quad Flat, No Lead Package (8RX) - 4x4x0.9 mm Body [VQFN] With Dual 1.45mm Exposed Pads


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

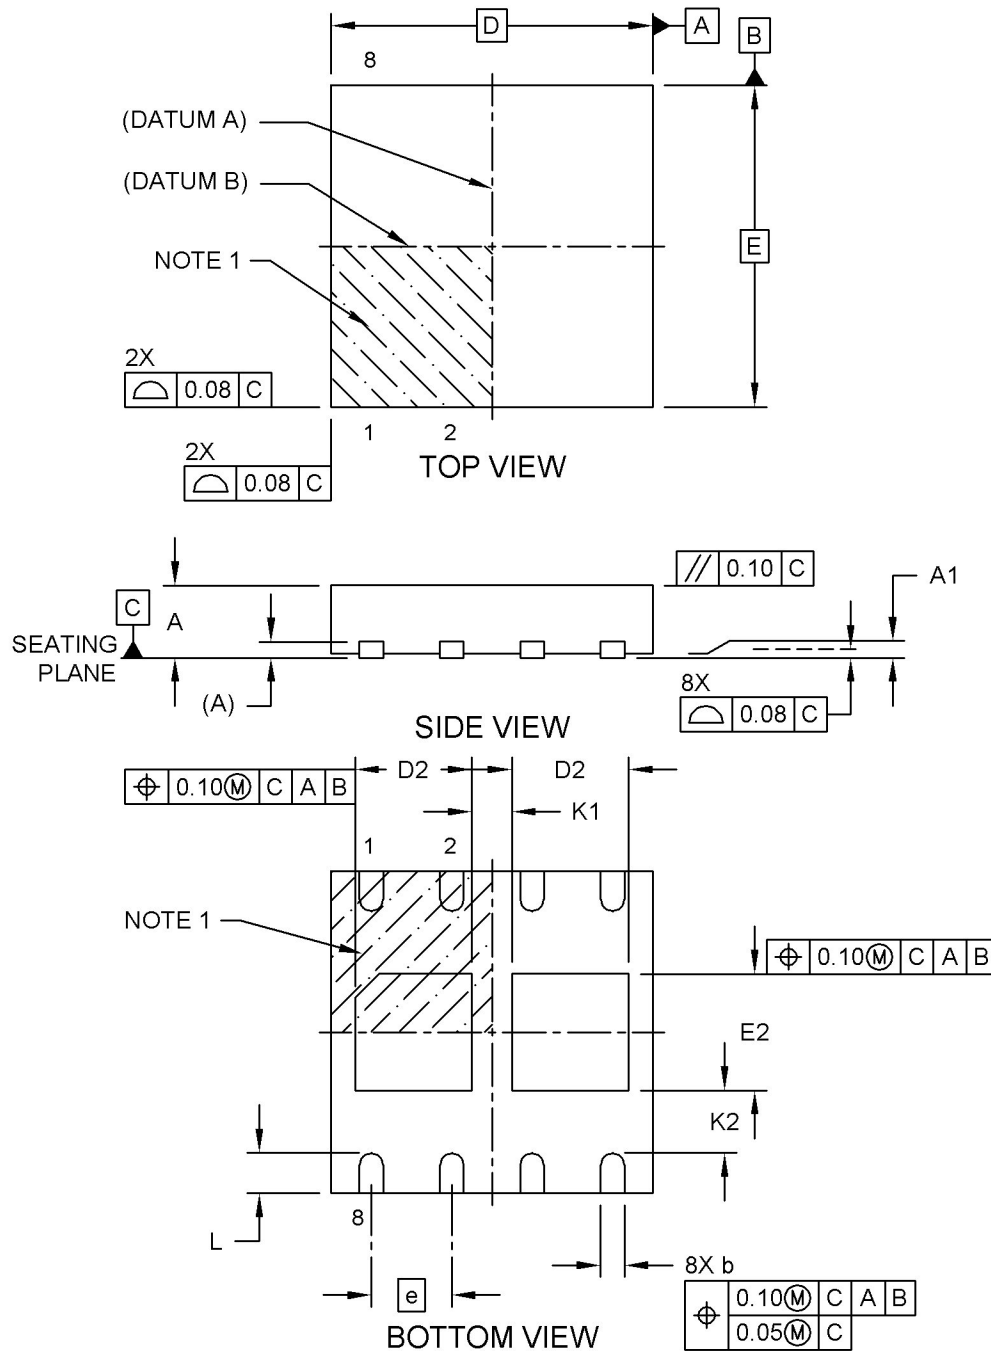

Packaging Diagrams and Parameters

8-Lead Very Thin Plastic Quad Flat, No Lead Package (8RX) - 4x4x0.9 mm Body [VQFN] With Dual 1.45mm Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

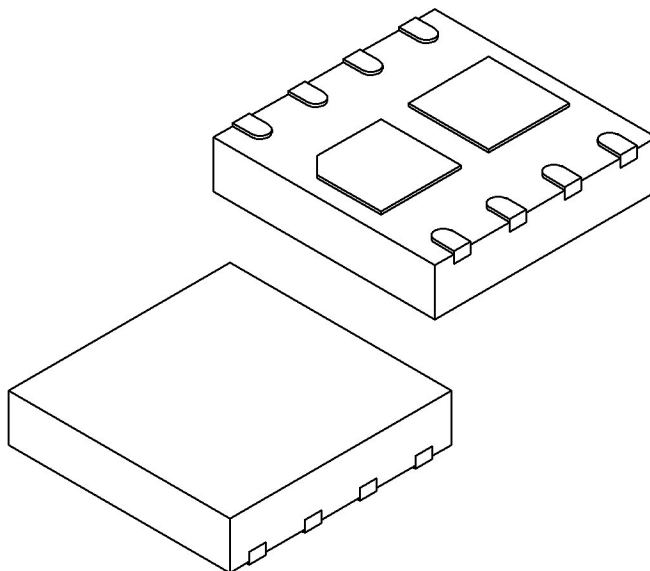

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		8		
Pitch	e		1.00 BSC		
Overall Height	A		0.80	0.85	0.90
Standoff	A1		0.00	–	0.05
Terminal Thickness	A3		0.20 REF		
Overall Length	D		4.00 BSC		
Exposed Pad Length (X2)	D2		1.35	1.45	1.55
Overall Width	E		4.00 BSC		
Exposed Pad Width (X2)	E2		1.35	1.45	1.55
Terminal Width	b		0.25	0.30	0.35
Terminal Length	L		0.40	0.50	0.60
Exposed Pad to Exposed Pad	K1		0.50 REF		
Terminal to Exposed Pad	K2		0.775 REF		


Notes:

- Pin 1 visual index feature may vary but must be located within the hatched area.
- Package is saw singulated.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

8-Lead Very Thin Plastic Dual Flat, No Lead Package (8RX) - 4x4x0.9 mm Body [VDFN] With Dual 1.45mm Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

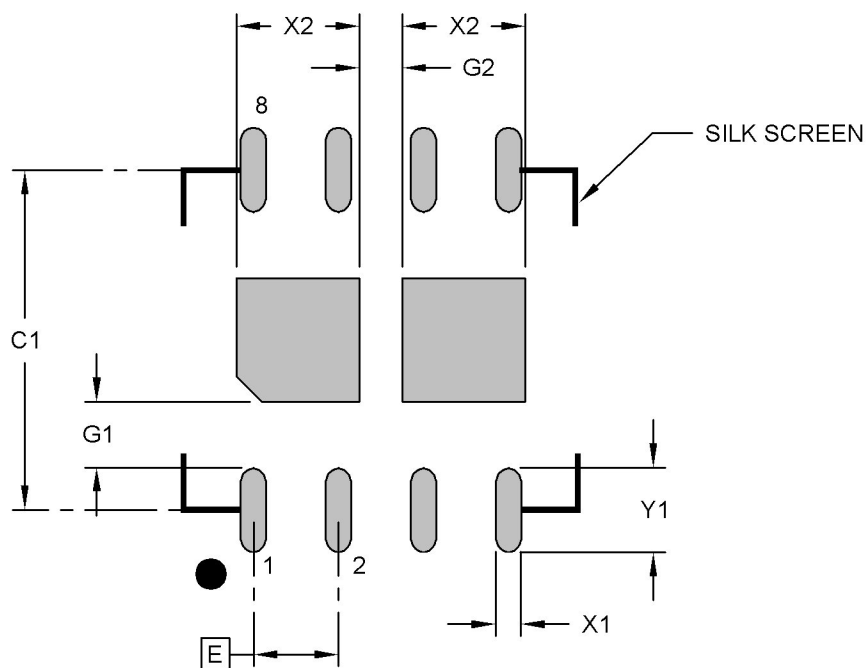

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.00 BSC		
Center Pad Width (X2)	X2			1.45
Center Pad Length (X2)	Y2			1.45
Contact Pad Spacing	C1		4.00	
Contact Pad Width (X8)	X1			0.30
Contact Pad Length (X8)	Y1			1.00
Contact Pad to Center Pad (X8)	G1	0.775		
Center Pad to Center Pad	G2	0.50		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2285 Rev A