



# 10-Lead Very, Very Thin Plastic Dual Flat, No Lead Package (US) - 4x4 mm Body [WDFN]; Supertex Legacy Package

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

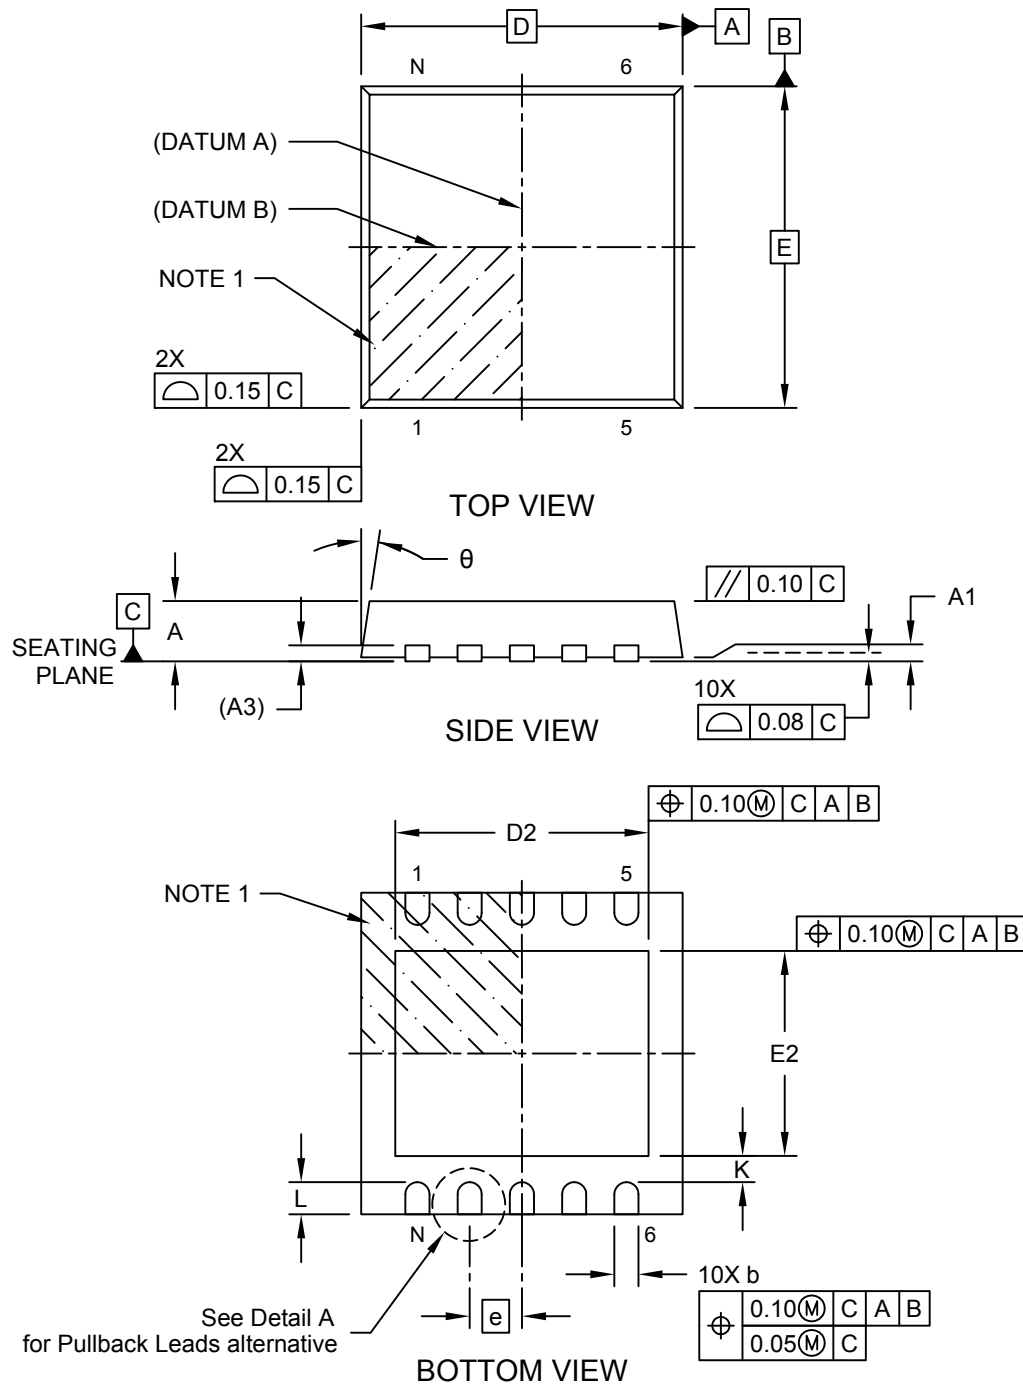

# 10-Lead Very, Very Thin Plastic Dual Flat, No Lead Package (US) - 4x4 mm Body [WDFN]; Supertex Legacy Package

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

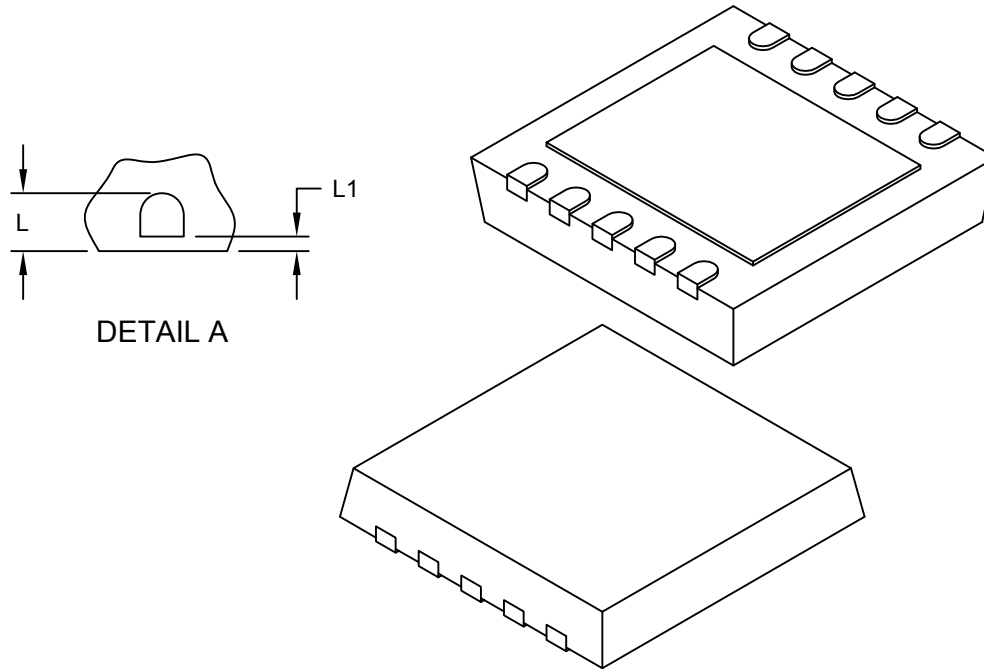

|                         |    | Units | MILLIMETERS |      |      |
|-------------------------|----|-------|-------------|------|------|
| Dimension Limits        |    |       | MIN         | NOM  | MAX  |
| Number of Terminals     | N  |       | 10          |      |      |
| Pitch                   | e  |       | 0.65 BSC    |      |      |
| Overall Height          | A  |       | 0.70        | 0.75 | 0.80 |
| Standoff                | A1 |       | 0.00        | 0.02 | 0.05 |
| Terminal Thickness      | A3 |       | 0.20 REF    |      |      |
| Overall Length          | D  |       | 4.00 BSC    |      |      |
| Exposed Pad Length      | D2 |       | 2.80        | -    | 3.50 |
| Overall Width           | E  |       | 4.00 BSC    |      |      |
| Exposed Pad Width       | E2 |       | 2.30        | -    | 2.80 |
| Terminal Width          | b  |       | 0.25        | 0.30 | 0.35 |
| Terminal Length         | L  |       | 0.30        | 0.40 | 0.50 |
| Pullback                | L1 |       | -           | -    | 0.15 |
| Mold Angle              | θ  |       | 0°          | 7°   | 14°  |
| Terminal-to-Exposed-Pad | K  |       | 0.20        | -    | -    |

## Notes:


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

# 10-Lead Very, Very Thin Plastic Dual Flat, No Lead Package (US) - 4x4 mm Body [WDFN]; Supertex Legacy Package

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

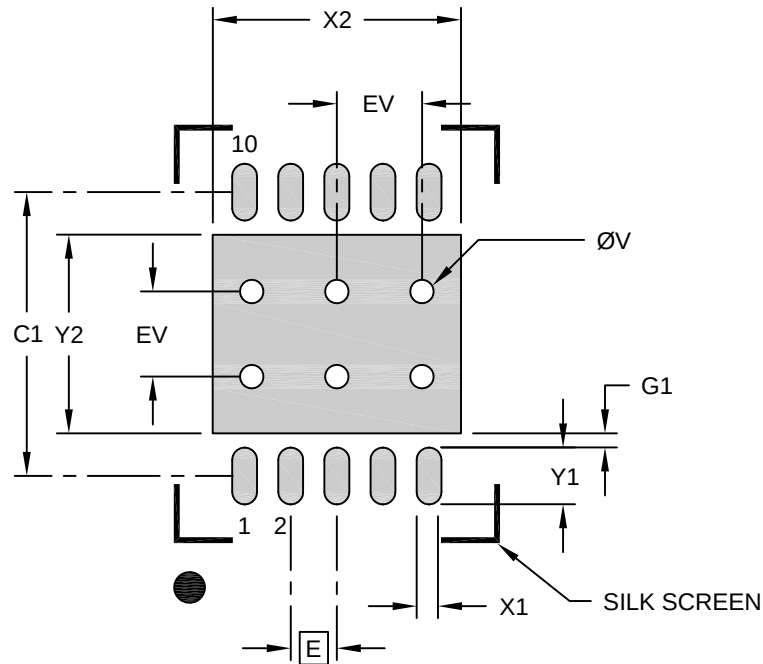

## RECOMMENDED LAND PATTERN

| Units                           |    | MILLIMETERS |      |      |
|---------------------------------|----|-------------|------|------|
| Dimension Limits                |    | MIN         | NOM  | MAX  |
| Contact Pitch                   | E  | 0.65 BSC    |      |      |
| Optional Center Pad Width       | X2 |             |      | 3.50 |
| Optional Center Pad Length      | Y2 |             |      | 2.80 |
| Contact Pad Spacing             | C1 |             | 4.00 |      |
| Contact Pad Width (X10)         | X1 |             |      | 0.35 |
| Contact Pad Length (X10)        | Y1 |             |      | 0.80 |
| Contact Pad to Center Pad (X10) | G1 | 0.20        |      |      |
| Thermal Via Diameter            | V  |             | 0.33 |      |
| Thermal Via Pitch               | EV |             | 1.20 |      |

### Notes:

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process