


19-Lead Very, Very Thin Plastic Dual Flat, No Lead Package (UU) - 7x5 mm Body [WDFN]; Supertex Legacy Package


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

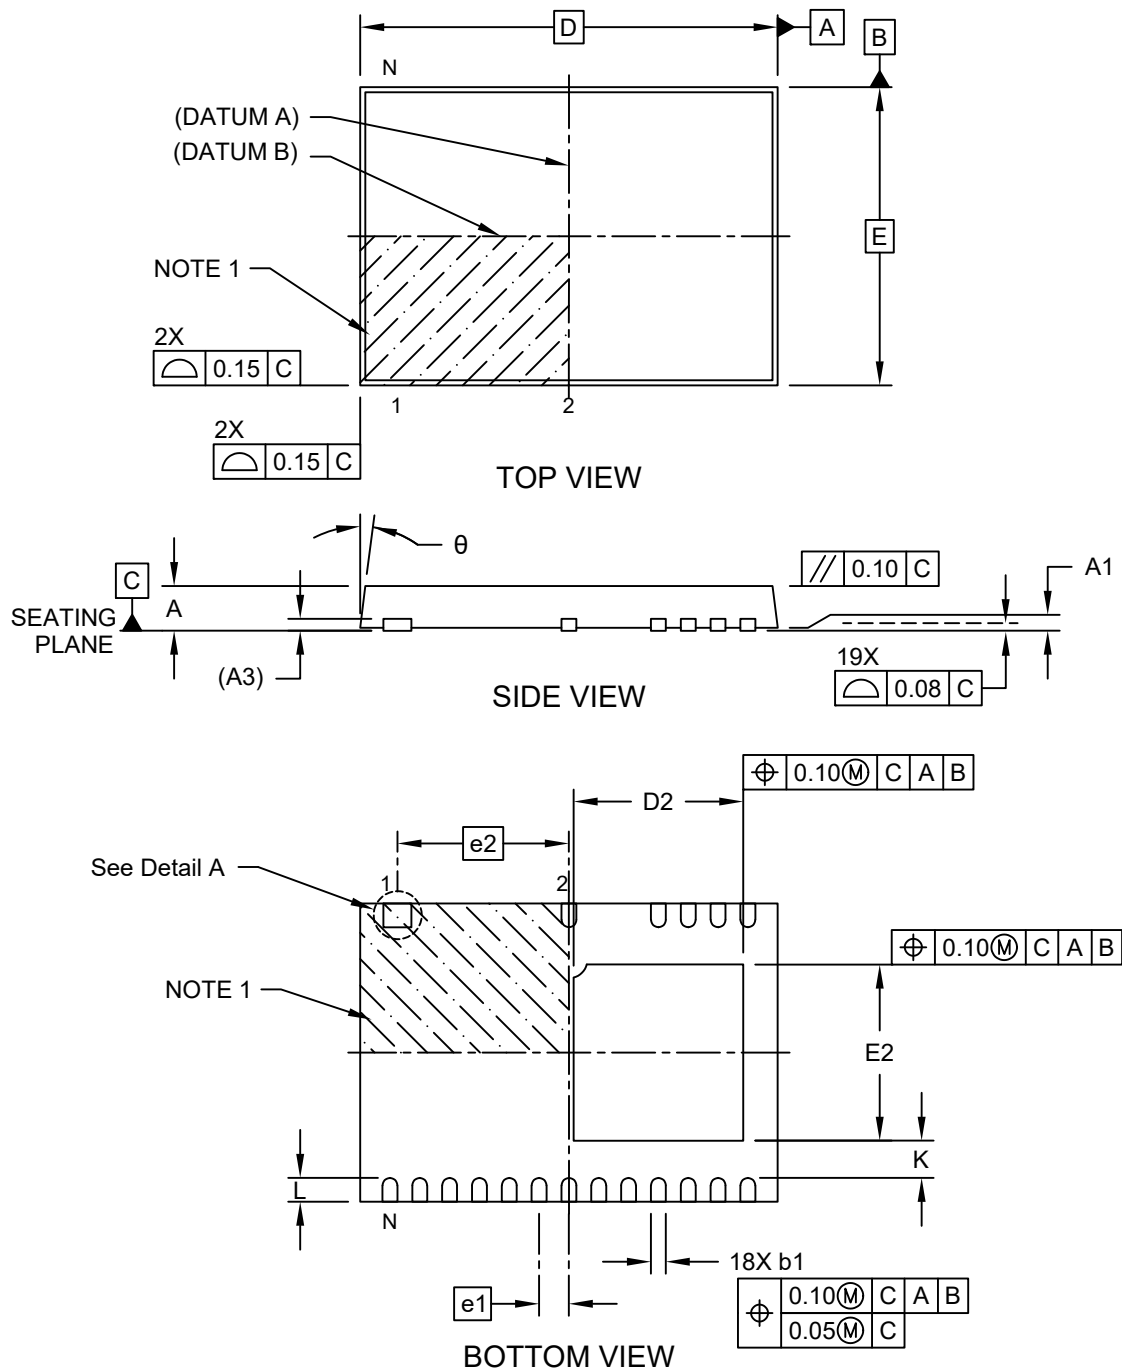

Microchip Technology Drawing C04-295 Rev A Sheet 1 of 2

19-Lead Very, Very Thin Plastic Dual Flat, No Lead Package (UU) - 7x5 mm Body [WDFN]; Supertex Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

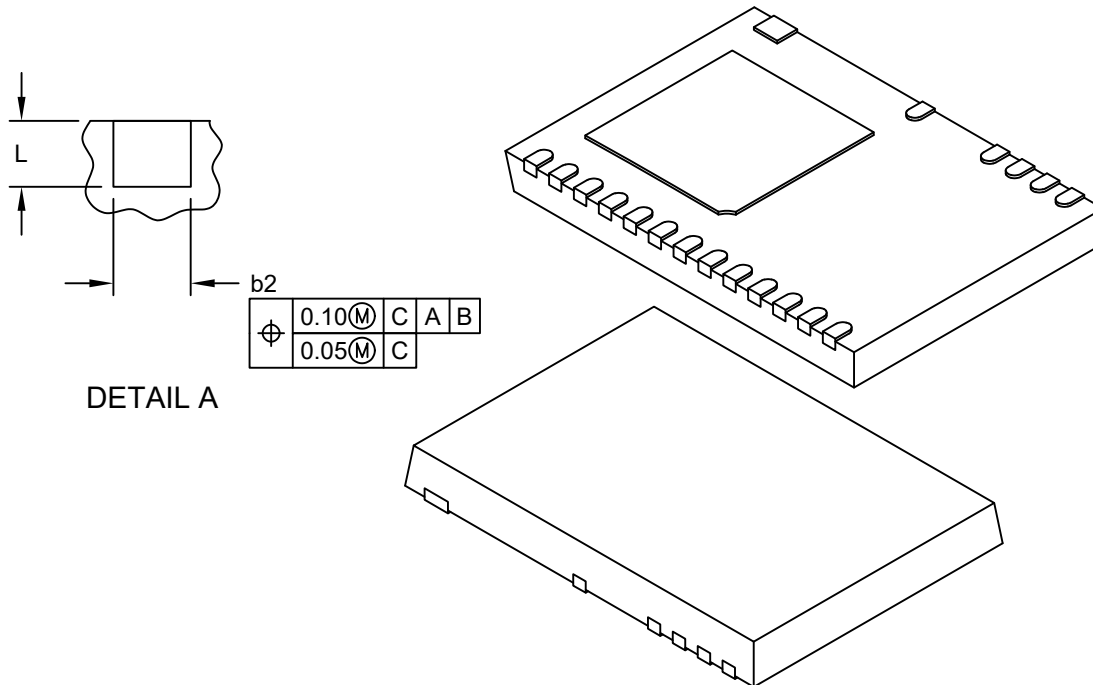


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	19		
Pitch	e1	0.50 BSC		
Pitch	e2	2.875 BSC		
Overall Height	A	0.70	0.75	0.80
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.20 REF		
Overall Length	D	7.00 BSC		
Exposed Pad Length	D2	2.692	2.842	2.942
Overall Width	E	5.00 BSC		
Exposed Pad Width	E2	2.802	2.952	3.052
Terminal Width	b1	0.20	0.25	0.30
Terminal Width	b2	0.42	0.47	0.52
Terminal Length	L	0.30	0.40	0.50
Mold Angle	θ	0°	7°	14°
Terminal-to-Exposed-Pad	K	0.20	-	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

19-Lead Very, Very Thin Plastic Dual Flat, No Lead Package (UU) - 7x5 mm Body [WDFN]; Supertex Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

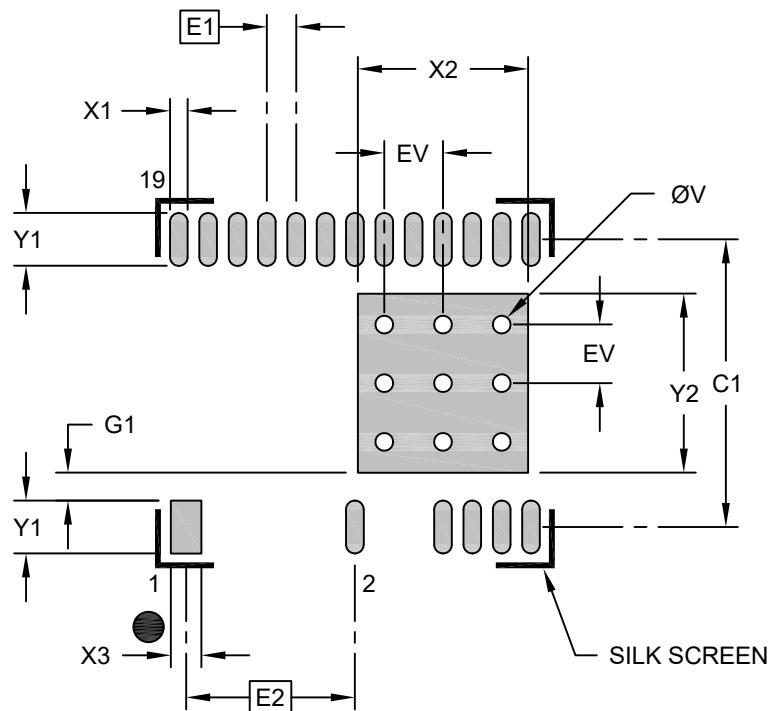

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E1	0.50 BSC		
Contact Pitch	E2	2.875 BSC		
Optional Center Pad Width	X2			2.90
Optional Center Pad Length	Y2			3.05
Contact Pad Spacing	C1		4.90	
Contact Pad Width (X18)	X1			0.30
Contact Pad Length (X19)	Y1			0.90
Contact Pad Width	X3			0.52
Contact Pad to Center Pad (X20)	G1	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2295 Rev A