



256-Ball Heat Spreader Ball Grid Array (9MX) - 14x14x1.7 mm Body [HSBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

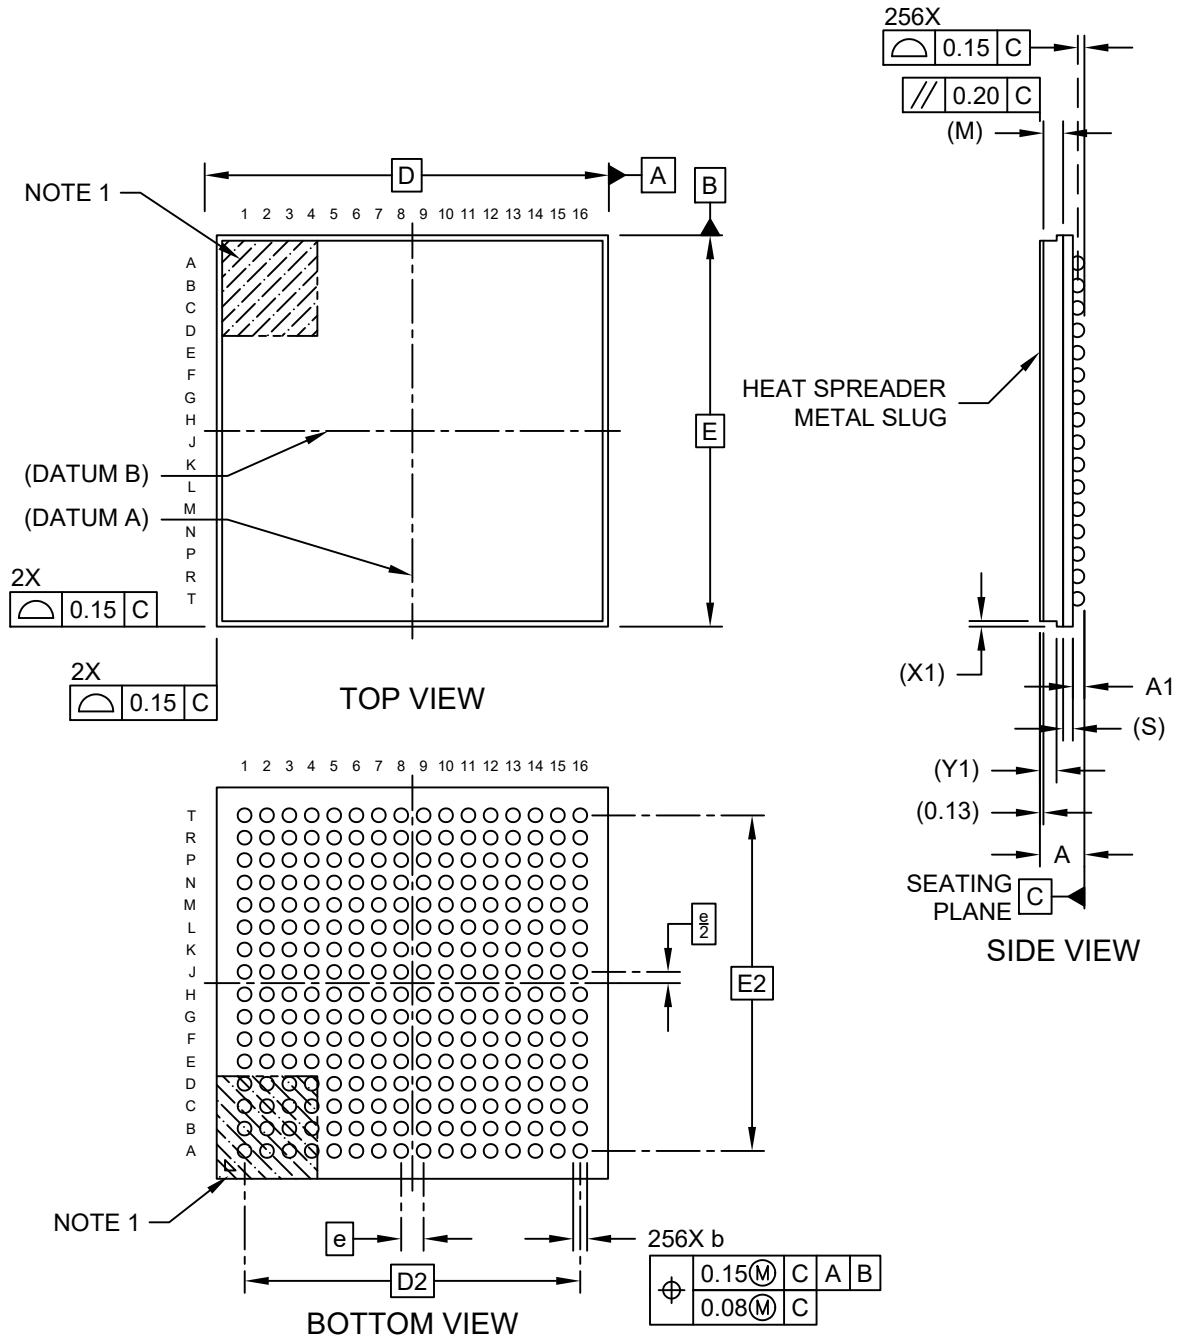

256-Ball Heat Spreader Ball Grid Array (9MX) - 14x14x1.7 mm Body [HSBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

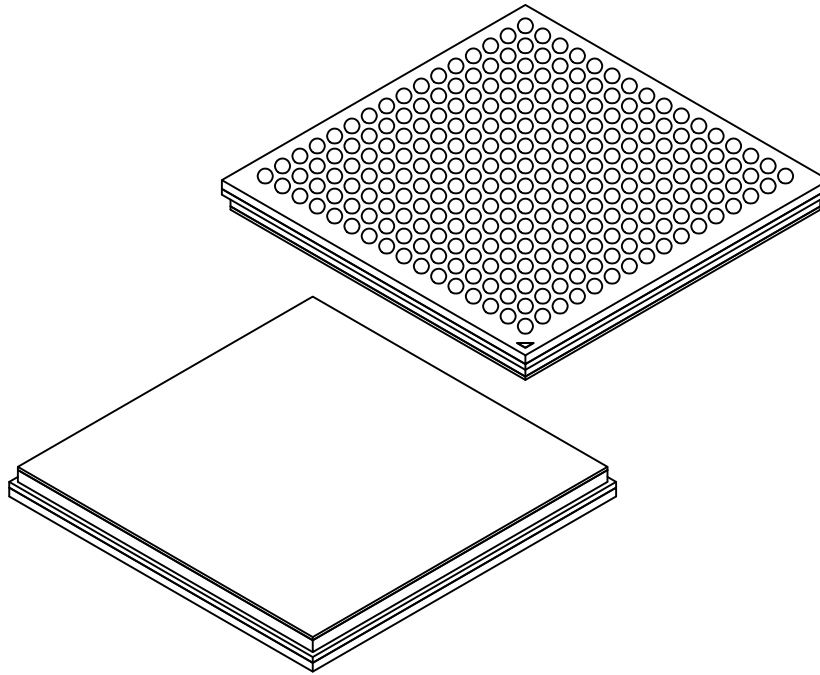


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		256		
Pitch	e		0.80 BSC		
Overall Height	A		–	–	1.70
Ball Height	A1		0.36	–	0.46
Mold Thickness	M		0.70 REF		
Substrate Thickness	S		0.352 REF		
Step Cut Width	X1		0.00	–	0.20
Step Cut Depth	Y1		0.00	–	0.60
Overall Length	D		14.00 BSC		
Ball Array Length	D2		12.00 BSC		
Overall Width	E		14.00 BSC		
Ball Array Width	E2		12.00 BSC		
Ball Width	b		0.44	–	0.64
Ball Diameter			0.50 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

256-Ball Heat Spreader Ball Grid Array (9MX) - 14x14x1.7 mm Body [HSBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

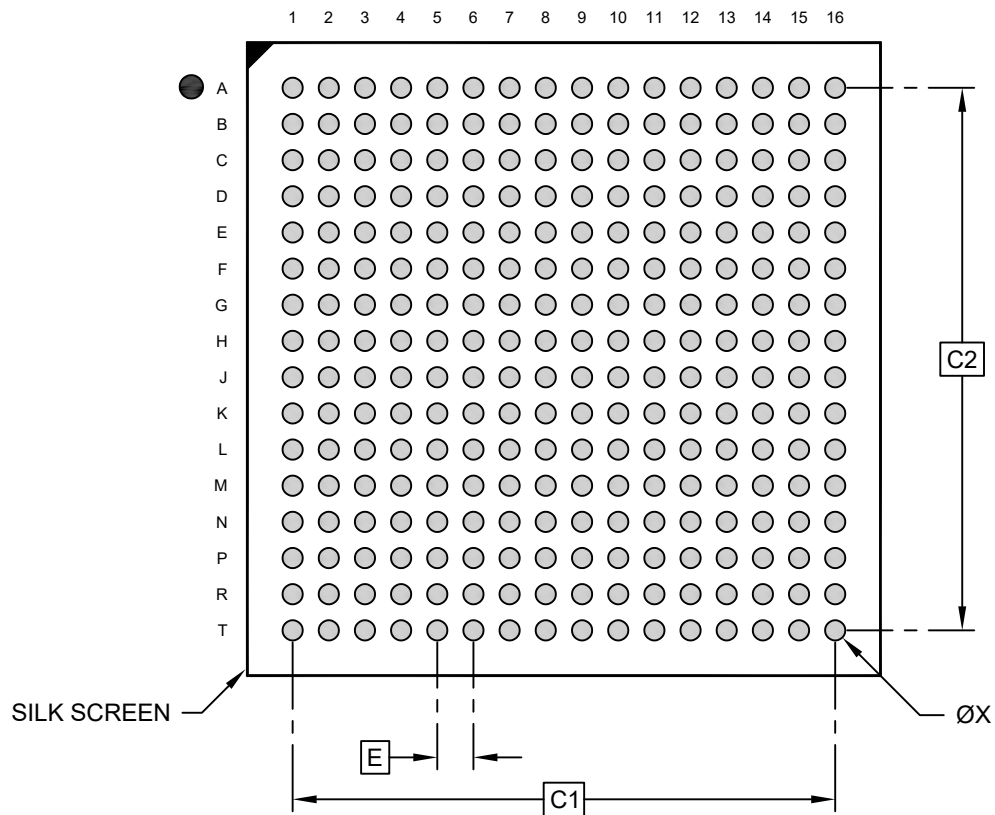

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1	12.00 BSC		
Contact Pad Spacing	C2	12.00 BSC		
Contact Pad Width (Xnn)	X			0.45

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-2324 Rev A