



144-Ball Extremely Thin Fine Pitch Ball Grid Array (TZ) - 7x7 mm Body [XFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

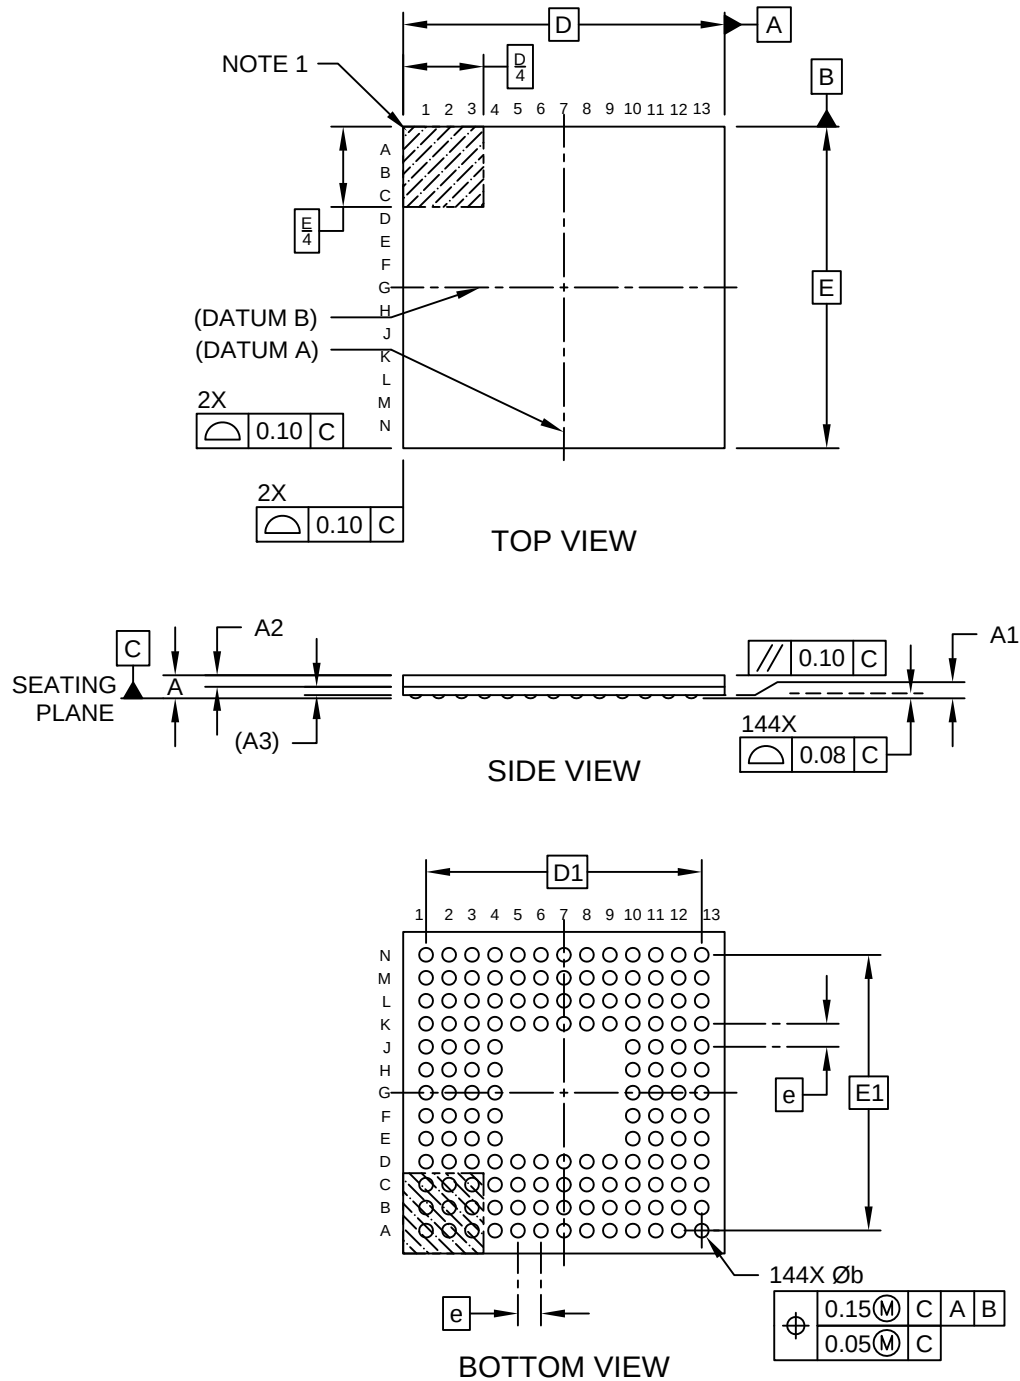

144-Ball Extremely Thin Fine Pitch Ball Grid Array (TZ) - 7x7 mm Body [XFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

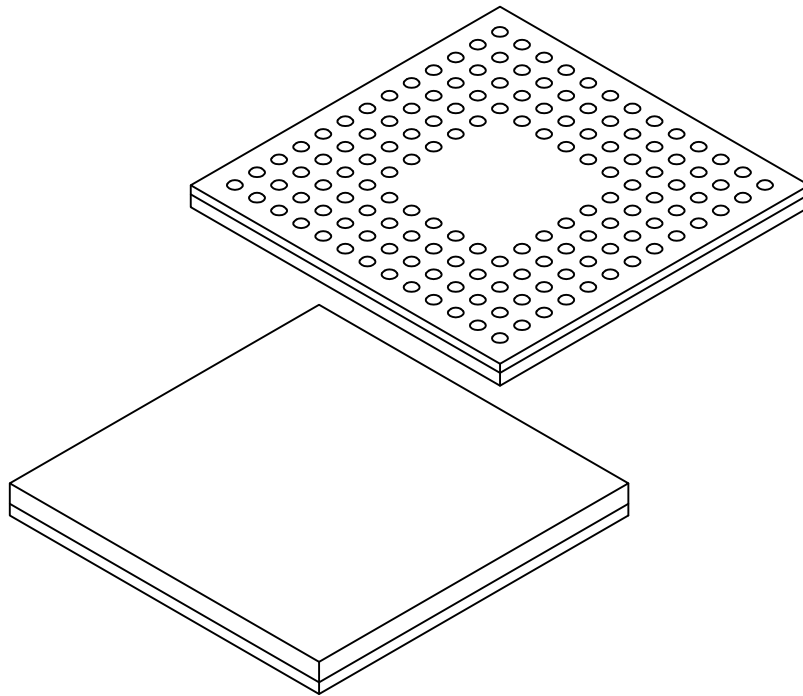


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	144		
Pitch	e	0.50 BSC		
Overall Height	A	-	-	0.50
Standoff	A1	0.045	0.070	0.095
Mold Thickness	A2	0.22	0.25	0.28
Substrate Thickness	A3	0.18 REF		
Overall Length	D	7.00 BSC		
Overall Terminal Spacing	D1	6.00 BSC		
Overall Width	E	7.00 BSC		
Overall Terminal Spacing	E1	6.00 BSC		
Terminal Diameter	b	0.25	0.30	0.35

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

144-Ball Extremely Thin Fine Pitch Ball Grid Array (TZ) - 7x7 mm Body [XFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

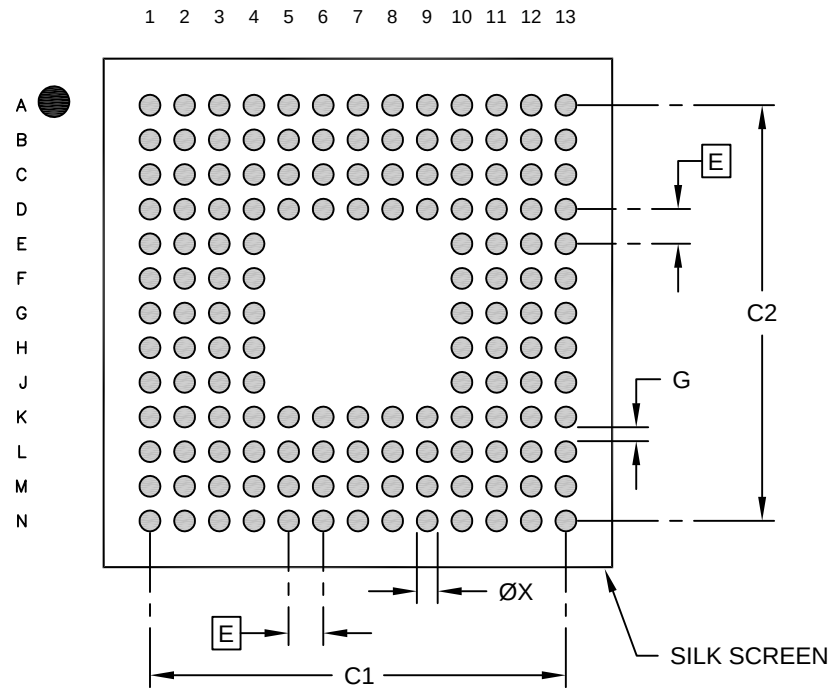

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Overall Contact Pad Spacing	C1		6.00	
Overall Contact Pad Spacing	C2		6.00	
Contact Pad Width (X144)	X1			0.30
Contact Pad to Contact Pad	G	0.25		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.