



8-Lead Plastic Super-Thin Dual Small Outline No-Lead (8X) - 1.5x1.5 mm Body [X2SON] With 1.2x0.7 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

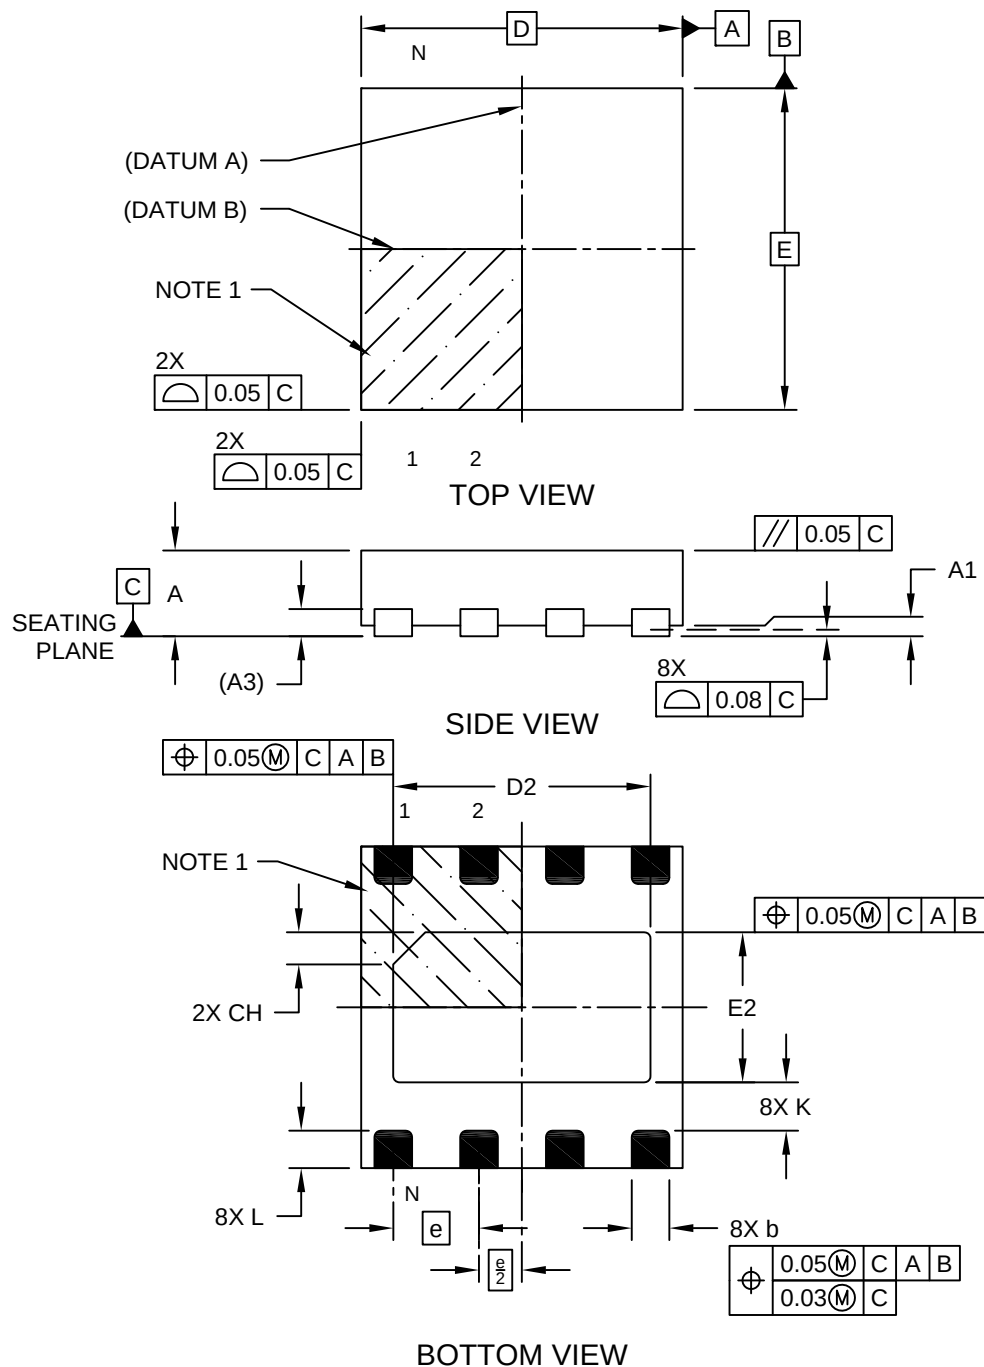

8-Lead Plastic Super-Thin Dual Small Outline No-Lead (8X) - 1.5x1.5 mm Body [X2SON] With 1.2x0.7 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

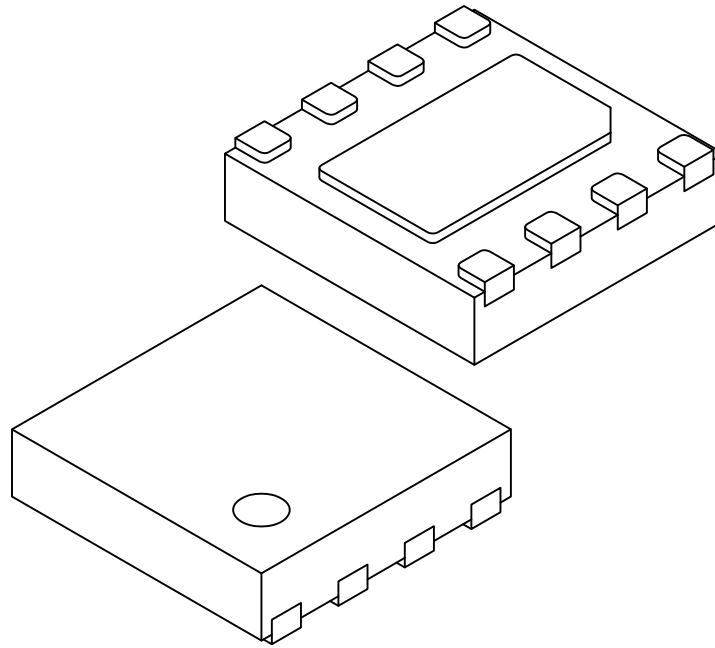


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		8		
Pitch	e		0.40 BSC		
Overall Height	A		0.30	0.35	0.40
Standoff	A1		0.00	0.02	0.05
Terminal Thickness	A3		0.127 REF		
Overall Width	E		1.50 BSC		
Exposed Pad Width	E2		0.65	0.70	0.75
Overall Length	D		1.50 BSC		
Exposed Pad Length	D2		1.15	1.20	1.25
Exposed Pad Corner Chamfer	CH		-	0.15	-
Terminal Width	b		0.125	0.175	0.225
Terminal Length	L		0.125	0.175	0.225
Terminal-to-Exposed-Pad	K		0.20	-	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

8-Lead Plastic Super-Thin Dual Small Outline No-Lead (8X) - 1.5x1.5 mm Body [X2SON] With 1.2x0.7 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

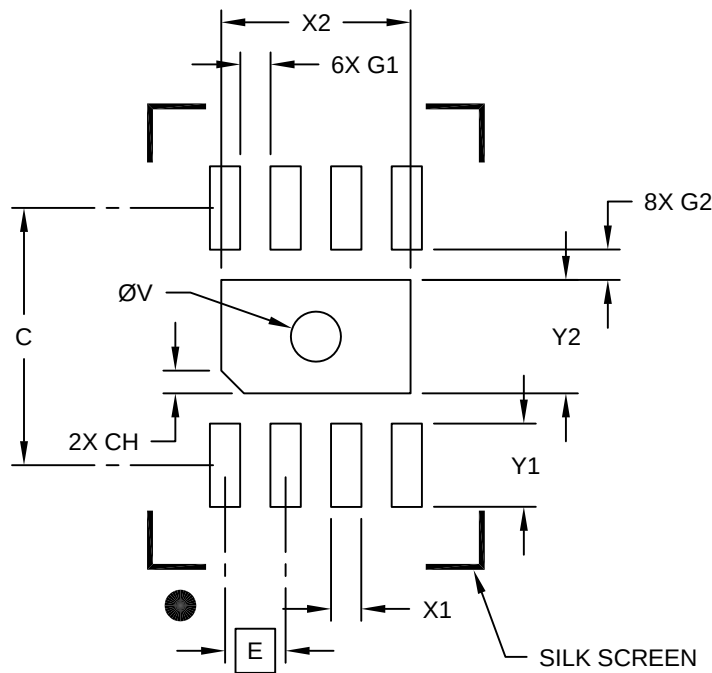

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.40 BSC		
Optional Center Pad Width	X2			1.25
Optional Center Pad Length	Y2			0.75
Optional Center Pad Chamfer (X2)	CH		0.15	
Contact Pad Spacing	C		1.70	
Contact Pad Width (X8)	X1			0.20
Contact Pad Length (X8)	Y1			0.55
Contact Pad to Pad (X6)	G1	0.20		
Contact Pad to Center Pad (X8)	G2	0.20		
Thermal Via Diameter	V		0.33	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process