



Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packages>



132-Lead Very Thin Plastic Quad Flat, No Lead Package (NX) - 10x10x0.9 mm Body [VQFN] Dual Row Terminals, Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

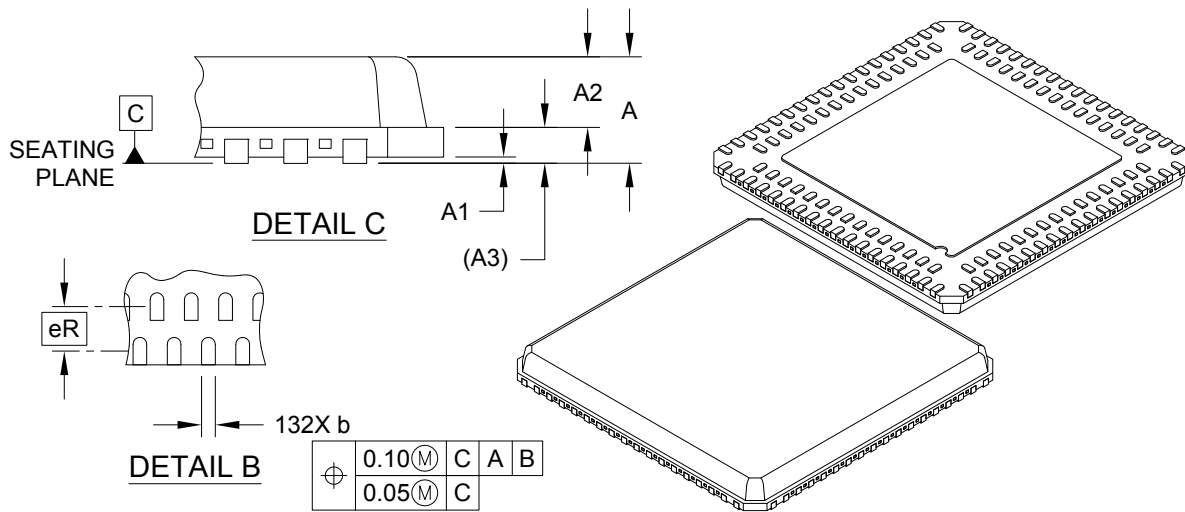


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	132		
Number of Terminals	NA	72		
Number of Terminals	NB	60		
Pitch	e	0.50 BSC		
Pitch Between Rows	eR	0.65 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Mold Cap Thickness	A2	0.55	0.60	0.65
Terminal Thickness	A3	0.25 REF		
Overall Length	D	10.00 BSC		
Mold Cap Length	D1	9.73 BSC		
Exposed Pad Length	D2	4.87	4.97	5.07
Overall Width	E	10.00 BSC		
Mold Cap Width	E1	9.73 BSC		
Exposed Pad Width	E2	4.87	4.97	5.07
Terminal Length	La	0.30	0.40	0.50
Terminal Length	Lb	0.30	0.40	0.50
Terminal Width	b	0.18	0.22	0.30
Terminal-to-Exposed-Pad	K	0.20	—	—
Corner Chamfer	P	0.24	0.42	0.60

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

132-Lead Very Thin Plastic Quad Flat, No Lead Package (NX) - 10x10x0.9 mm Body **[VQFN] Dual Row Terminals, Punch Singulated**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

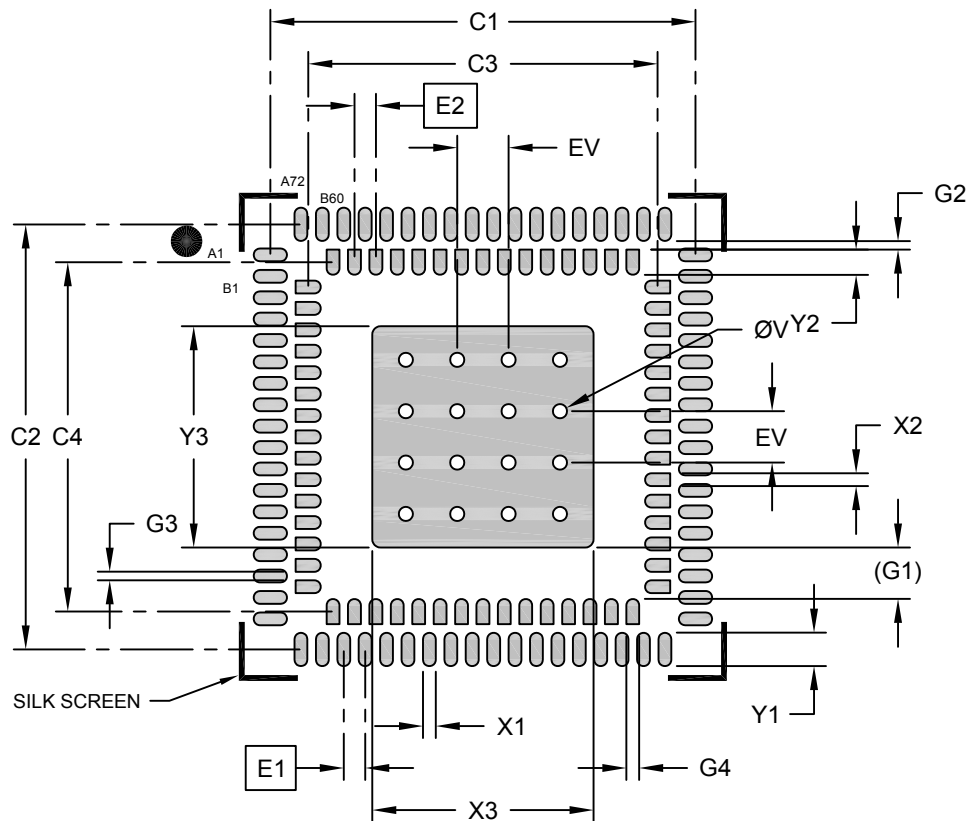


RECOMMENDED LAND PATTERN

Units		MILLIMETERS			Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX	Dimension Limits		MIN	NOM	MAX
Outer Contact Pitch	E1	0.50 BSC			Inner Contact Pad Spacing	C4	8.16		
Inner Contact Pitch	E2	0.50 BSC			Outer Contact Pad Length (X72)	Y1	0.78		
Outer Contact Pad Width (X72)	X1	0.30			Inner Contact Pad Length (X60)	Y2	0.59		
Inner Contact Pad Width (X60)	X2	0.30			Contact Pad to Center Pad (X60)	G1	1.20 REF		
Optional Center Pad Width	X3	5.17			Inner Pad Row to Outer Pad Row	G2	0.20		
Optional Center Pad Length	Y3	5.17			Contact Pad to Contact Pad (X68)	G3	0.20		
Outer Contact Pad Spacing	C1	9.93			Contact Pad to Contact Pad (X56)	G4	0.20		
Outer Contact Pad Spacing	C2	9.93			Thermal Via Diameter	V	0.33		
Inner Contact Pad Spacing	C3	8.16			Thermal Via Pitch	EV	1.20		

Notes:


- Dimensioning and tolerancing per ASME Y14.5M
 BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 REF: Reference Dimension. Provided for information only.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packages>



132-Lead Very Thin Plastic Quad Flat, No Lead Package (NXX) - 10x10x0.9 mm Body [VQFN] Dual Row Terminals, Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

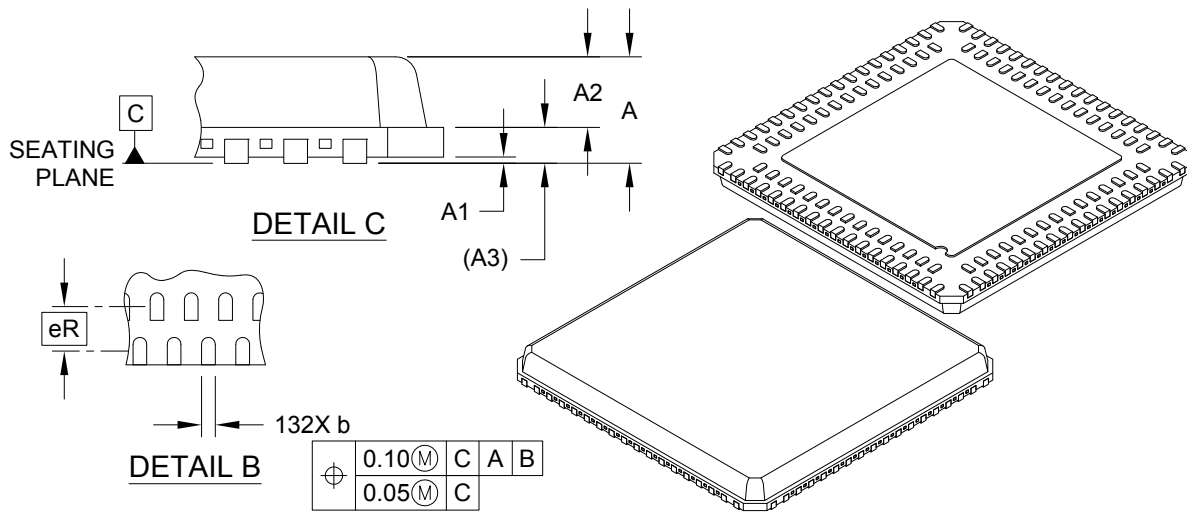


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	132		
Number of Terminals	NA	72		
Number of Terminals	NB	60		
Pitch	e	0.50 BSC		
Pitch Between Rows	eR	0.65 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Mold Cap Thickness	A2	0.55	0.60	0.65
Terminal Thickness	A3	0.25 REF		
Overall Length	D	10.00 BSC		
Mold Cap Length	D1	9.73 BSC		
Exposed Pad Length	D2	4.87	4.97	5.07
Overall Width	E	10.00 BSC		
Mold Cap Width	E1	9.73 BSC		
Exposed Pad Width	E2	4.87	4.97	5.07
Terminal Length	La	0.30	0.40	0.50
Terminal Length	Lb	0.30	0.40	0.50
Terminal Width	b	0.18	0.22	0.30
Terminal-to-Exposed-Pad	K	0.20	—	—
Corner Chamfer	P	0.24	0.42	0.60

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

132-Lead Very Thin Plastic Quad Flat, No Lead Package (NXX) - 10x10x0.9 mm Body [VQFN] Dual Row Terminals, Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

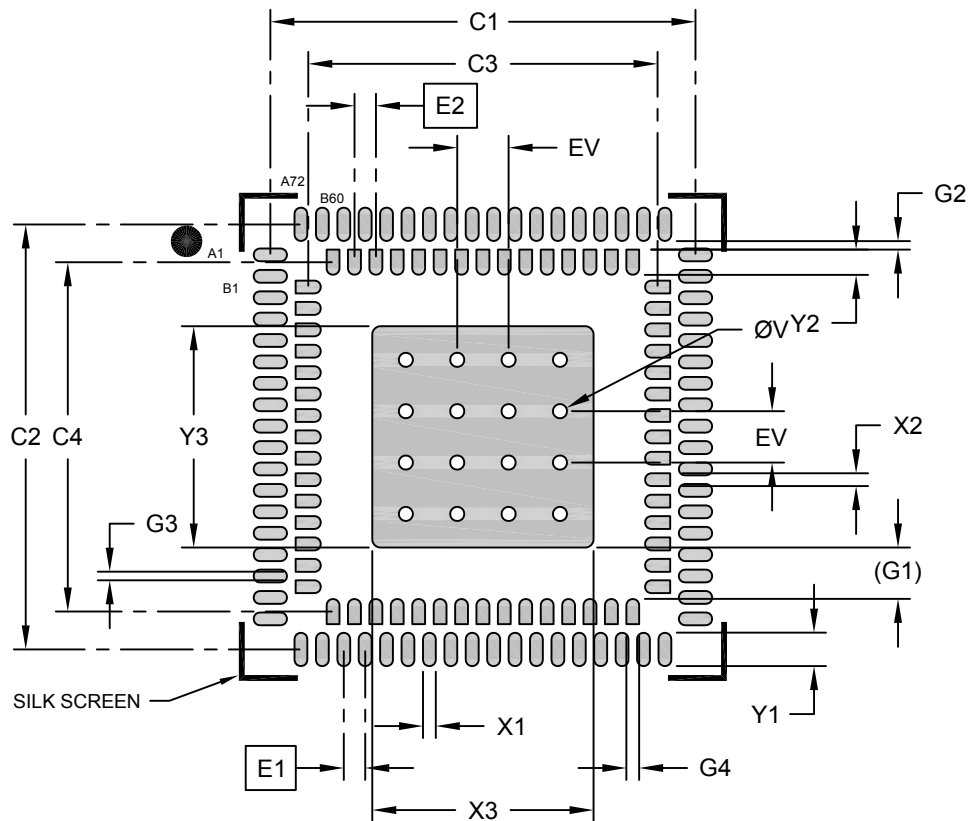

RECOMMENDED LAND PATTERN

Units		MILLIMETERS			Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX	Dimension Limits		MIN	NOM	MAX
Outer Contact Pitch	E1	0.50 BSC			Inner Contact Pad Spacing	C4		8.16	
Inner Contact Pitch	E2	0.50 BSC			Outer Contact Pad Length (X72)	Y1			0.78
Outer Contact Pad Width (X72)	X1			0.30	Inner Contact Pad Length (X60)	Y2			0.59
Inner Contact Pad Width (X60)	X2			0.30	Contact Pad to Center Pad (X60)	G1	1.20 REF		
Optional Center Pad Width	X3			5.17	Inner Pad Row to Outer Pad Row	G2	0.20		
Optional Center Pad Length	Y3			5.17	Contact Pad to Contact Pad (X68)	G3	0.20		
Outer Contact Pad Spacing	C1		9.93		Contact Pad to Contact Pad (X56)	G4	0.20		
Outer Contact Pad Spacing	C2		9.93		Thermal Via Diameter	V		0.33	
Inner Contact Pad Spacing	C3		8.16		Thermal Via Pitch	EV		1.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension. Provided for information only.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process