



256-Ball Low Profile Fine Pitch Ball Grid Array (3J) - 14x14 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

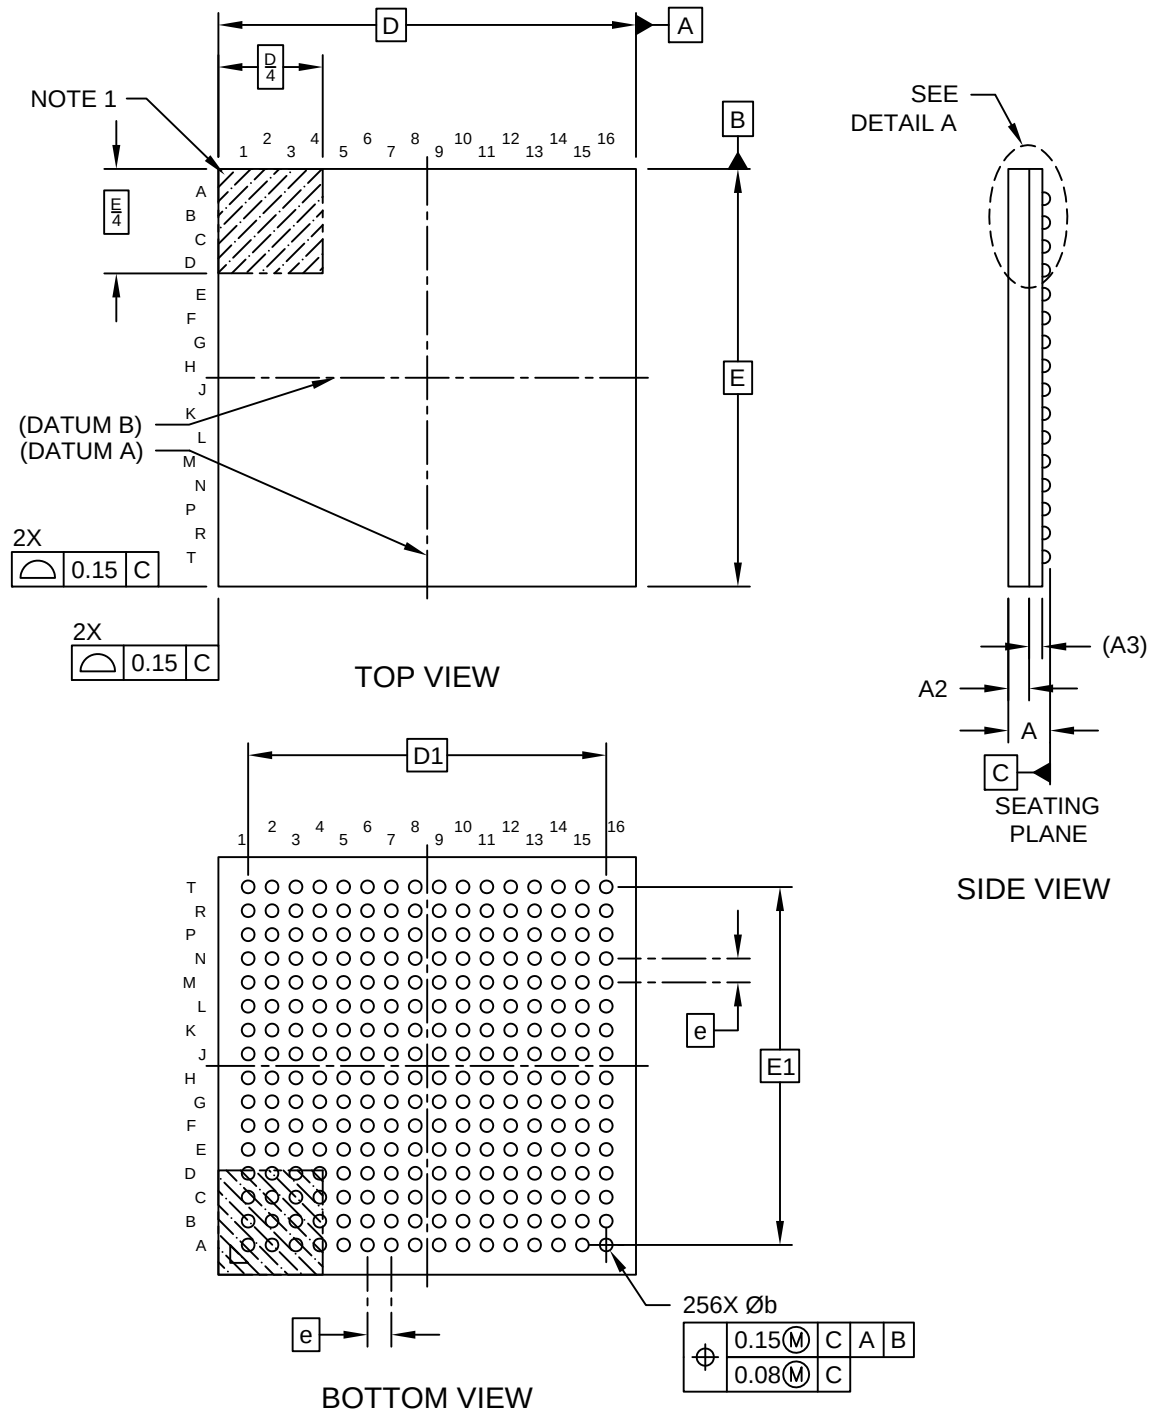

256-Ball Low Profile Fine Pitch Ball Grid Array (3J) - 14x14 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

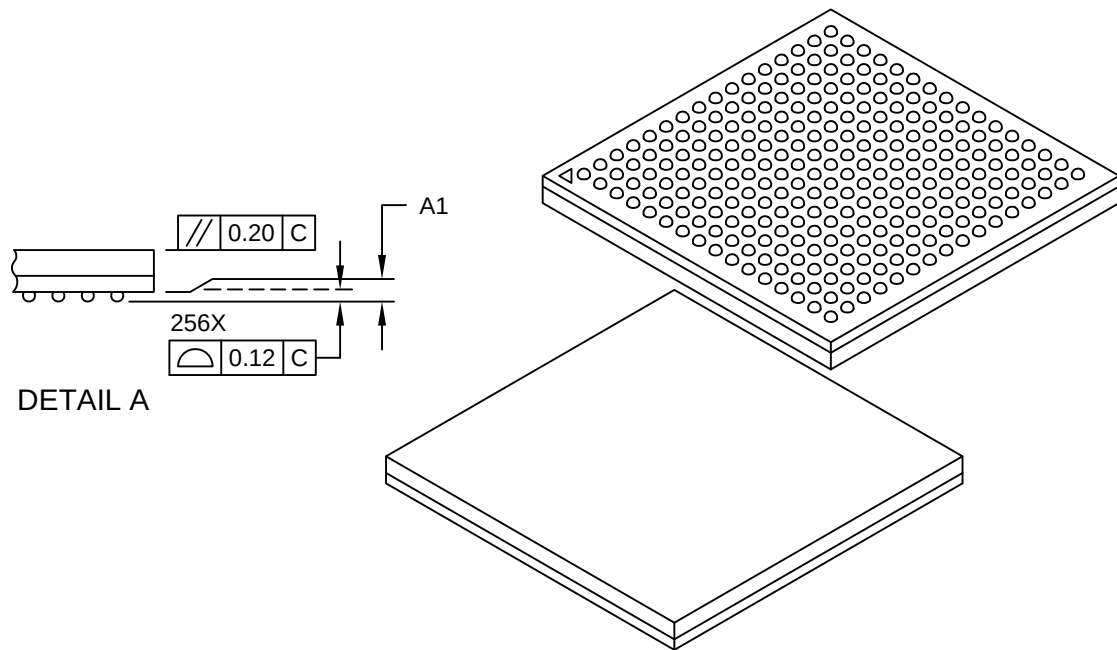


Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Number of Terminals	N	256		
Pitch	e	0.80 BSC		
Overall Height	A	-	-	1.40
Standoff	A1	0.27	0.32	0.37
Mold Thickness	A2	0.70 REF		
Substrate Thickness	A3	0.26 REF		
Overall Length	D	14.00 BSC		
Overall Terminal Spacing	D1	12.00 BSC		
Overall Width	E	14.00 BSC		
Overall Terminal Spacing	E1	12.00 BSC		
Terminal Diameter	b	0.38	0.43	0.48

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

256-Ball Low Profile Fine Pitch Ball Grid Array (3J) - 14x14 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

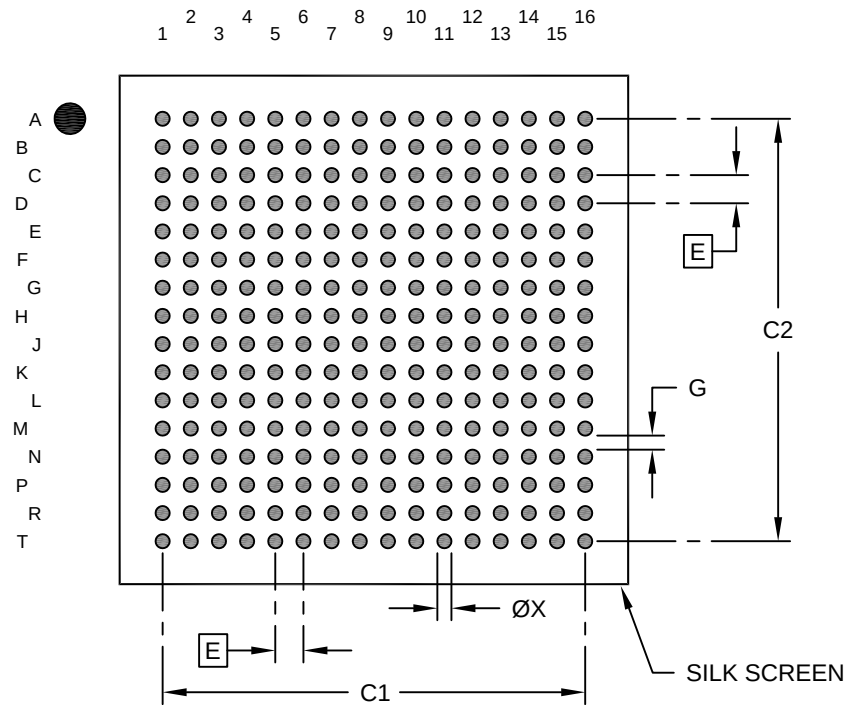

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Overall Contact Pad Spacing	C1		12.00	
Overall Contact Pad Spacing	C2		12.00	
Contact Pad Width (X256)	X1			0.43
Contact Pad to Contact Pad	G	0.40		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.