



**56L Very Thin Quad Flat, No Lead Package (RT) - 8x8 mm Body [VQFN]
With 5.9x5.9 mm Exposed Pad; Punch Singulated**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

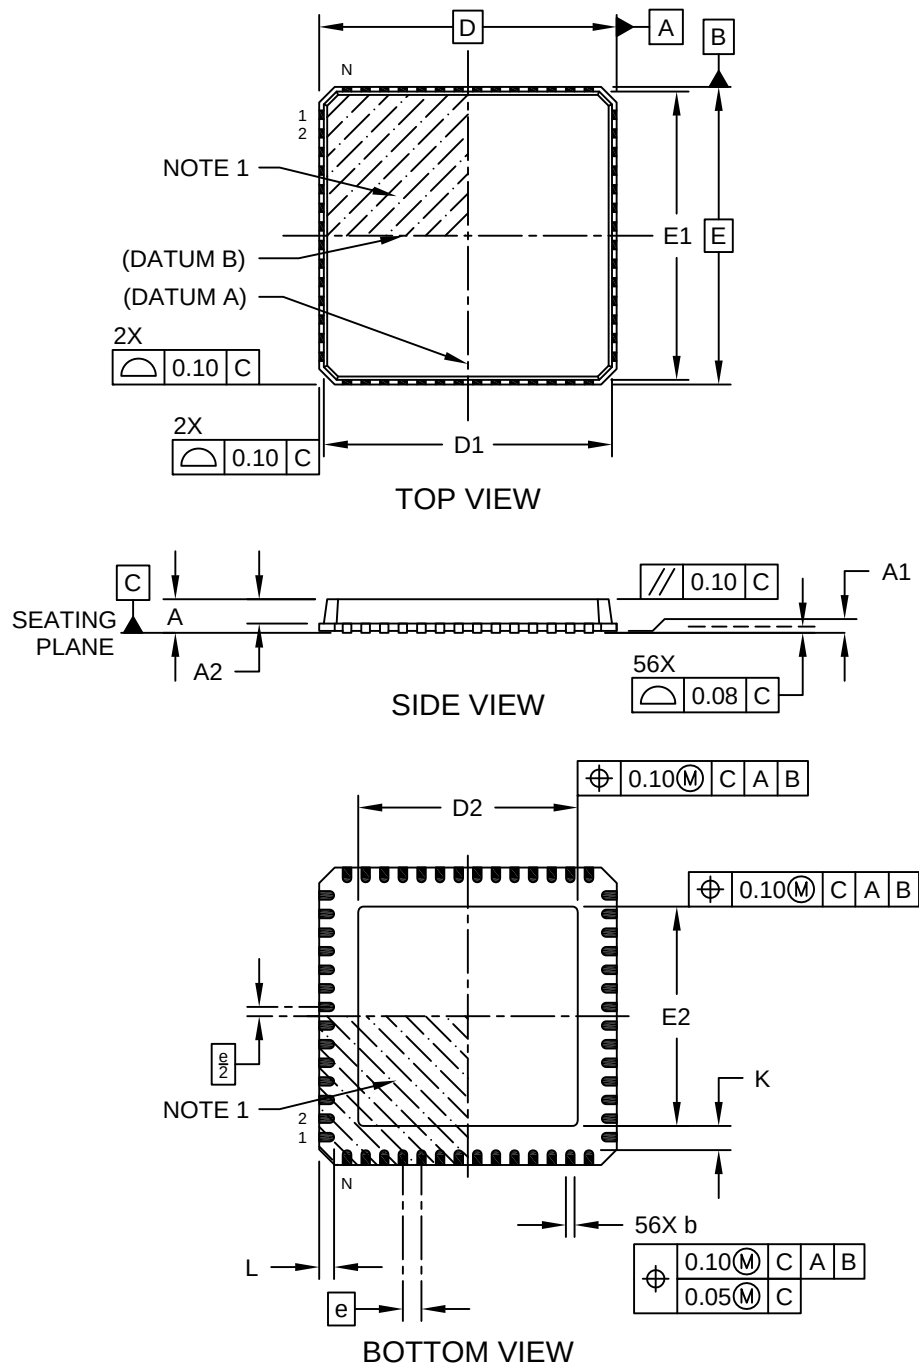

**56L Very Thin Quad Flat, No Lead Package (RT) - 8x8 mm Body [VQFN]
With 5.9x5.9 mm Exposed Pad; Punch Singulated**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

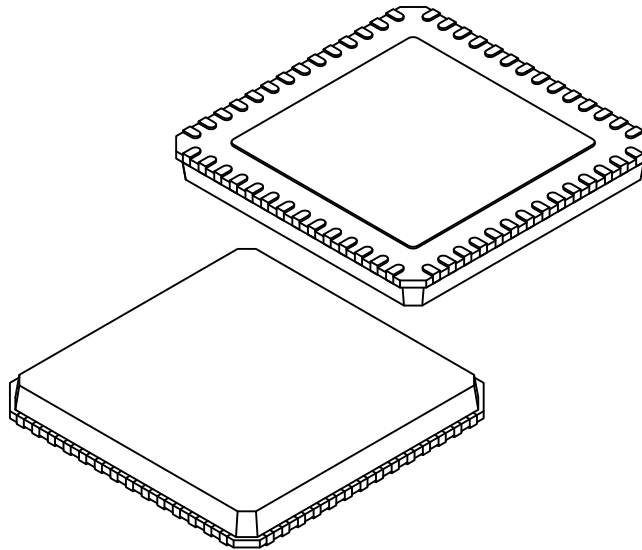

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		56		
Pitch	e		0.50 BSC		
Overall Height	A		0.70	0.85	1.00
Standoff	A1		0.00	0.02	0.05
Mold Cap Thickness	A2		-	-	0.90
Overall Length	D		8.00 BSC		
Molded Top Length	D1		7.65	7.75	7.85
Exposed Pad Length	D2		5.80	5.90	6.00
Overall Width	E		8.00 BSC		
Molded Top Width	E1		7.65	7.75	7.85
Exposed Pad Width	E2		5.80	5.90	6.00
Terminal Width	b		0.18	0.23	0.30
Terminal Length	L		0.30	0.40	0.50
Terminal-to-Exposed-Pad	K		0.20	-	-

Notes:


1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is punch singulated
3. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

**56L Very Thin Quad Flat, No Lead Package (RT) - 8x8 mm Body [VQFN]
With 5.9x5.9 mm Exposed Pad; Punch Singulated**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

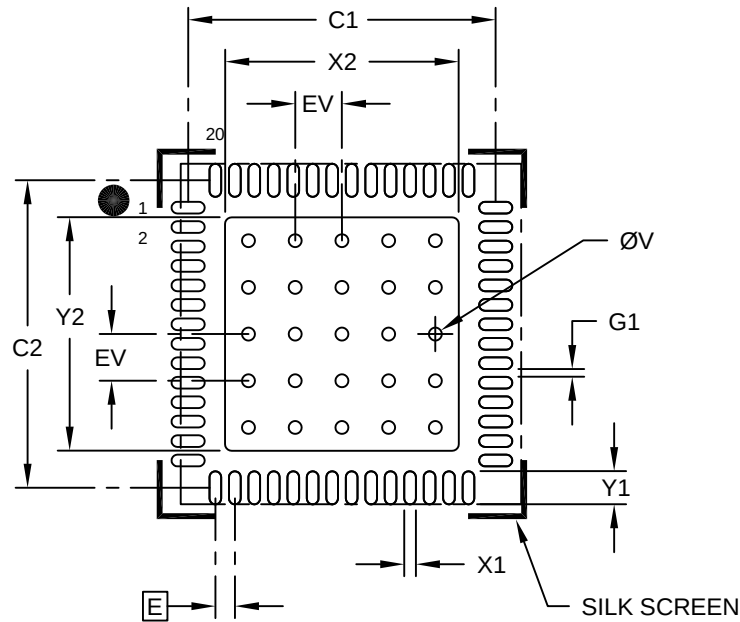

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			5.90
Optional Center Pad Length	Y2			5.90
Contact Pad Spacing	C1		7.90	
Contact Pad Spacing	C2		7.90	
Contact Pad Width (X56)	X1			0.28
Contact Pad Length (X56)	Y1			0.69
Contact Pad to Center Pad (X52)	G1	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process