


Packaging Diagrams and Parameters

5L Plastic Small Outline Transistor Package (5A) - [SOT-25]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

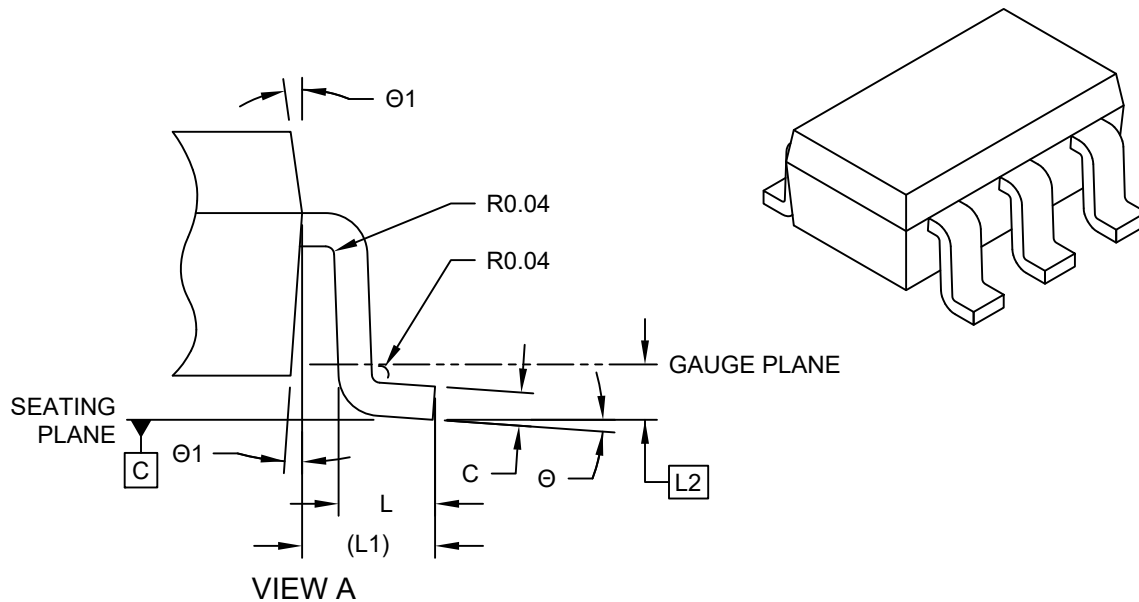

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Pins	N		5		
Pitch	e		0.95 BSC		
Overall Pitch	e1		1.90 BSC		
Overall Height	A		-	-	1.30
Standoff	A1		0.20	-	-
Molded Package Height	A2		1.00	1.10	1.20
Molded Package Length	D		2.90 BSC		
Overall Width	E		2.80 BSC		
Molded Package Width	E1		1.50	1.60	1.80
Foot Length	L		0.20	-	-
Footprint	(L1)		0.61 REF		
Seating Plane to Gauge Plane	L2		0.25 BSC		
Lead Width	b		0.35	0.40	0.50
Lead Thickness	c		0.10	0.15	0.25
Foot Angle	Θ		0°	4°	8°
Mold Draft Angle	Θ1		5°	10°	15°


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area if used.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

5L Plastic Small Outline Transistor Package (5A) - [SOT-25]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

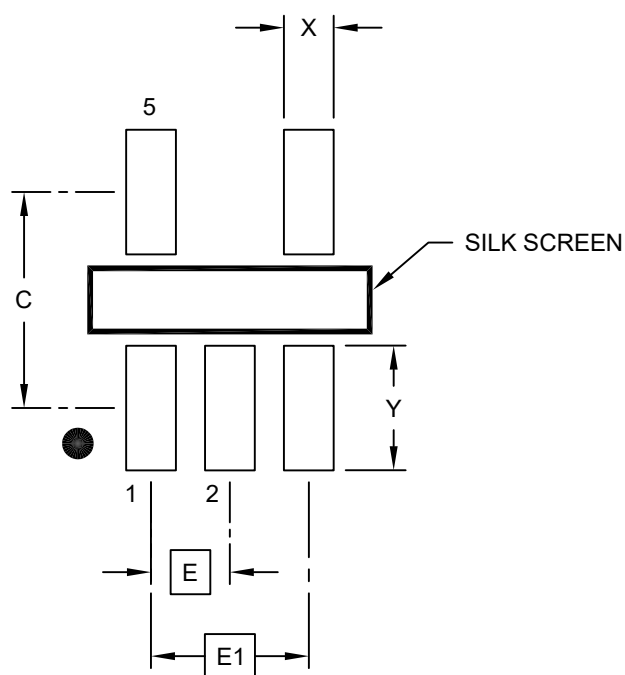

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.95 BSC		
Overall Pitch	E1	1.90 BSC		
Contact Width	X		0.60	
Contact Pad Length	Y		1.05	
Contact Pad Spacing	C		2.60	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.