



**20-Lead Plastic Quad Flat, No Lead Package (6N) - 4x4x1.0 mm Body [VQFN]  
Wettable Flanks (Stepped), 0.40 mm Terminal Length**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

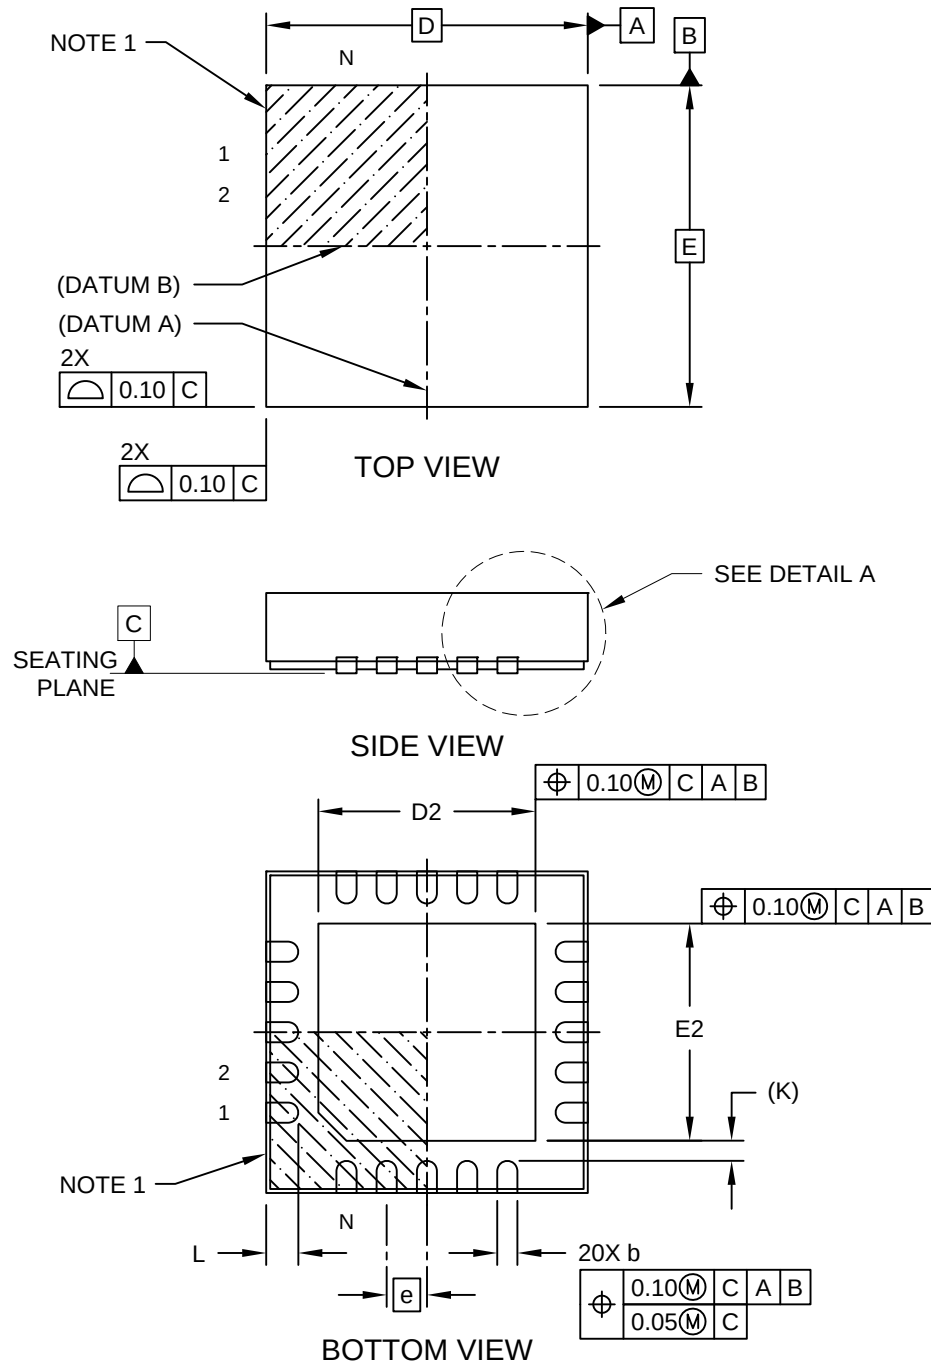

**20-Lead Plastic Quad Flat, No Lead Package (6N) - 4x4x1.0 mm Body [VQFN]  
Wettable Flanks (Stepped), 0.40 mm Terminal Length**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

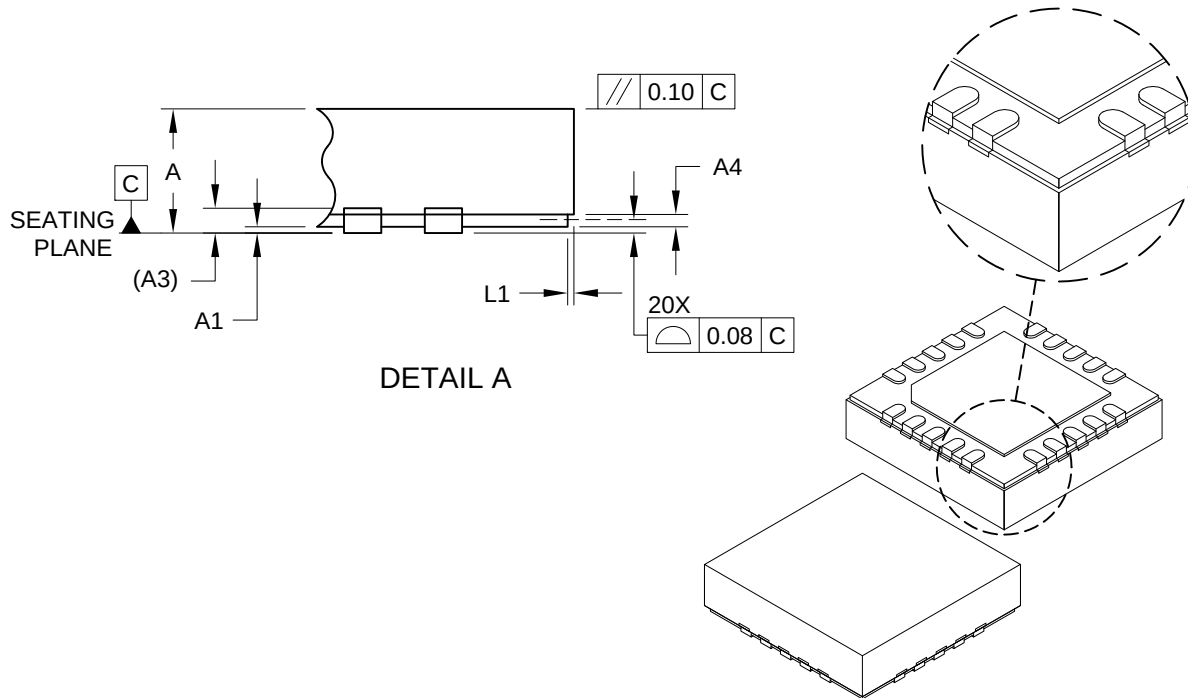

| Units                   |    | MILLIMETERS |       |       |
|-------------------------|----|-------------|-------|-------|
| Dimension Limits        |    | MIN         | NOM   | MAX   |
| Number of Terminals     | N  | 20          |       |       |
| Pitch                   | e  | 0.50 BSC    |       |       |
| Overall Height          | A  | 0.80        | 0.90  | 1.00  |
| Standoff                | A1 | 0.00        | 0.02  | 0.05  |
| Terminal Thickness      | A3 | 0.20 REF    |       |       |
| Step Height             | A4 | 0.05        | 0.12  | 0.19  |
| Overall Width           | E  | 4.00 BSC    |       |       |
| Exposed Pad Width       | E2 | 2.60        | 2.70  | 2.80  |
| Overall Length          | D  | 4.00 BSC    |       |       |
| Exposed Pad Length      | D2 | 2.60        | 2.70  | 2.80  |
| Terminal Width          | b  | 0.20        | 0.25  | 0.30  |
| Terminal Length         | L  | 0.30        | 0.40  | 0.50  |
| Step Length             | L1 | 0.035       | 0.060 | 0.085 |
| Terminal-to-Exposed Pad | K  | 0.25 REF    |       |       |

Notes:


1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

## 20-Lead Plastic Quad Flat, No Lead Package (6N) - 4x4x1.0 mm Body [VQFN] Wettable Flanks (Stepped), 0.40 mm Terminal Length

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

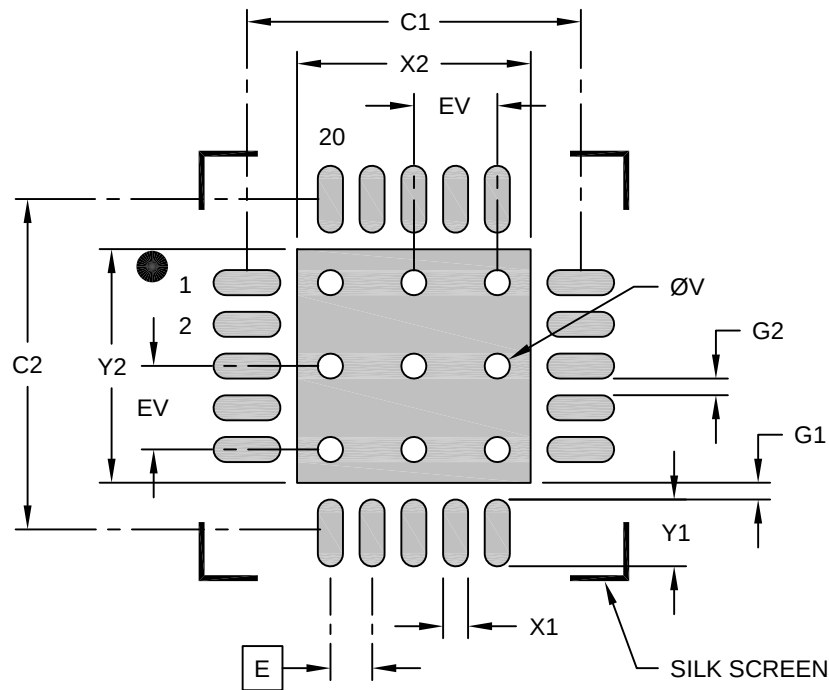

### RECOMMENDED LAND PATTERN

| Dimension Limits                 | Units | MILLIMETERS |      |      |
|----------------------------------|-------|-------------|------|------|
|                                  |       | MIN         | NOM  | MAX  |
| Contact Pitch                    | E     | 0.50 BSC    |      |      |
| Optional Center Pad Width        | X2    |             |      | 2.80 |
| Optional Center Pad Length       | Y2    |             |      | 2.80 |
| Contact Pad Spacing              | C1    |             | 4.00 |      |
| Contact Pad Spacing              | C2    |             | 4.00 |      |
| Contact Pad Width (X20)          | X1    |             |      | 0.30 |
| Contact Pad Length (X20)         | Y1    |             |      | 0.80 |
| Contact Pad to Center Pad (X20)  | G1    | 0.25        |      |      |
| Contact Pad to Contact Pad (X16) | G2    | 0.20        |      |      |
| Thermal Via Diameter             | V     |             | 0.30 |      |
| Thermal Via Pitch                | EV    |             | 1.00 |      |

#### Notes:

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process