



64-Ball Very, Very Thin Fine Pitch Ball Grid Array (7U) - 6x6 mm Body [WFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

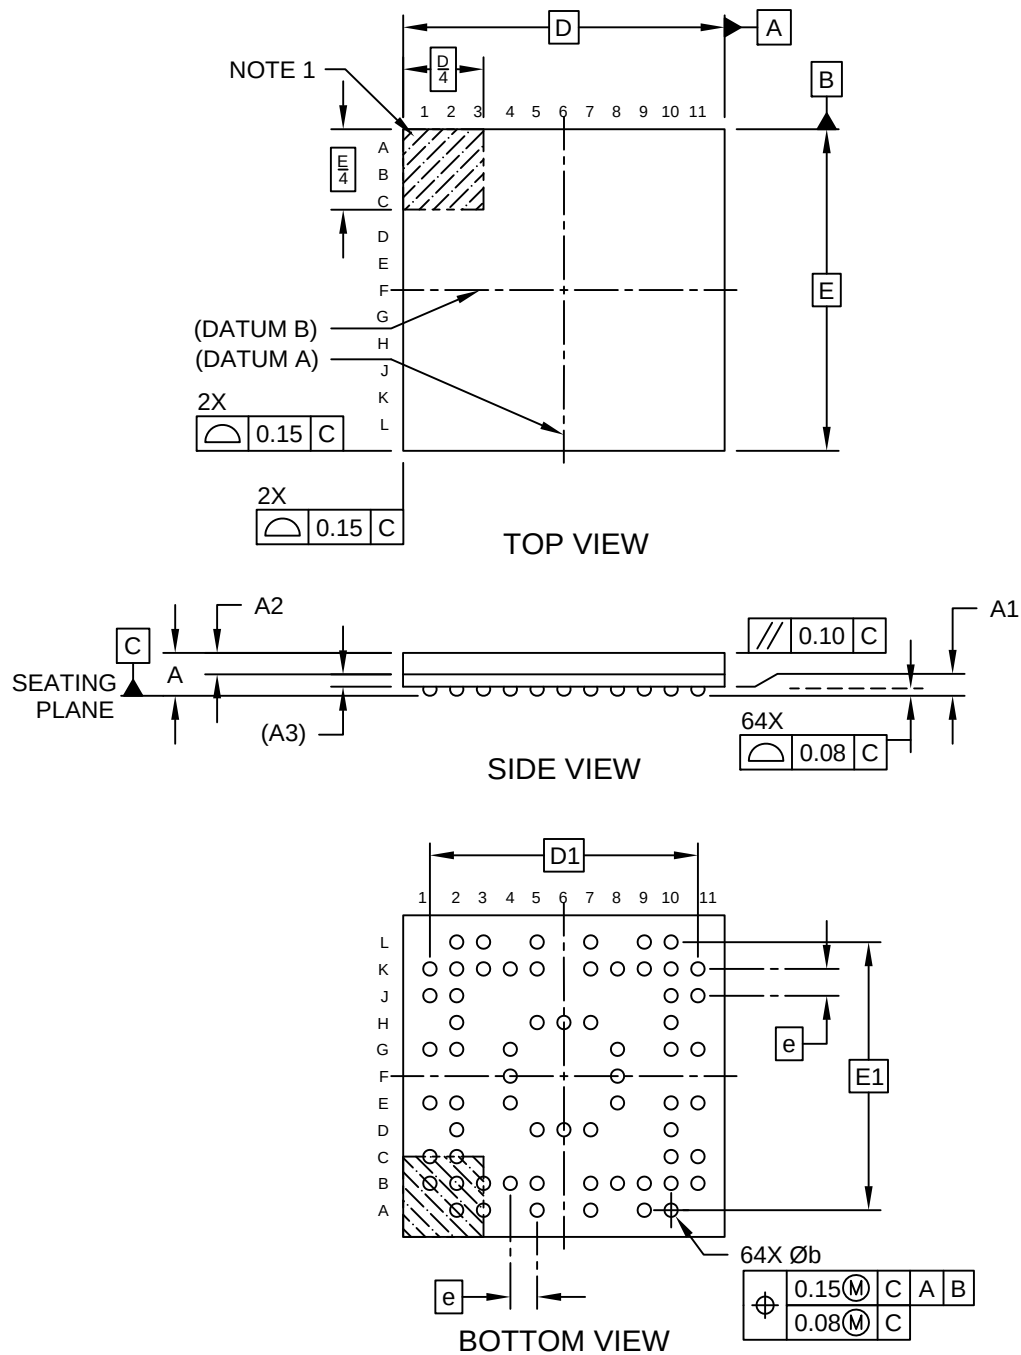

64-Ball Very, Very Thin Fine Pitch Ball Grid Array (7U) - 6x6 mm Body [WFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

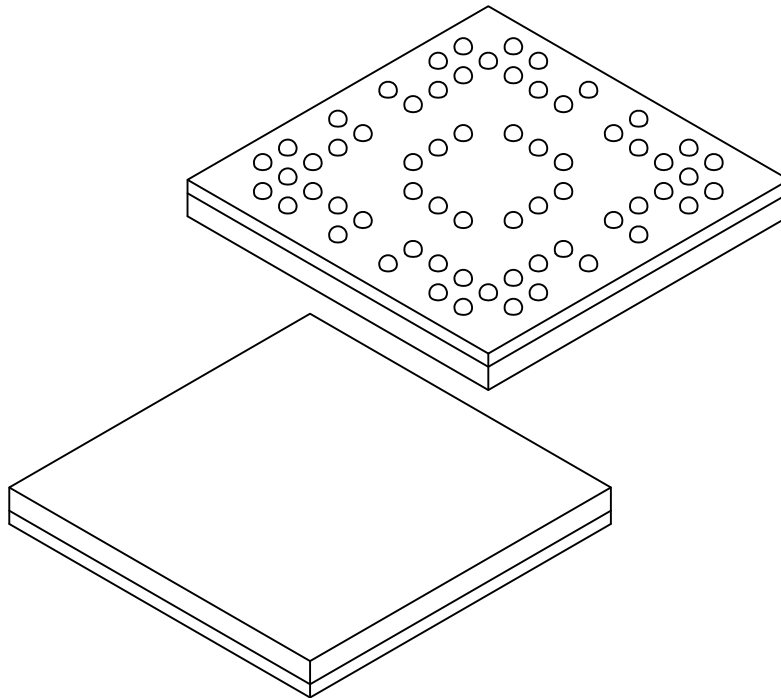


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	64		
Pitch	e	0.50 BSC		
Overall Height	A	-	-	0.80
Standoff	A1	0.12	0.17	-
Mold Thickness	A2	0.35	0.40	0.45
Substrate Thickness	A3	0.26 REF		
Overall Length	D	6.00 BSC		
Overall Terminal Spacing	D1	5.00 BSC		
Overall Width	E	6.00 BSC		
Overall Terminal Spacing	E1	5.00 BSC		
Terminal Diameter	b	0.20	0.25	0.30

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

64-Ball Very, Very Thin Fine Pitch Ball Grid Array (7U) - 6x6 mm Body [WFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

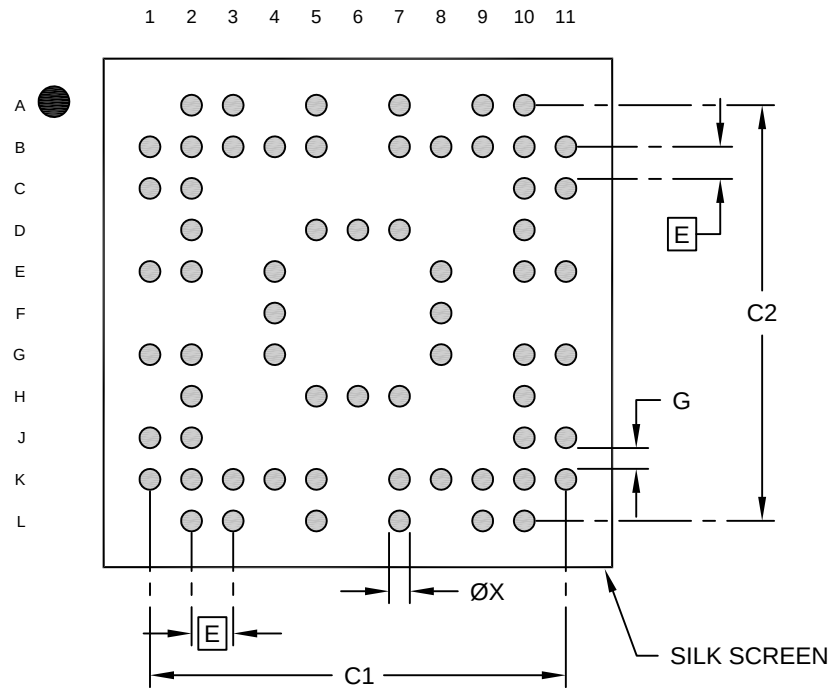

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Overall Contact Pad Spacing	C1		5.00	
Overall Contact Pad Spacing	C2		5.00	
Contact Pad Width (X64)	X1			0.20
Contact Pad to Contact Pad	G	0.25		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.