



8-Lead Very Thin Plastic Dual Flat, No Lead (9U) - 6x5 mm Body [VDFN] With Dual Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

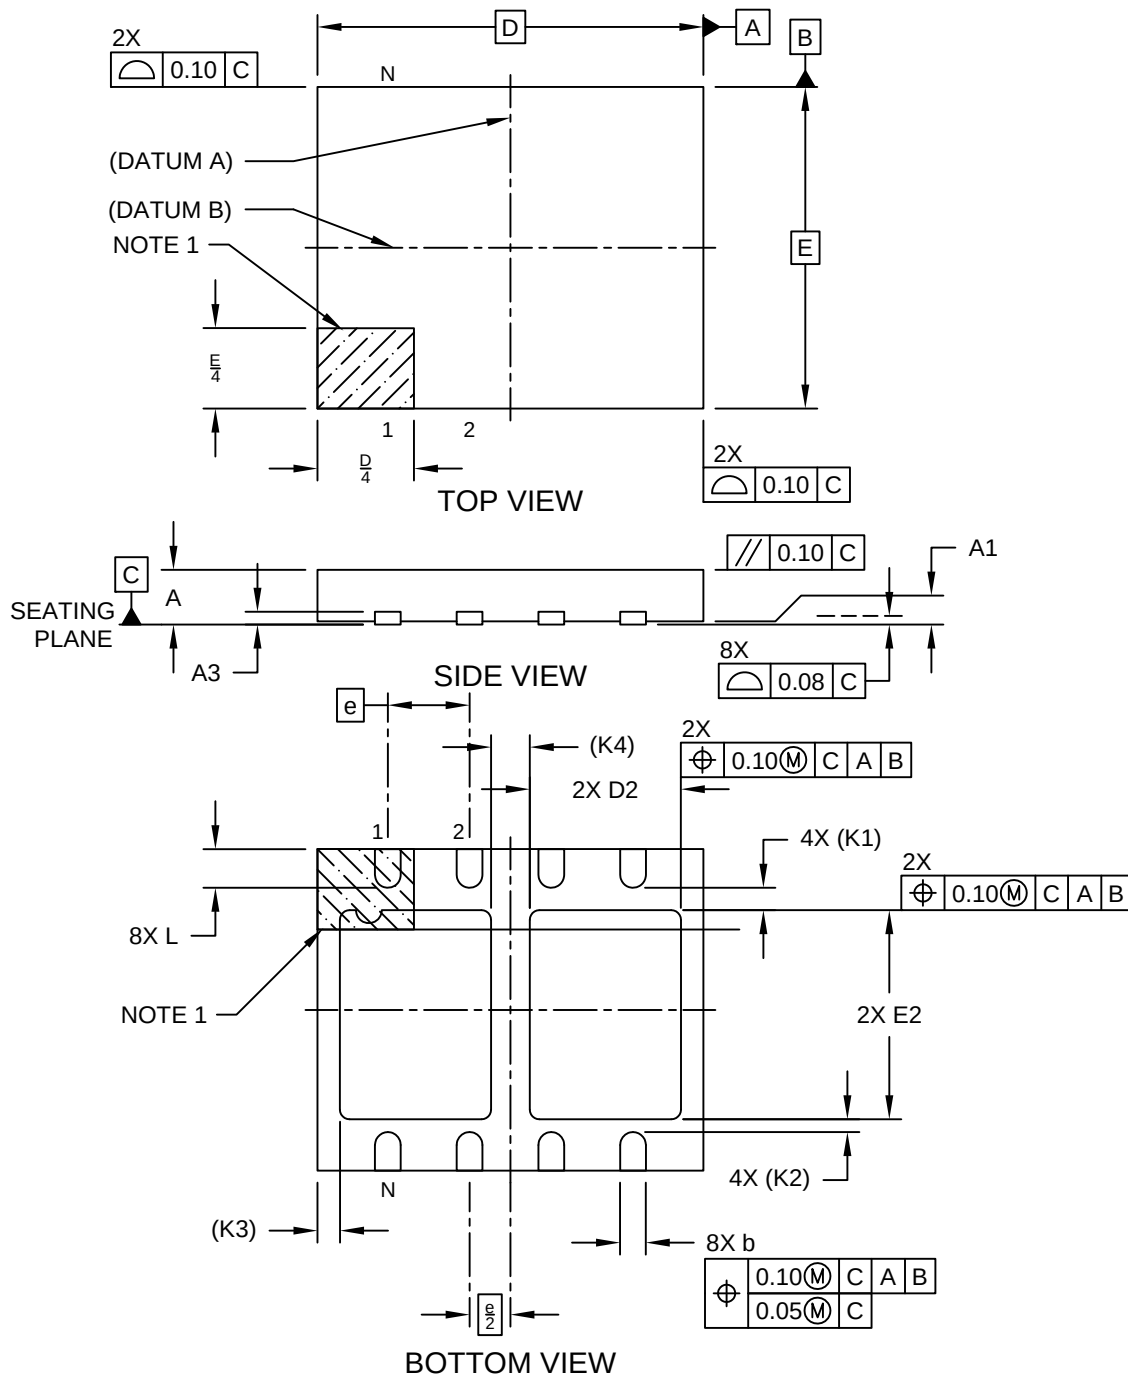

8-Lead Very Thin Plastic Dual Flat, No Lead (9U) - 6x5 mm Body [VDFN] With Dual Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

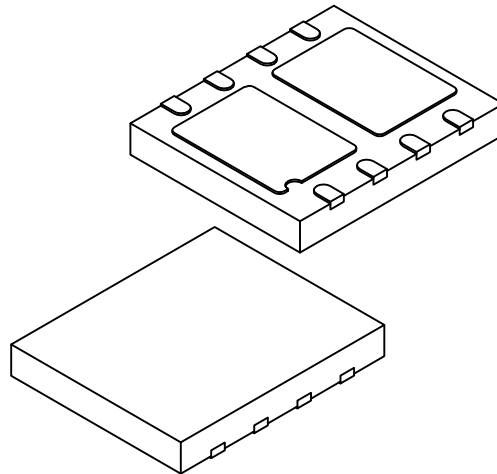

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	8		
Pitch	e	1.27 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.20 REF		
Overall Length	D	6.00 BSC		
Exposed Pad Length (X2)	D2	2.25	2.35	2.45
Overall Width	E	5.00 BSC		
Exposed Pad Width (X2)	E2	3.15	3.25	3.35
Terminal Width	b	0.35	0.40	0.45
Terminal Length	L	0.55	0.60	0.65
Terminal to Exposed Pad (X4)	K1	0.35 REF		
Terminal to Exposed Pad (X4)	K2	0.20 REF		
Molded Package Edge to Exposed Pad	K3	0.35 REF		
Exposed Pad to Exposed Pad	K4	0.60 REF		

Notes:


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

8-Lead Very Thin Plastic Dual Flat, No Lead (9U) - 6x5 mm Body [VDFN] With Dual Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

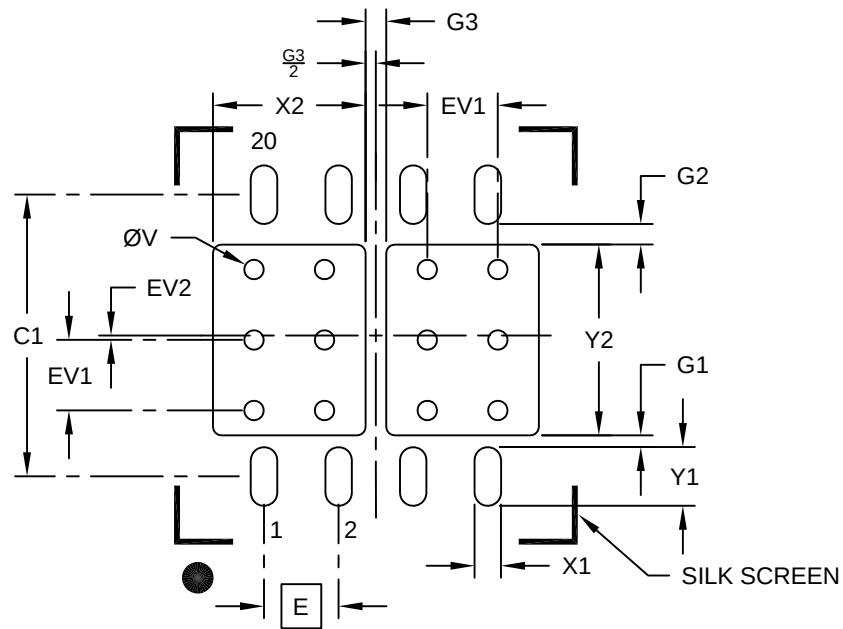

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.27 BSC		
Optional Center Pad Width (X2)	X2			2.60
Optional Center Pad Length	Y2			3.25
Contact Pad Spacing	C1		4.80	
Contact Pad Width (X8)	X1			0.45
Contact Pad Length (X8)	Y1			0.80
Contact Pad to Center Pad (X4)	G1	0.20		
Contact Pad to Center Pad (X4)	G2	0.35		
Center Pad to Center Pad	G3		0.35	
Thermal Via Diameter (X12)	V		0.33	
Thermal Via Pitch	EV1		1.20	
Thermal Via Offset	EV2		0.08	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process