



### 36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (SCX) - 5x5 mm Body [UQFN] With Corner Anchors

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

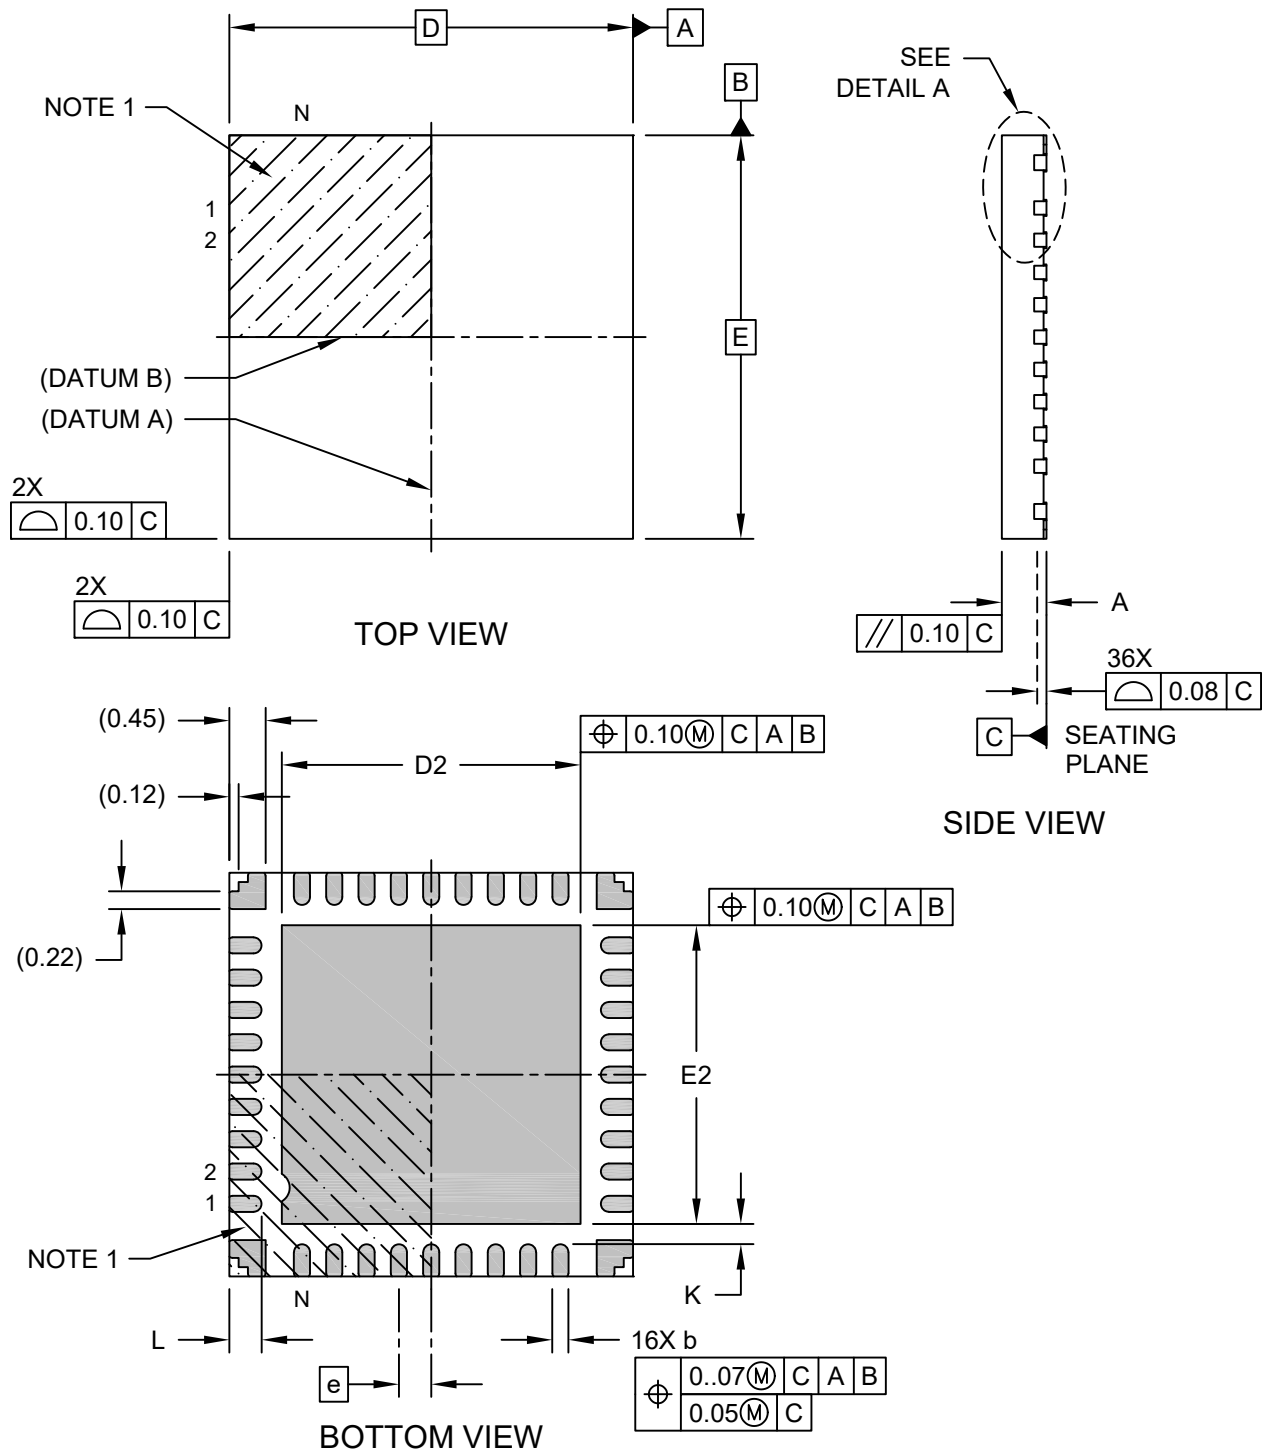

### 36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (SCX) - 5x5 mm Body [UQFN] With Corner Anchors

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

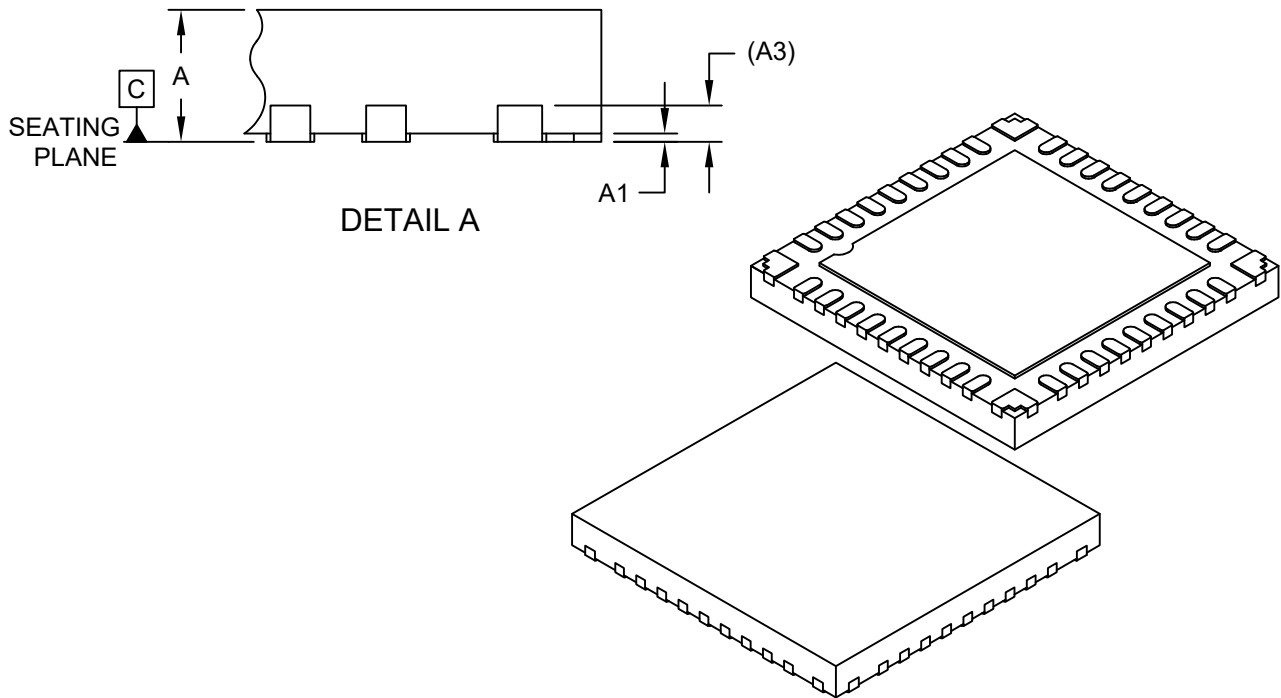

| Units                   |    | MILLIMETERS |      |      |
|-------------------------|----|-------------|------|------|
| Dimension Limits        |    | MIN         | NOM  | MAX  |
| Number of Terminals     | N  | 36          |      |      |
| Pitch                   | e  | 0.40 BSC    |      |      |
| Overall Height          | A  | 0.50        | 0.55 | 0.60 |
| Standoff                | A1 | 0.00        | 0.02 | 0.05 |
| Terminal Thickness      | A3 | 0.152 REF   |      |      |
| Overall Length          | D  | 5.00 BSC    |      |      |
| Exposed Pad Length      | D2 | 3.60        | 3.70 | 3.80 |
| Overall Width           | E  | 5.00 BSC    |      |      |
| Exposed Pad Width       | E2 | 3.60        | 3.70 | 3.80 |
| Terminal Width          | b  | 0.15        | 0.20 | 0.25 |
| Terminal Length         | L  | 0.30        | 0.40 | 0.50 |
| Terminal-to-Exposed-Pad | K  | 0.25 REF    |      |      |

**Notes:**


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

### 36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (SCX) - 5x5 mm Body [UQFN] With Corner Anchors

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

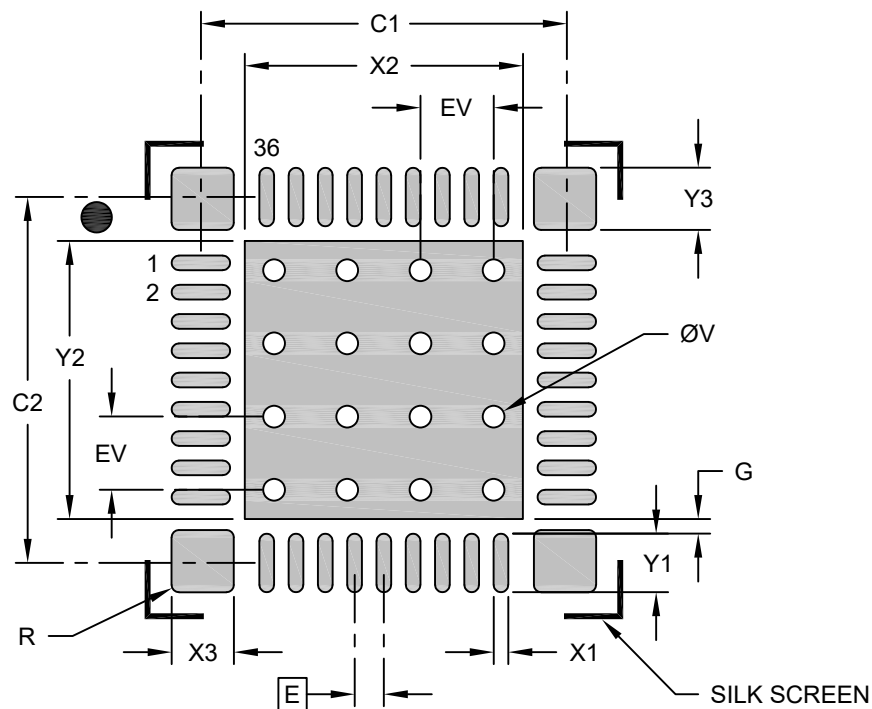

#### RECOMMENDED LAND PATTERN

| Units                           |    | MILLIMETERS |      |      |
|---------------------------------|----|-------------|------|------|
| Dimension Limits                |    | MIN         | NOM  | MAX  |
| Contact Pitch                   | E  | 0.40 BSC    |      |      |
| Center Pad Width                | X2 |             |      | 3.80 |
| Center Pad Length               | Y2 |             |      | 3.80 |
| Contact Pad Spacing             | C1 |             | 5.00 |      |
| Contact Pad Spacing             | C2 |             | 5.00 |      |
| Contact Pad Width (X36)         | X1 |             |      | 0.20 |
| Contact Pad Length (X36)        | Y1 |             |      | 0.80 |
| Corner Pad Width (X4)           | X3 |             |      | 0.85 |
| Corner Pad Length (X4)          | Y3 |             |      | 0.85 |
| Corner Pad Radius               | R  |             | 0.10 |      |
| Contact Pad to Center Pad (X36) | G  | 0.20        |      |      |
| Thermal Via Diameter            | V  |             | 0.30 |      |
| Thermal Via Pitch               | EV |             | 1.00 |      |

**Notes:**


1. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2436-SCX Rev D

### 36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M5) - 5x5 mm Body [UQFN]


#### With Corner Anchors

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

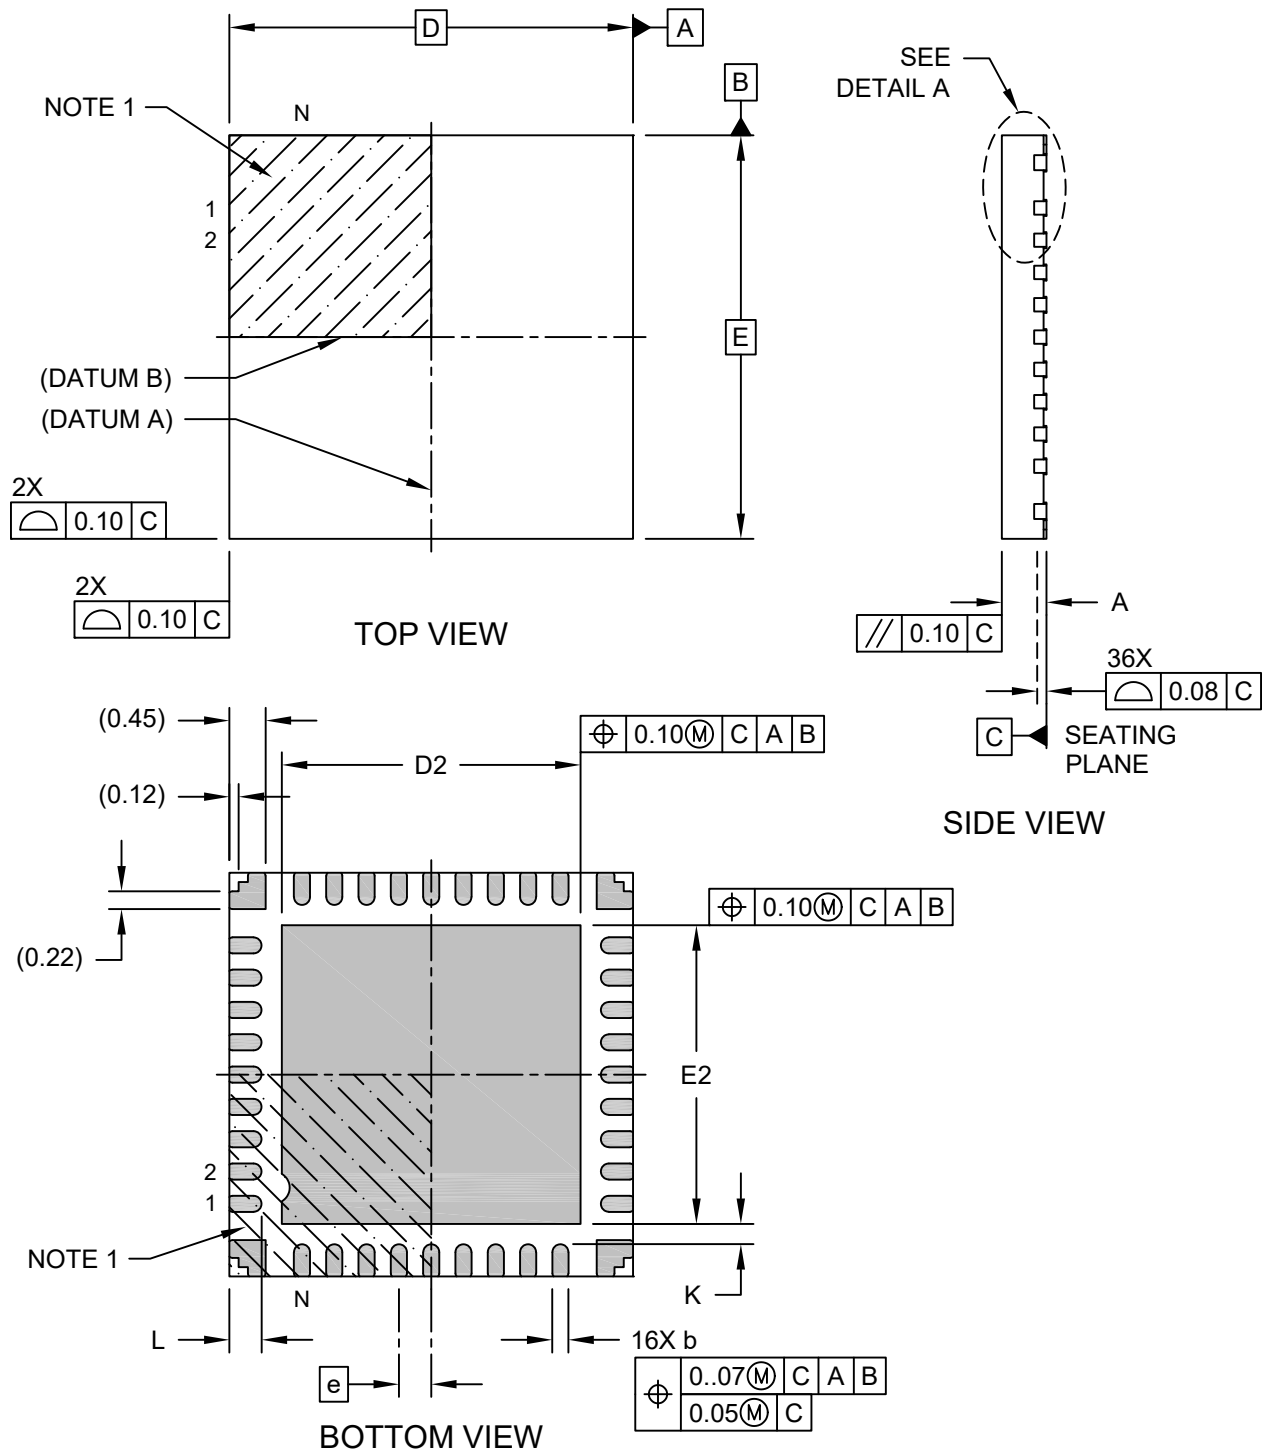

### 36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M5) - 5x5 mm Body [UQFN] With Corner Anchors

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

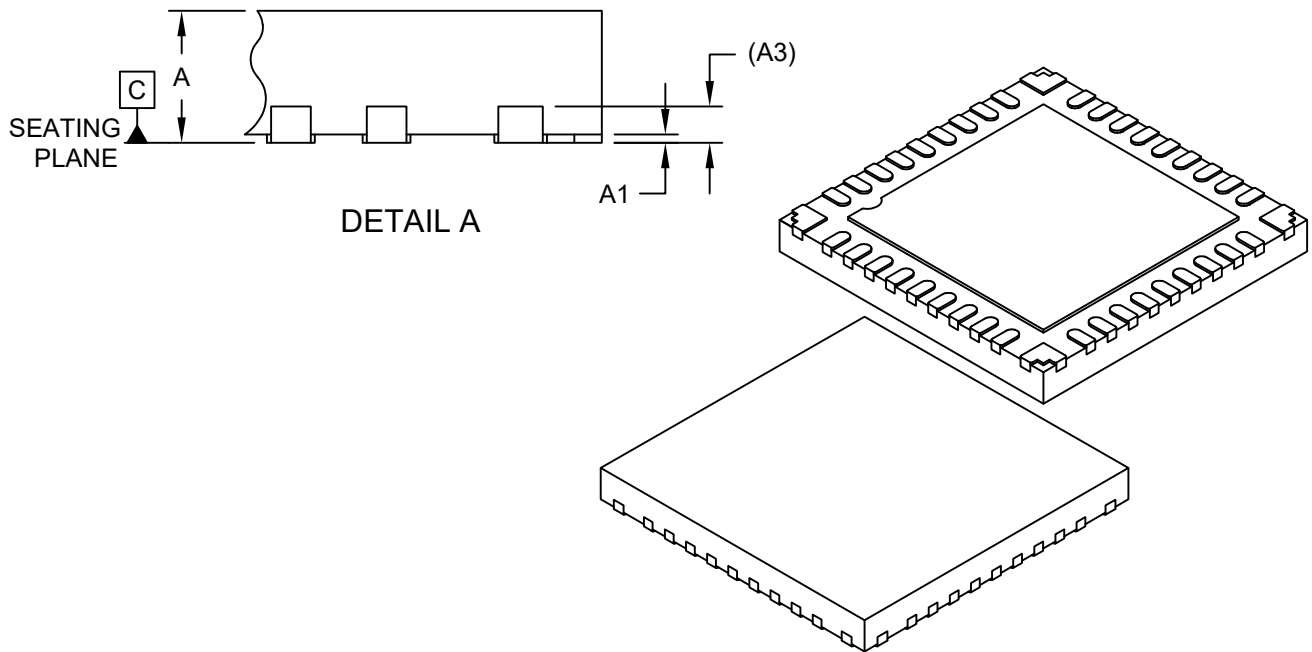

| Units                   |    | MILLIMETERS |      |      |
|-------------------------|----|-------------|------|------|
| Dimension Limits        |    | MIN         | NOM  | MAX  |
| Number of Terminals     | N  | 36          |      |      |
| Pitch                   | e  | 0.40 BSC    |      |      |
| Overall Height          | A  | 0.50        | 0.55 | 0.60 |
| Standoff                | A1 | 0.00        | 0.02 | 0.05 |
| Terminal Thickness      | A3 | 0.152 REF   |      |      |
| Overall Length          | D  | 5.00 BSC    |      |      |
| Exposed Pad Length      | D2 | 3.60        | 3.70 | 3.80 |
| Overall Width           | E  | 5.00 BSC    |      |      |
| Exposed Pad Width       | E2 | 3.60        | 3.70 | 3.80 |
| Terminal Width          | b  | 0.15        | 0.20 | 0.25 |
| Terminal Length         | L  | 0.30        | 0.40 | 0.50 |
| Terminal-to-Exposed-Pad | K  | 0.25 REF    |      |      |

**Notes:**


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

### 36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M5) - 5x5 mm Body [UQFN] With Corner Anchors

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

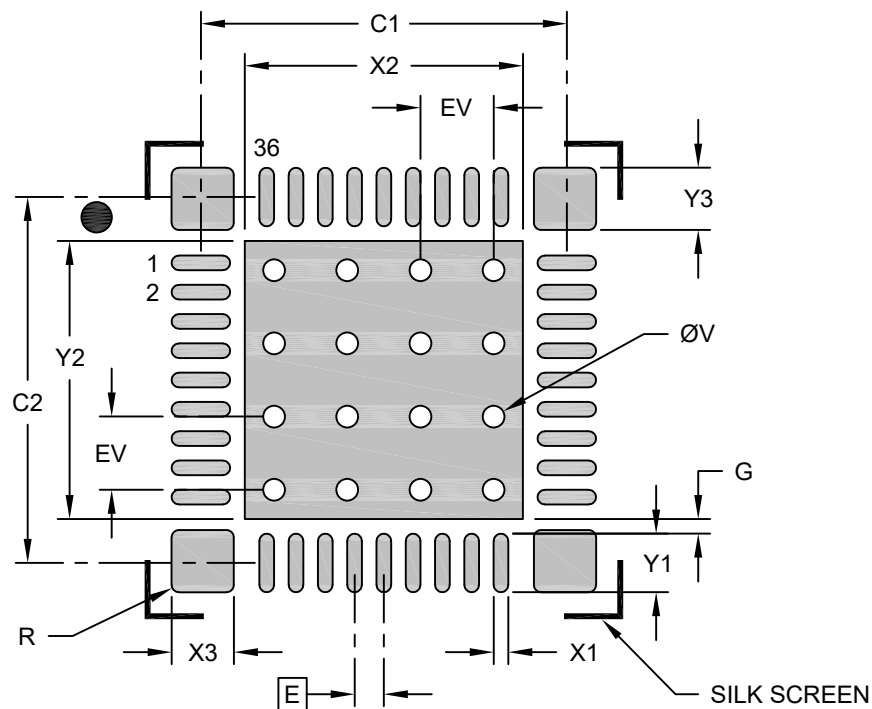

#### RECOMMENDED LAND PATTERN

| Units                           |    | MILLIMETERS |      |      |
|---------------------------------|----|-------------|------|------|
| Dimension Limits                |    | MIN         | NOM  | MAX  |
| Contact Pitch                   | E  | 0.40 BSC    |      |      |
| Center Pad Width                | X2 |             |      | 3.80 |
| Center Pad Length               | Y2 |             |      | 3.80 |
| Contact Pad Spacing             | C1 |             | 5.00 |      |
| Contact Pad Spacing             | C2 |             | 5.00 |      |
| Contact Pad Width (X36)         | X1 |             |      | 0.20 |
| Contact Pad Length (X36)        | Y1 |             |      | 0.80 |
| Corner Pad Width (X4)           | X3 |             |      | 0.85 |
| Corner Pad Length (X4)          | Y3 |             |      | 0.85 |
| Corner Pad Radius               | R  |             | 0.10 |      |
| Contact Pad to Center Pad (X36) | G  | 0.20        |      |      |
| Thermal Via Diameter            | V  |             | 0.30 |      |
| Thermal Via Pitch               | EV |             | 1.00 |      |

**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2436-M5 Rev D