



132-Lead Very Thin Plastic Quad Flat, No Lead Package (MXX) - 11x11x0.9 mm Body [VQFN]; Dual Row, Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

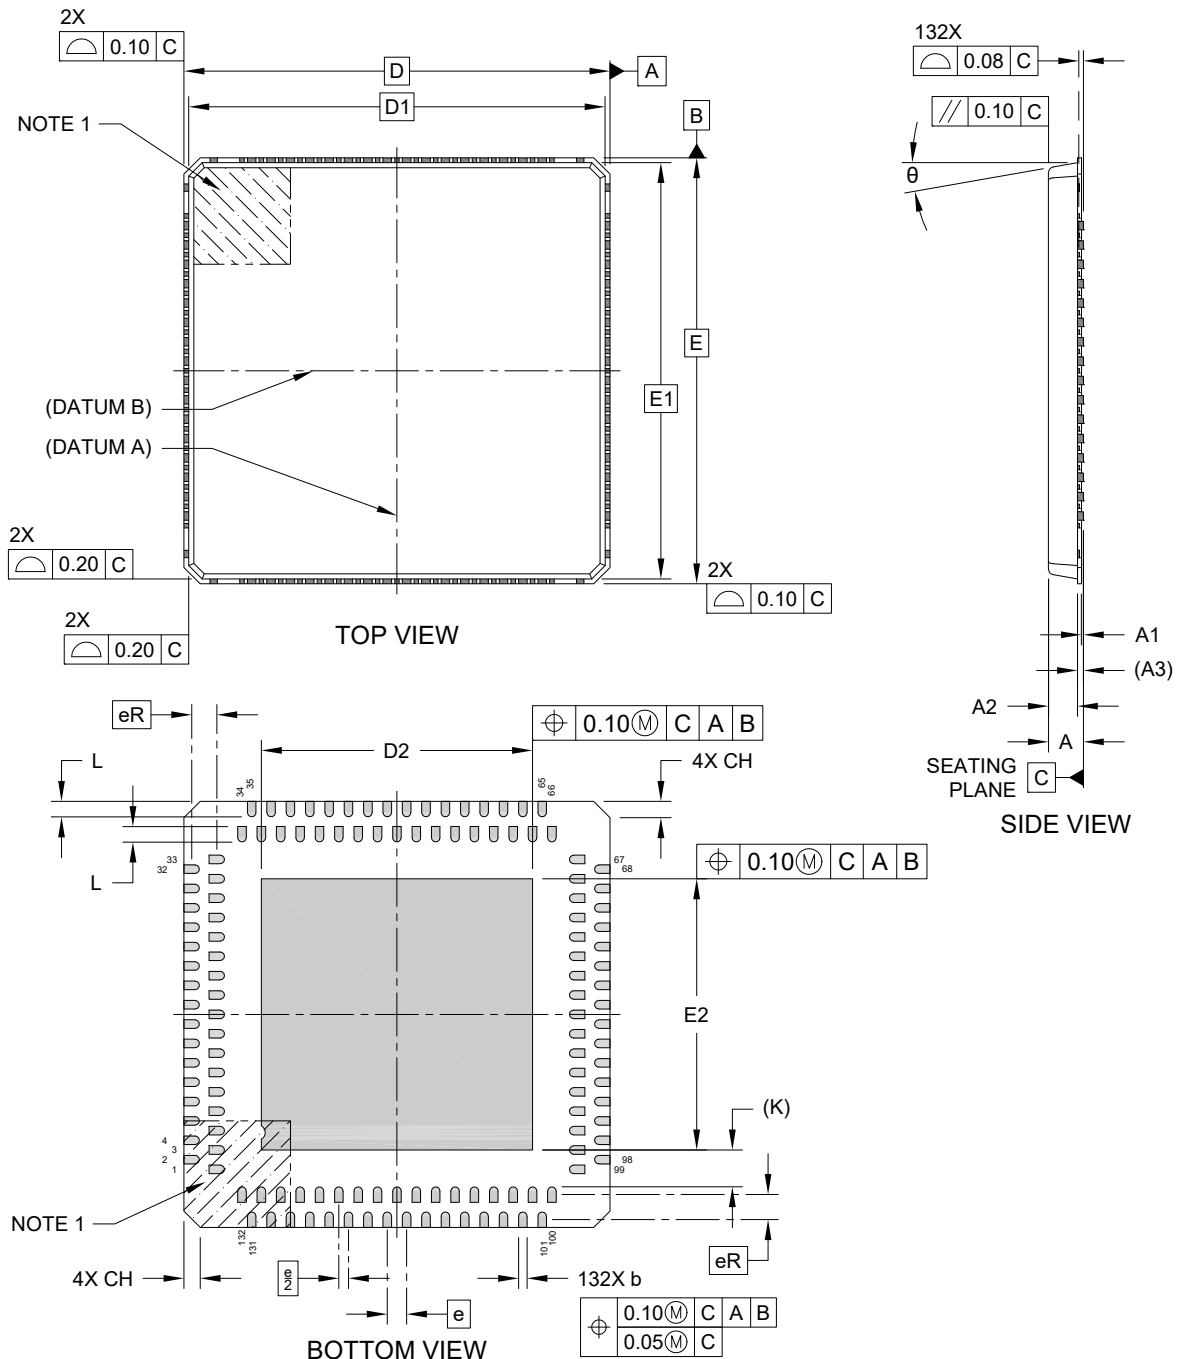

132-Lead Very Thin Plastic Quad Flat, No Lead Package (MXX) - 11x11x0.9 mm Body [VQFN]; Dual Row, Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

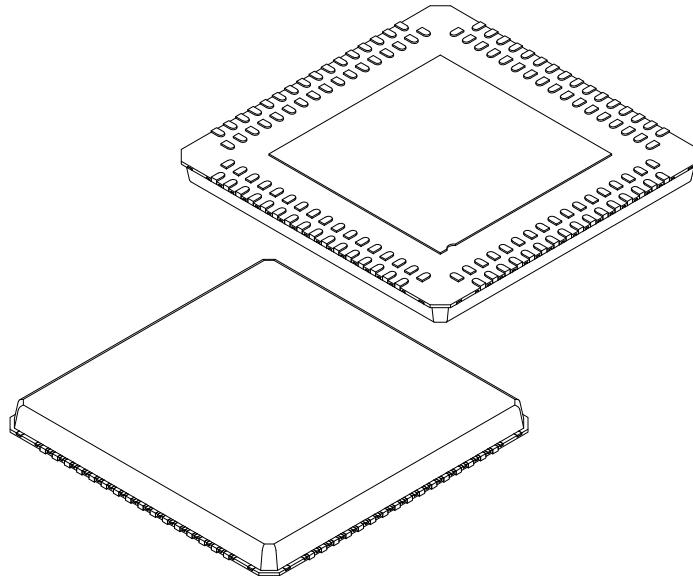


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	132		
Pitch	e	0.50 BSC		
Overall Height	A	–	–	0.90
Standoff	A1	0.00	0.02	0.05
Standoff	A2	–	0.70	0.75
Terminal Thickness	A3	0.152 REF		
Overall Length	D	11.00 BSC		
Overall Length	D1	10.75 BSC		
Exposed Pad Length	D2	6.90	7.00	7.10
Overall Width	E	11.00 BSC		
Overall Length	E1	10.75 BSC		
Exposed Pad Width	E2	6.90	7.00	7.10
Spacing Between Rows	eR	0.65 BSC		
Terminal Width	b	0.18	0.22	0.30
Terminal Length	L	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K	0.95 REF		
Package Corner Chamfer	CH	–	–	0.60
Mold Draft Angle	θ	5°	–	15°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is punch singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

132-Lead Very Thin Plastic Quad Flat, No Lead Package (MXX) - 11x11x0.9 mm Body [VQFN]; Dual Row, Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

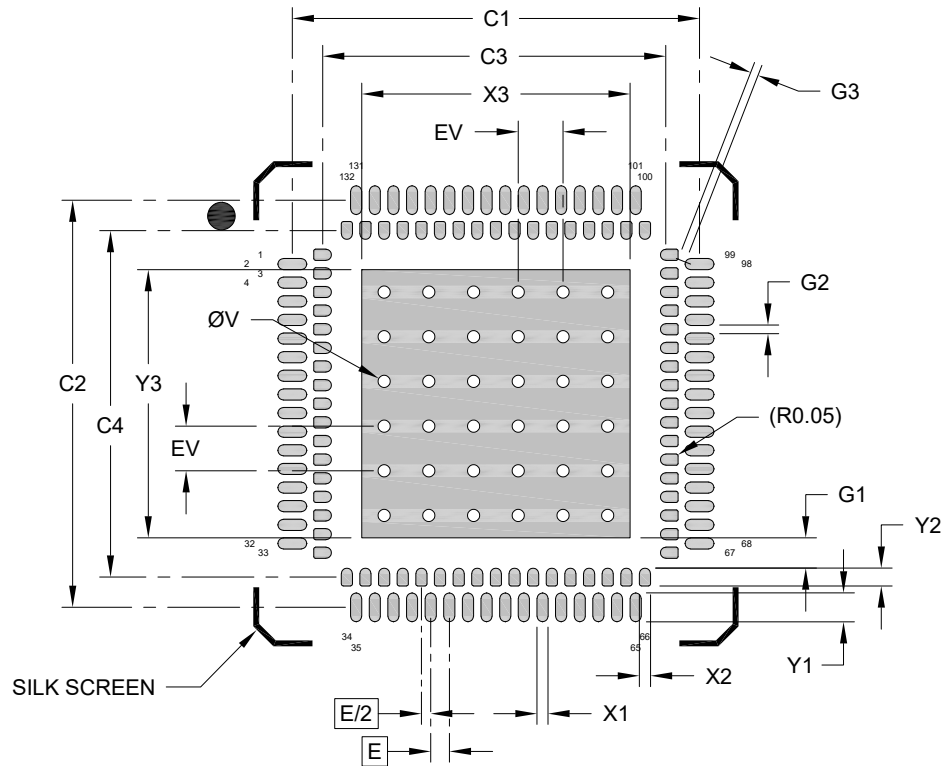

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X3			7.20
Optional Center Pad Length	Y3			7.20
Contact Pad Spacing	C1		10.93	
Contact Pad Spacing	C2		10.93	
Contact Pad Spacing	C3		9.21	
Contact Pad Spacing	C4		9.21	
Outer Contact Pad Width (X64)	X1			0.30
Outer Contact Pad Length (X64)	Y1			0.78
Inner Contact Pad Width (X68)	X2			0.30
Inner Contact Pad Length (X68)	Y2			0.48
Inner Contact Pad to Center Pad	G1	0.80		
Contact Pad to Contact Pad	G2	0.20		
Outer Contact Pad to Inner Contact Pad	G3	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		0.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2517 Rev B