



2-Lead Very Thin Single Flatpack No Lead Package (2EW) - 2.0x2.35x0.9 mm Body [VSFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

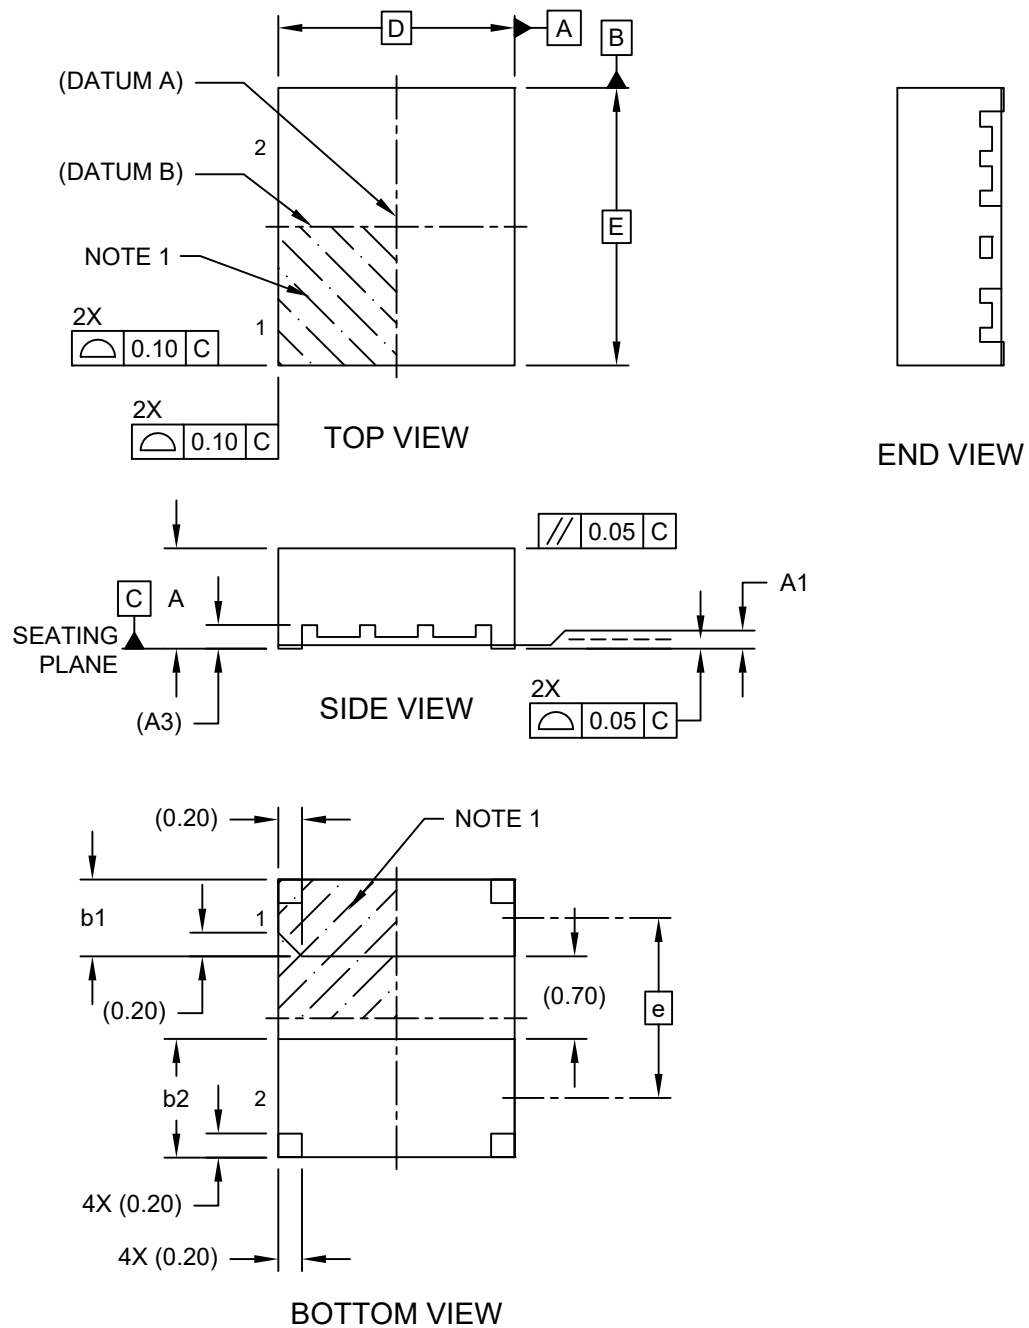

2-Lead Very Thin Single Flatpack No Lead Package (2EW) - 2.0x2.35x0.9 mm Body [VSFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

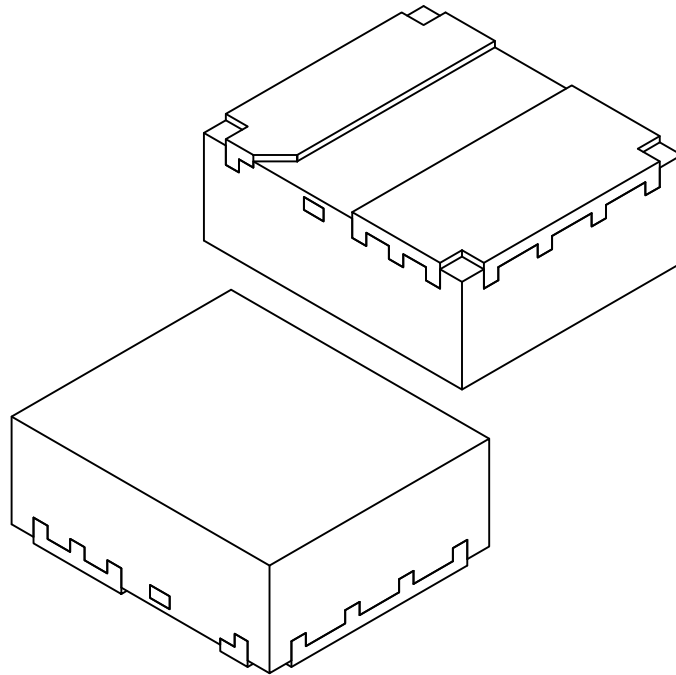


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	2		
Pitch	e	1.525 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	2.00 BSC		
Overall Width	E	2.35 BSC		
Terminal Width	b1	0.60	0.65	0.70
Terminal Width	b2	0.95	1.00	1.05

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

2-Lead Very Thin Single Flatpack No Lead Package (2EW) - 2.0x2.35x0.9 mm Body [VSFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

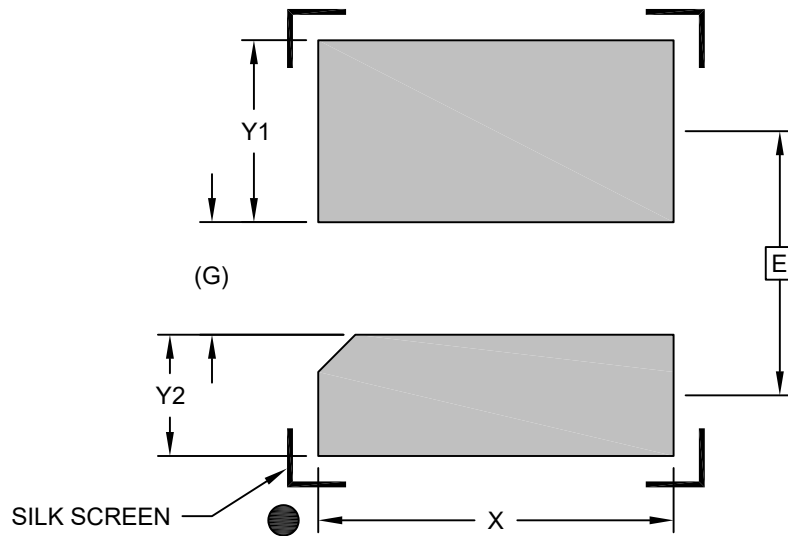

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.525 BSC		
Contact Pad Length (X2)	X			2.10
Contact Pad Width	Y1			1.05
Contact Pad Width	Y2			0.70
Contact Pad to Center Pad (Xnn)	G	0.587 REF		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2540 Rev A