



**24-Lead Thin Shrink Small Outline Package (2FW) - 4.4 mm Body [TSSOP]  
With 3.25x2.84 mm Exposed Pad**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

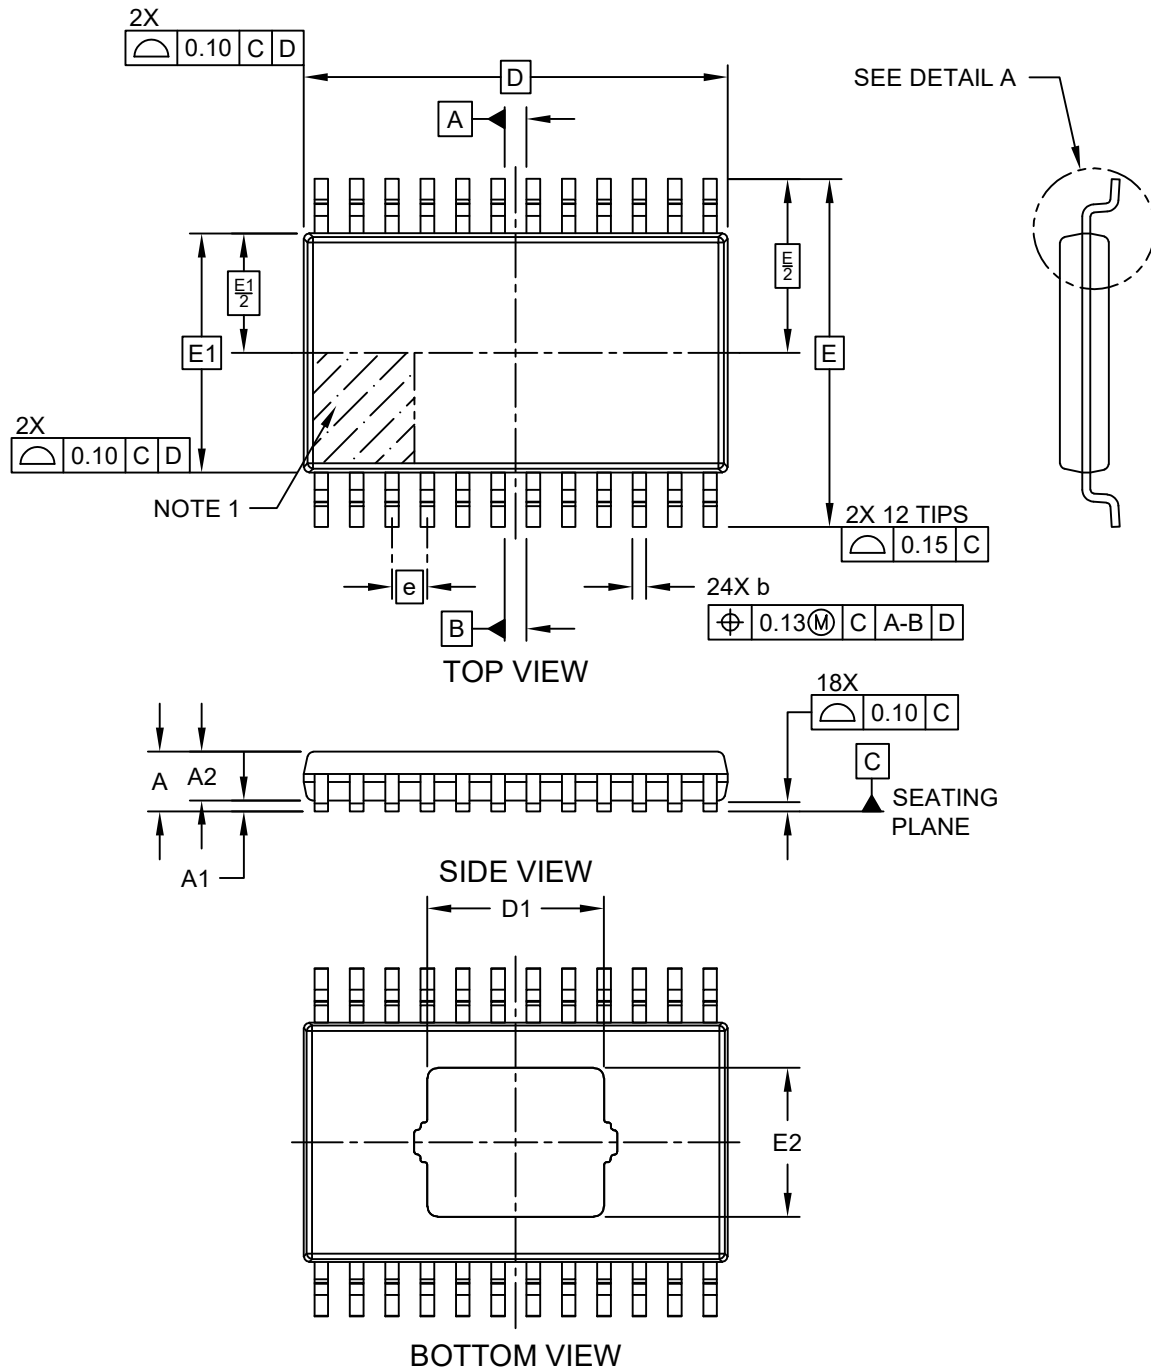

## 24-Lead Thin Shrink Small Outline Package (2FW) - 4.4 mm Body [TSSOP] With 3.25x2.84 mm Exposed Pad

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

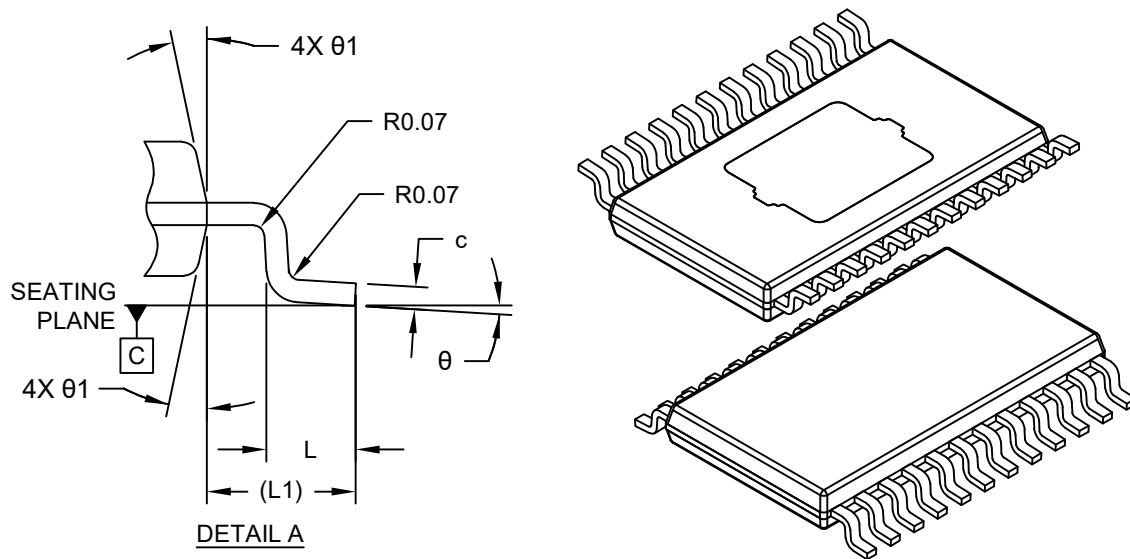


|                          | Units | MILLIMETERS |      |      |
|--------------------------|-------|-------------|------|------|
|                          |       | MIN         | NOM  | MAX  |
| Number of Terminals      | N     | 24          |      |      |
| Pitch                    | e     | 0.65 BSC    |      |      |
| Overall Height           | A     | -           | -    | 1.10 |
| Standoff                 | A1    | 0.05        | 0.10 | 0.15 |
| Molded Package Thickness | A2    | 0.85        | 0.90 | 0.95 |
| Overall Length           | D     | 7.80 BSC    |      |      |
| Overall Width            | E     | 6.40 BSC    |      |      |
| Molded Package Width     | E1    | 4.40 BSC    |      |      |
| Terminal Width           | b     | 0.19        | 0.25 | 0.30 |
| Terminal Thickness       | c     | 0.09        | 0.15 | 0.20 |
| Terminal Length          | L     | 0.45        | 0.60 | 0.75 |
| Footprint                | L1    | 1.00 REF    |      |      |
| Lead Bend Radius         | R1    | 0.07        | -    | -    |
| Lead Bend Radius         | R2    | 0.07        | -    | -    |
| Footprint Angle          | θ     | 0°          | -    | 8°   |
| Mold Draft Angle         | θ1    | 5°          | -    | 15°  |

### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

## 24-Lead Thin Shrink Small Outline Package (2FW) - 4.4 mm Body [TSSOP] With 3.25x2.84 mm Exposed Pad

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

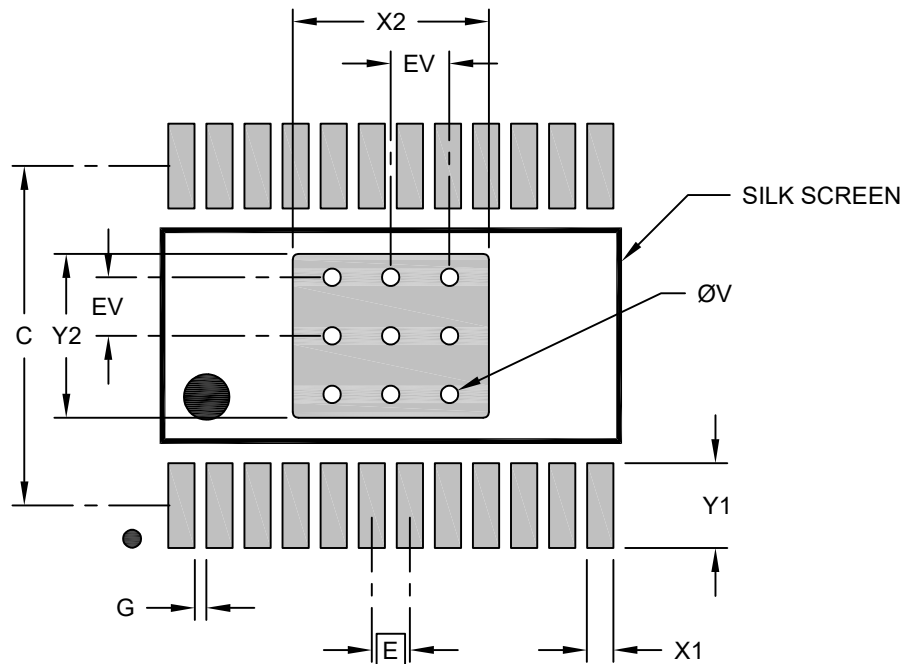

### RECOMMENDED LAND PATTERN

| Units                            |    | MILLIMETERS |      |      |
|----------------------------------|----|-------------|------|------|
| Dimension Limits                 |    | MIN         | NOM  | MAX  |
| Contact Pitch                    | E  | 0.65 BSC    |      |      |
| Center Pad Width                 | X2 |             |      | 3.35 |
| Center Pad Length                | Y2 |             |      | 2.80 |
| Contact Pad Spacing              | C  |             | 5.80 |      |
| Contact Pad Width (X24)          | X1 |             |      | 0.45 |
| Contact Pad Length (X24)         | Y1 |             |      | 1.45 |
| Contact Pad to Contact Pad (X22) | G  | 0.20        |      |      |
| Thermal Via Diameter             | V  |             | 0.30 |      |
| Thermal Via Pitch                | EV |             | 1.00 |      |

#### Notes:

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-541 Rev A