



180-Lead Very Thin Plastic Quad Flat, No Lead (2NW) - 14x14x0,9 mm Body [VQFN]
With 9.0 mm Exposed Pad and Dual Terminal Rows

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

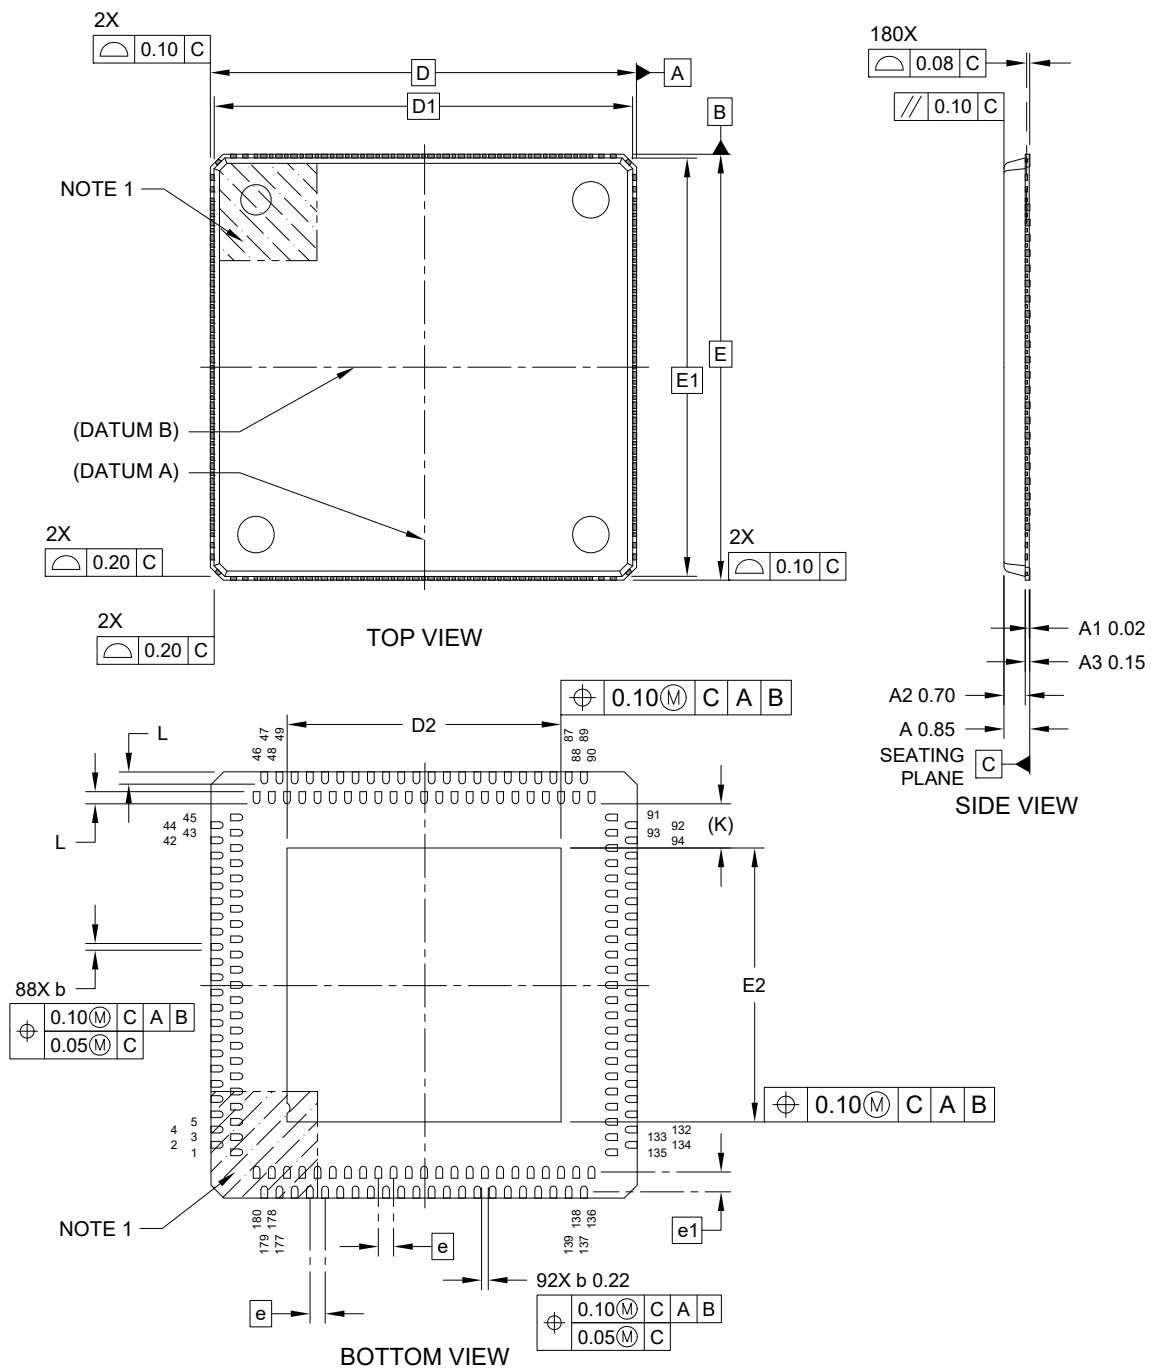

**180-Lead Very Thin Plastic Quad Flat, No Lead (2NW) - 14x14x0,9 mm Body [VQFN]
With 9.0 mm Exposed Pad and Dual Terminal Rows**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

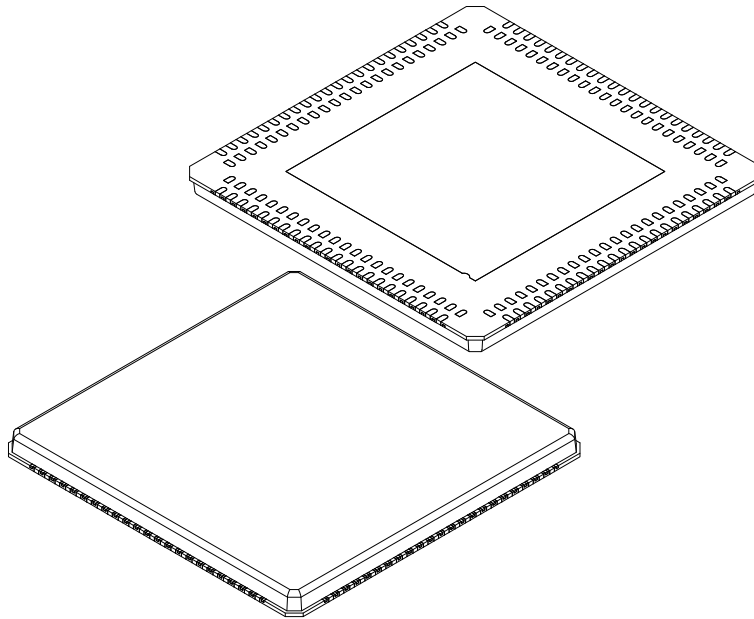


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		180		
Pitch	e		0.50 BSC		
Pitch Between Rows	e1		0.50 BSC		
Overall Height	A	–	–	–	0.90
Standoff	A1	0.00	–	–	0.05
Standoff	A2	–	0.70	–	0.75
Terminal Thickness	A3		0.152 REF		
Overall Length	D		14.00 BSC		
Mold Cap Length	D1		13.75 BSC		
Exposed Pad Length	D2	8.90	9.00	–	9.10
Overall Width	E		14.00 BSC		
Mold Cap Width	E1		13.75 BSC		
Exposed Pad Width	E2	8.90	9.00	–	9.10
Terminal Width	b	0.18	0.22	–	0.30
Terminal Length	L	0.30	0.40	–	0.50
Terminal-to-Exposed-Pad	K		1.45 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is punch singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

180-Lead Very Thin Plastic Quad Flat, No Lead (2NW) - 14x14x0,9 mm Body [VQFN] With 9.0 mm Exposed Pad and Dual Terminal Rows

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

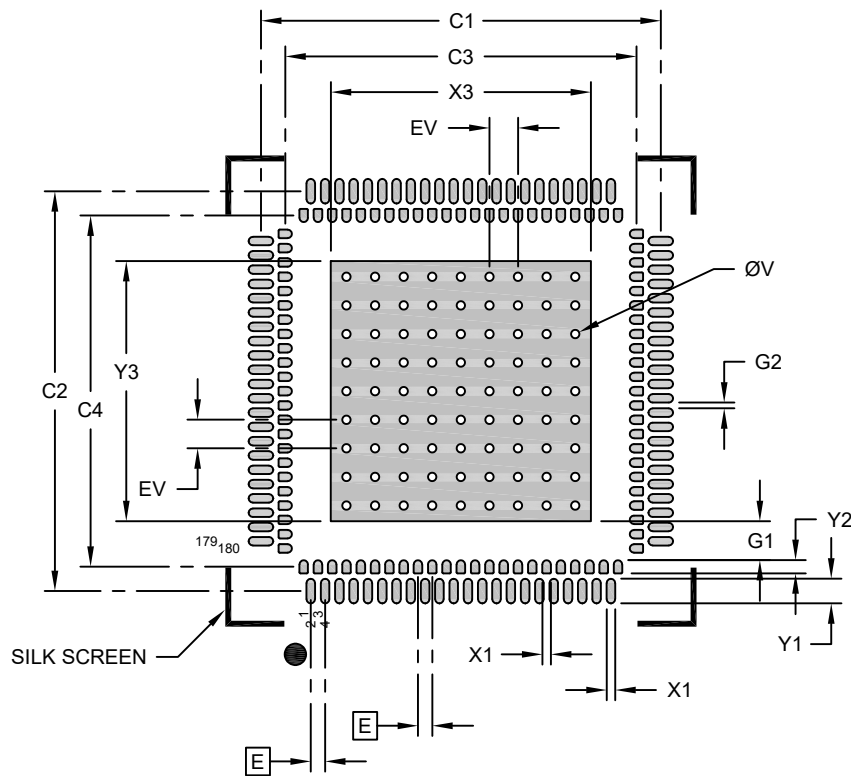

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Width	X3			9.10
Center Pad Length	Y3			9.10
Contact Pad Spacing	C1		13.98	
Contact Pad Spacing	C2		12.28	
Contact Pad Spacing	C3		13.98	
Contact Pad Spacing	C4		12.28	
Contact Pad Width (Xnn)	X1			0.38
Contact Pad Length (Xnn)	Y1			0.87
Contact Pad Length (Xnn)	Y2			0.46
Contact Pad to Center Pad (Xnn)	G1	1.36		
Contact Pad to Contact Pad (Xnn)	G2	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2548 Rev A