


22-Lead Very Thin Plastic Quad Flat, No Lead Package (3AW) - 5x8x0.9 mm Body [VQFN]


With Dual Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

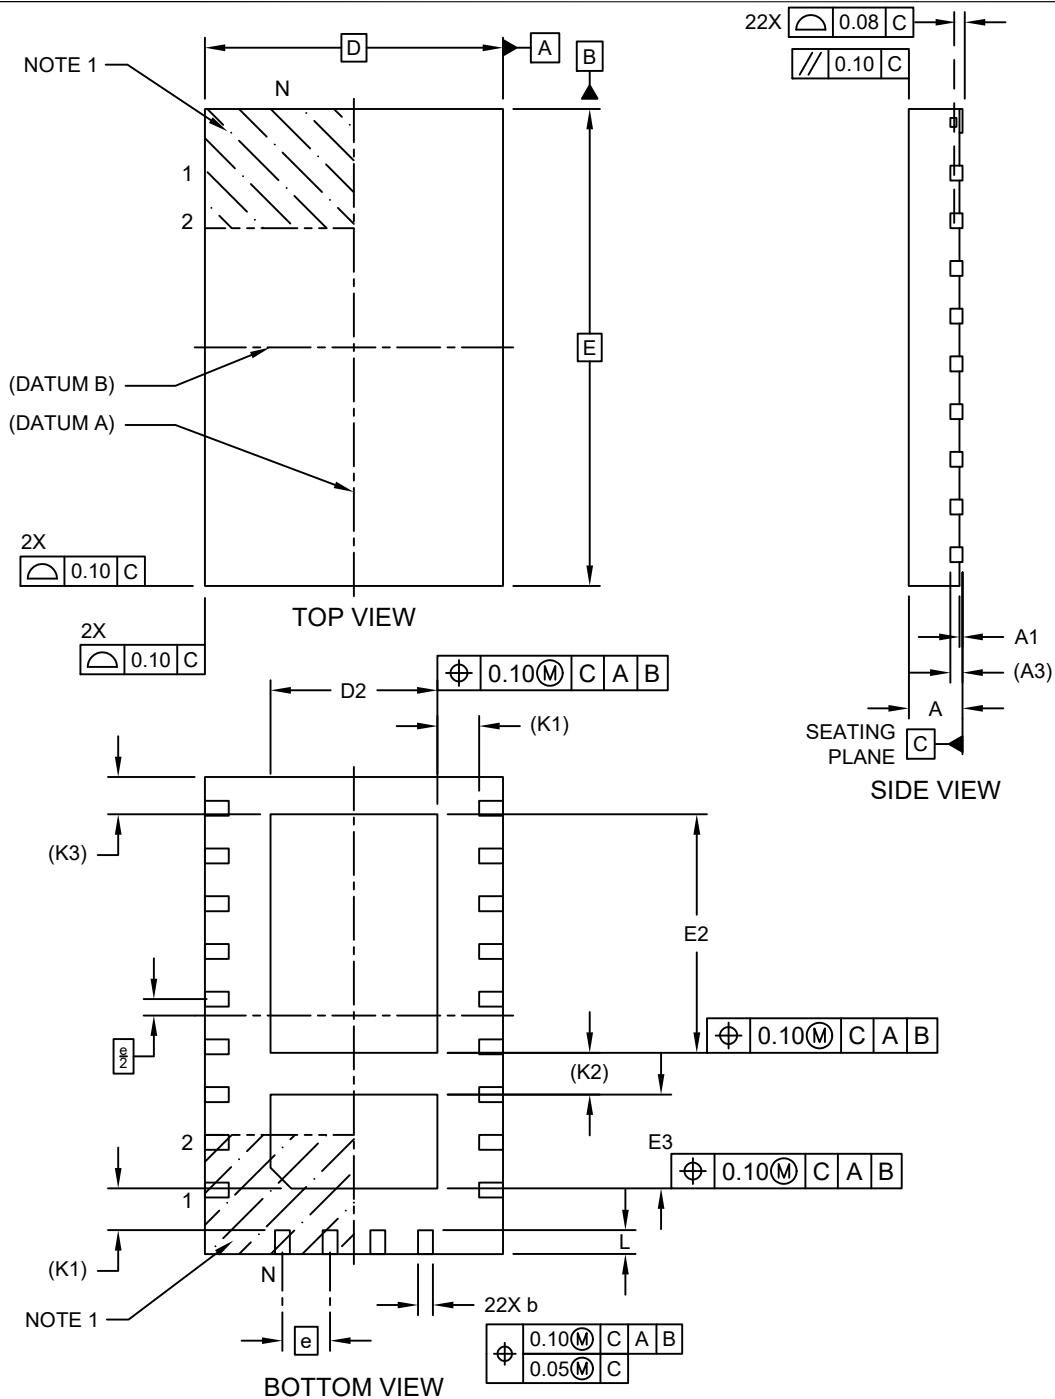

22-Lead Very Thin Plastic Quad Flat, No Lead Package (3AW) - 5x8x0.9 mm Body [VQFN] With Dual Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

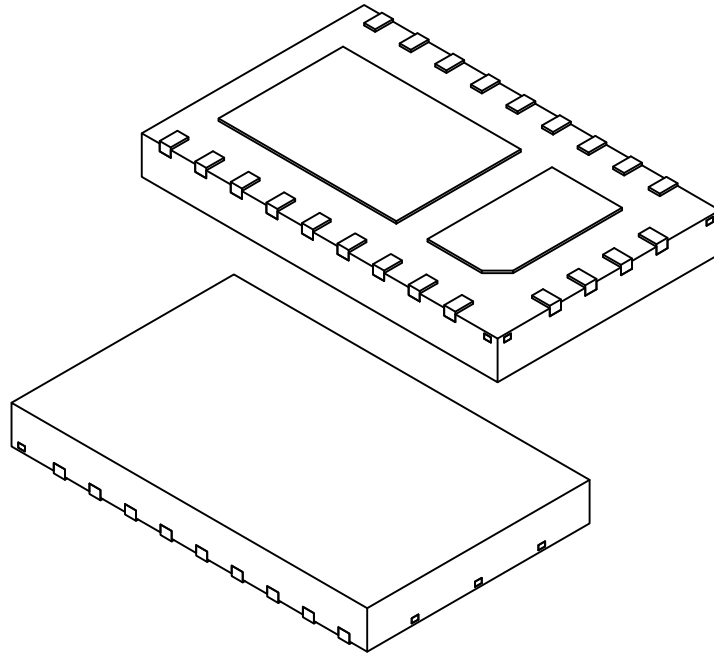


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	22		
Pitch	e	0.80 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	5.00 BSC		
Exposed Pad Length	D2	2.70	2.80	2.90
Overall Width	E	8.00 BSC		
Exposed Pad Width	E2	3.90	4.00	4.10
Exposed Pad Width	E3	1.48	1.58	1.68
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K1	0.70 REF		
Exposed-to-Exposed-Pad	K2	0.70 REF		
Edge-to-Exposed-Pad	K3	0.63 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

22-Lead Very Thin Plastic Quad Flat, No Lead Package (3AW) - 5x8x0.9 mm Body [VQFN] With Dual Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

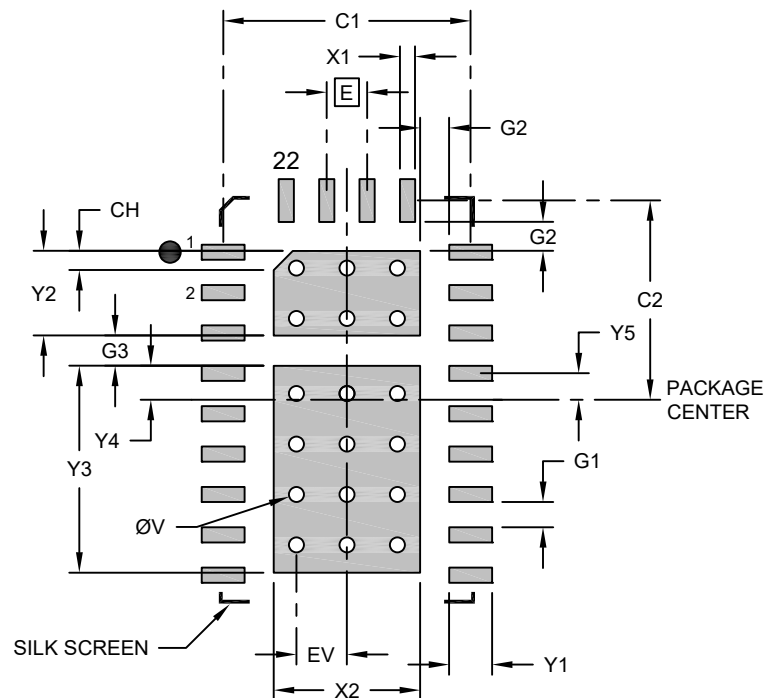

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
		MIN	NOM	MAX
Dimension Limits				
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		4.90	
Package Center to Contact Pad Center	C2		3.95	
Contact Pad Width (Xnn)	X1			0.30
Contact Pad Length (Xnn)	Y1			0.85
Center Pad Length	X2			2.90
Contact Pad Length (Xnn)	Y2			1.68
Center Pad Length	Y3			2.80
Package Center to Center Pad Edge	Y4			0.68
Package Center to Contact Pad Center	Y5			0.53
Contact Pad to Center Pad (Xnn)	G1	0.50		
Contact Pad to Contact Pad (Xnn)	G2	0.58		
Contact Pad to Contact Pad (Xnn)	G3	0.60		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2558 Rev A