



356-Ball FlipChip Chip Scale Package (3KW) - 17x17x1.68 mm Body [FCCSP] With Heat Spreader

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

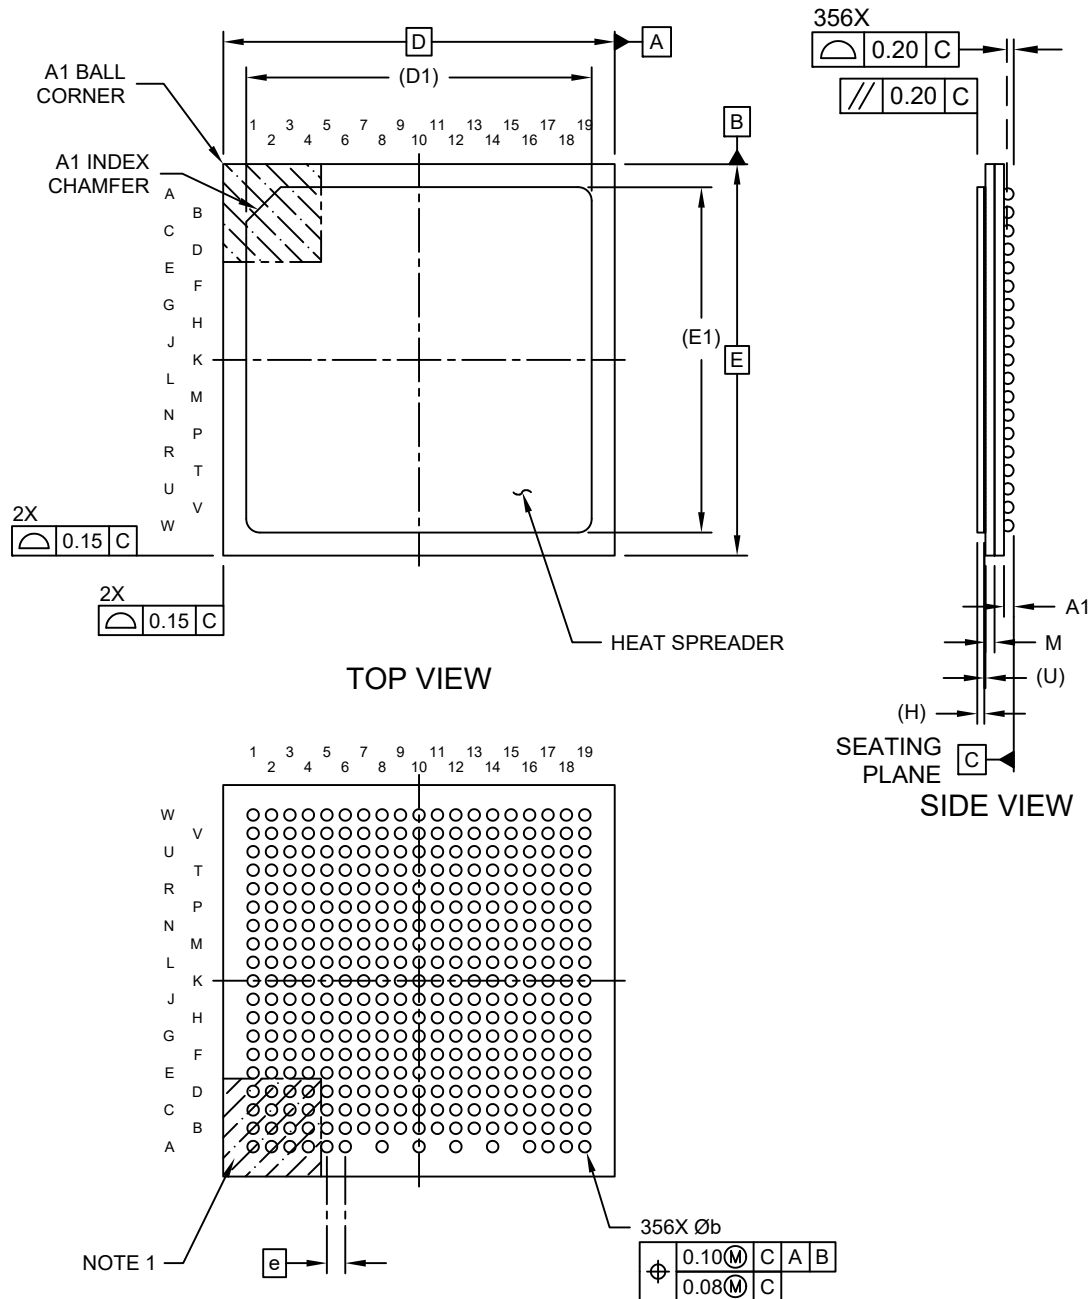

356-Ball FlipChip Chip Scale Package (3KW) - 17x17x1.68 mm Body [FCCSP] With Heat Spreader

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

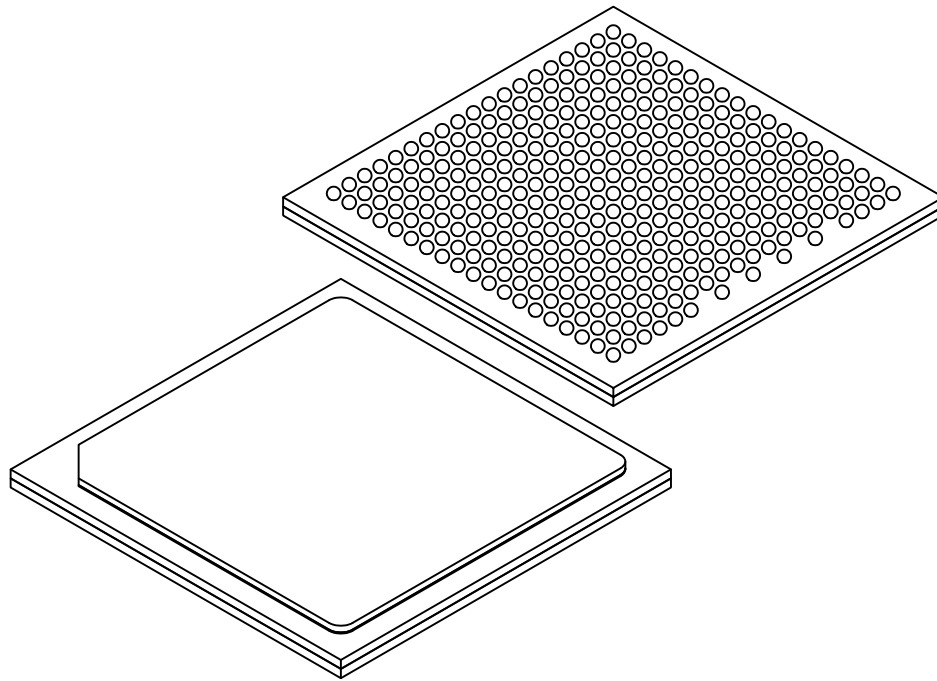


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	356		
Pitch	e	0.80 BSC		
Overall Height	A	—	—	1.68
Ball Height	A1	0.37	0.42	0.47
Mold Cap Thickness	M	0.35	0.40	0.45
Head Spreader Attach Thickness	U	0.05 REF		
Heat Spreader Thickness	H	0.30 REF		
Overall Length	D	17.00 BSC		
Heat Spreader Length	D1	15.00 REF		
Overall Width	E	17.00 BSC		
Heat Spreader Width	E1	15.00 REF		
Ball Diameter	b	0.46	0.51	0.56

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

356-Ball FlipChip Chip Scale Package (3KW) - 17x17x1.68 mm Body [FCCSP] With Heat Spreader

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

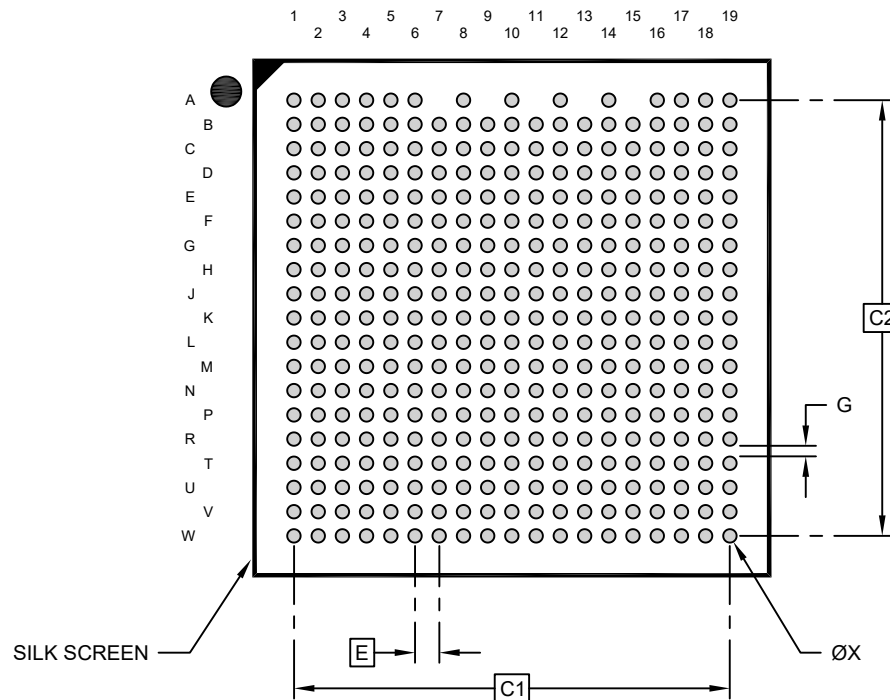

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1	14.40 BSC		
Contact Pad Spacing	C2	14.40 BSC		
Contact Pad Width (Xnn)	X			0.45
Contact Pad to Contact Pad (Xnn)	G	0.35		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.