



Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



38-Lead Very Thin Plastic Quad Flat, No Lead Package (3MW) - 8x8x0.9 mm Body [VQFN] With Multiple Exposed Pads and Fused Terminals

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

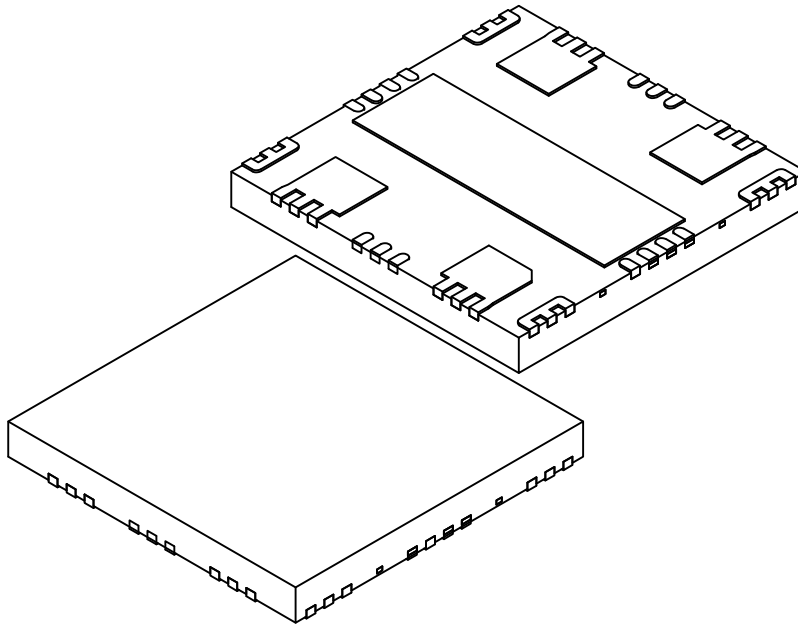


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		000		
Pitch	e		0.50 BSC		
Pitch	e2		1.25 BSC		
Pitch	e3		1.825 BSC		
Overall Height	A		0.80	0.85	0.90
Standoff	A1		0.00	0.02	0.05
Terminal Thickness	A3		0.203 REF		
Overall Length	D		8.00 BSC		
Exposed Pad Length	D2		2.14	2.24	2.34
Exposed Pad Length	D3		1.23	1.33	1.43
Overall Width	E		8.00 BSC		
Exposed Pad Width	E2		6.90	7.00	7.10
Exposed Pad Width	E3		1.34	1.44	1.54
Terminal Width	b		0.20	0.25	0.30
Terminal Length	L		0.30	0.40	0.50

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

38-Lead Very Thin Plastic Quad Flat, No Lead Package (3MW) - 8x8x0.9 mm Body [VQFN] With Multiple Exposed Pads and Fused Terminals

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

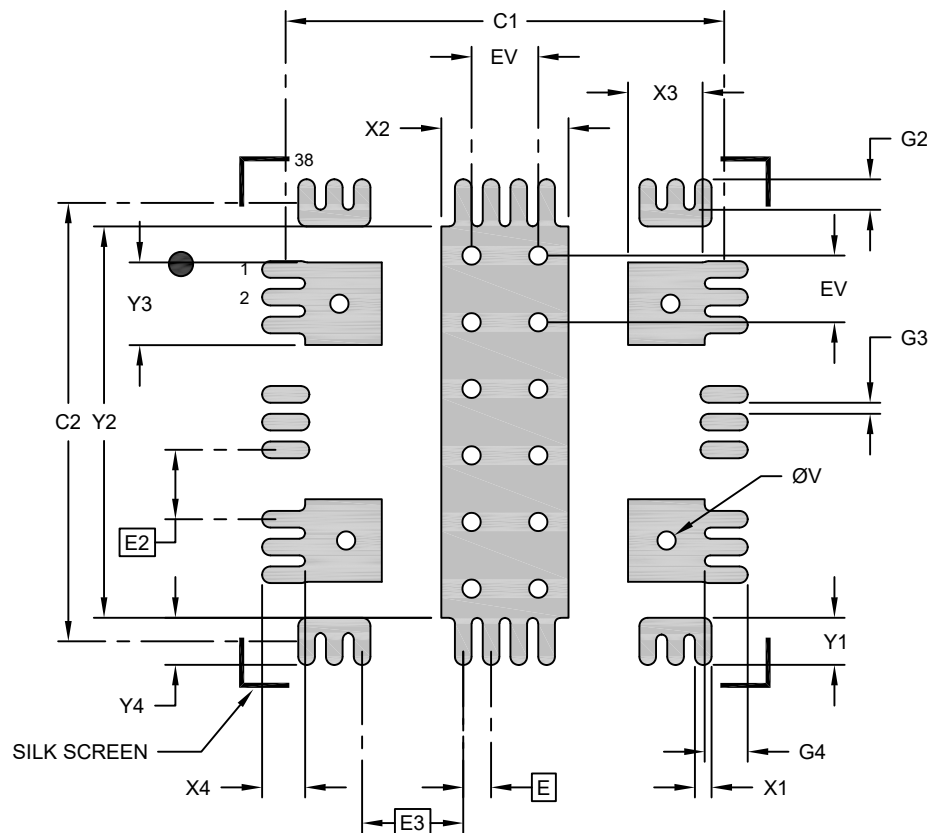

RECOMMENDED LAND PATTERN

Units		MILLIMETERS			Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX	Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.50 BSC		Pad Length (X4)	X3			1.34
Contact Pitch (X4)	E2		1.25 BSC		Contact Pad Length (X8)	X4			0.78
Contact Pitch (X4)	E3		1.82 BSC		Pad Width (X4)	Y3			1.49
Center Pad Width	X2			2.29	Contact Pad Length	Y4			0.85
Center Pad Length	Y2			7.05	Center Pad Width	G2	0.55		
Contact Pad Spacing	C1		7.90		Contact Pad to Contact Pad (X26)	G3	0.20		
Contact Pad Spacing	C2		7.90		Thermal Via Diameter	V		0.33	
Contact Pad Width (X38)	X1			0.30	Thermal Via Pitch	EV		1.20	
Contact Pad Length	Y1			0.85					

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2566 Rev A