



2-Lead Extremely Thin Dual Flatpack No-lead Package (3RW) - 1x0.6x.05 mm Body [XDFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

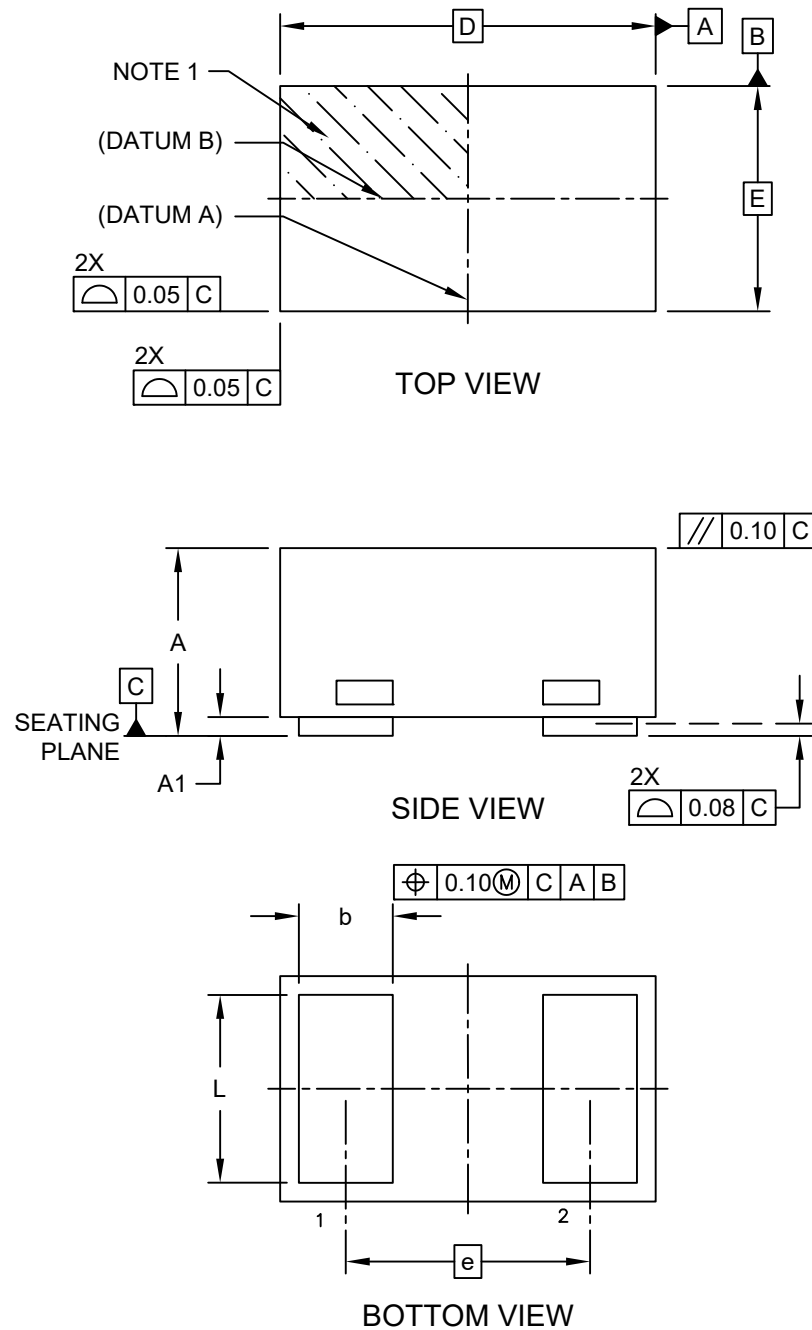

2-Lead Extremely Thin Dual Flatpack No-lead Package (3RW) - 1x0.6x.05 mm Body [XDFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

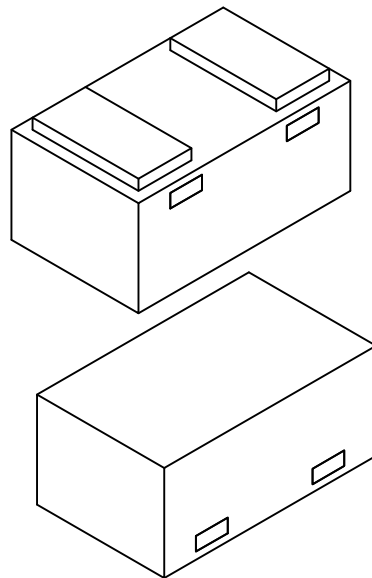


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	2		
Pitch	e	0.65 BSC		
Overall Height	A	0.41	0.45	0.50
Standoff	A1	0.00	0.02	0.05
Overall Length	D	1.00 BSC		
Overall Width	E	0.60 BSC		
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.45	0.50	0.55

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

2-Lead Extremely Thin Dual Flatpack No-lead Package (3RW) - 1x0.6x.05 mm Body [XDFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

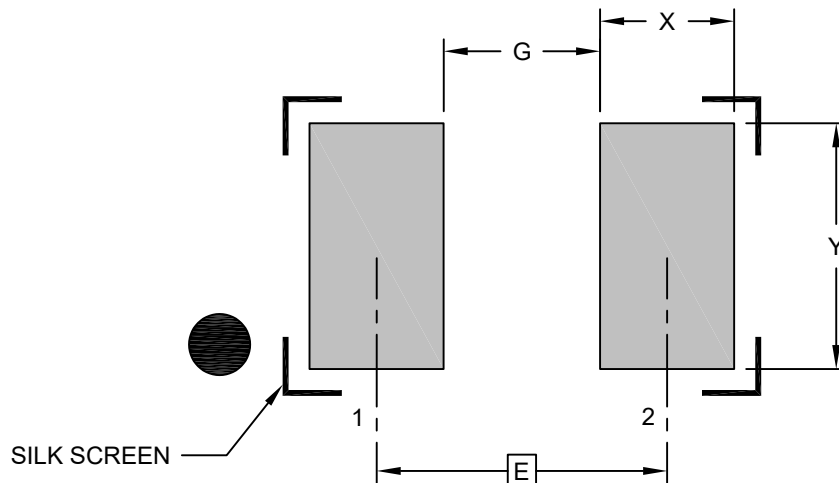

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65		
Contact Pad Width (Xnn)	X			0.30
Contact Pad Length (Xnn)	Y			0.55
Contact Pad to Contact Pad (Xnn)	G	0.35		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2570 Rev A