



10-Lead Ultra Thin Plastic Dual Flat, No Lead Package (3VW) - 2x2x0.55 mm Body [UDFN] Saw Singulated with Pullback Leads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

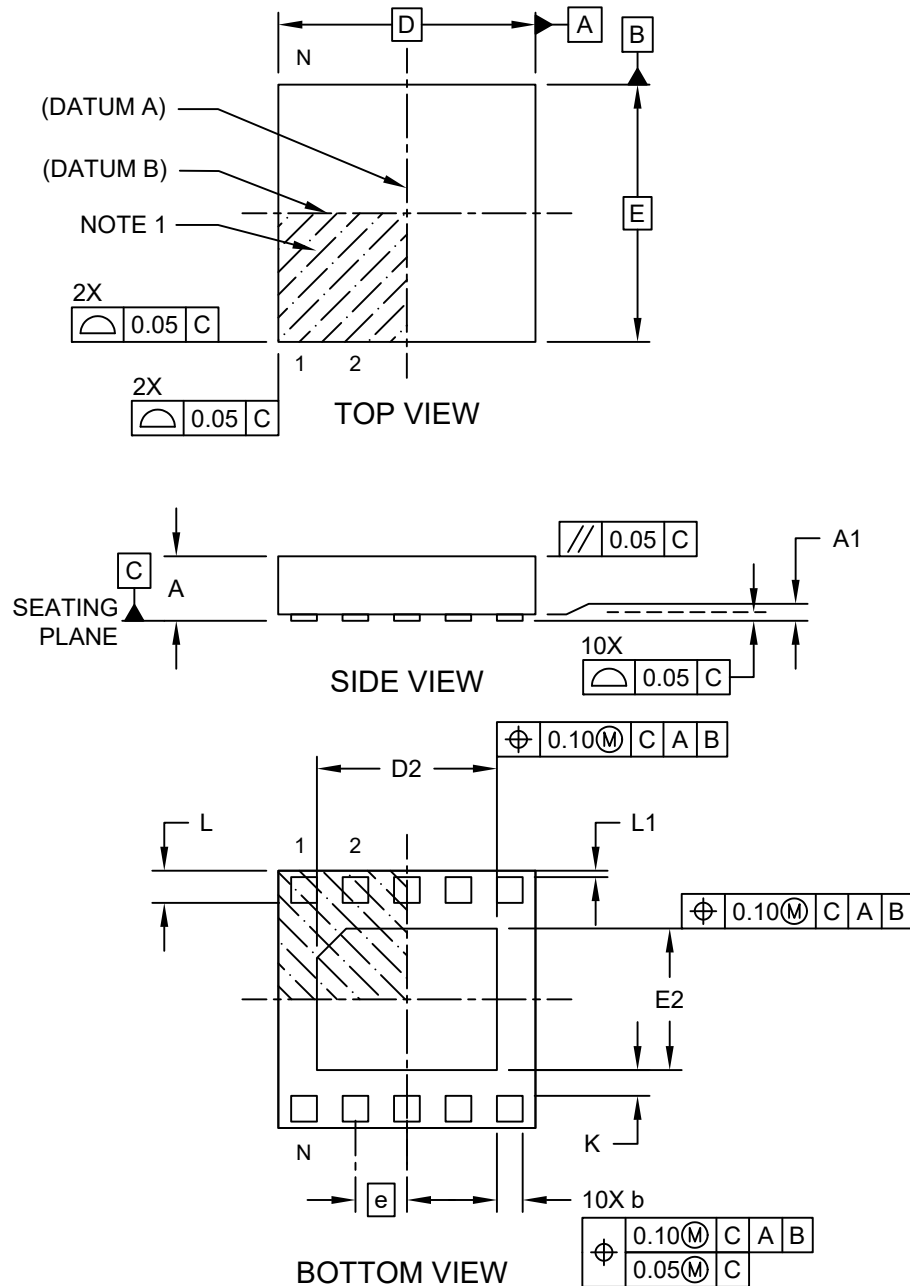

10-Lead Ultra Thin Plastic Dual Flat, No Lead Package (3VW) - 2x2x0.55 mm Body [UDFN] Saw Singulated with Pullback Leads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

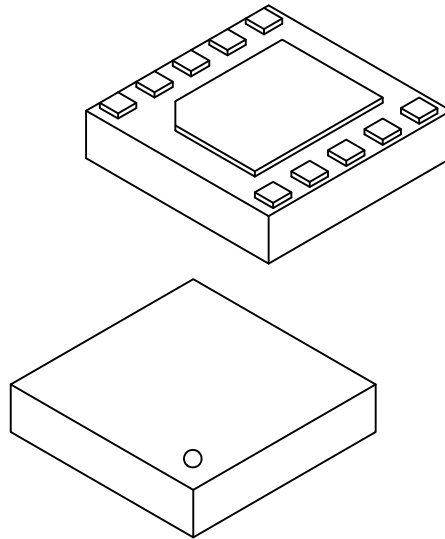


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		10		
Pitch	e		0.40 BSC		
Overall Height	A		0.45	0.50	0.55
Standoff	A1		0.00	–	0.05
Overall Length	D		2.00 BSC		
Exposed Pad Length	D2		1.35	1.40	1.45
Overall Width	E		2.00 BSC		
Exposed Pad Width	E2		1.05	1.10	1.15
Terminal Width	b		0.15	0.20	0.25
Terminal Length	L		0.15	0.20	0.25
Terminal Pullback	L1		0.05 REF		
Terminal-to-Exposed-Pad	K		0.20 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

10-Lead Ultra Thin Plastic Dual Flat, No Lead Package (3VW) - 2x2x0.55 mm Body [UDFN] Saw Singulated with Pullback Leads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

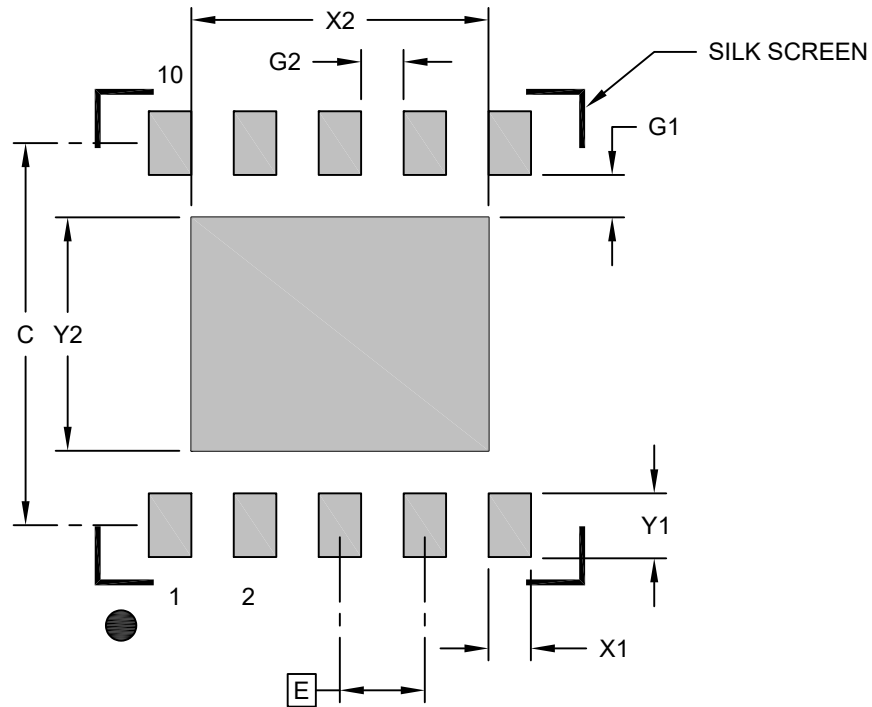

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.40 BSC		
Center Pad Width	X2			1.40
Center Pad Length	Y2			1.10
Contact Pad Spacing	C		1.80	
Contact Pad Width (X10)	X1			0.20
Contact Pad Length (X10)	Y1			0.30
Contact Pad to Center Pad (X10)	G1	0.20		
Contact Pad to Contact Pad (X8)	G2	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2574 Rev A