


Packaging Diagrams and Parameters

8-Ball Wafer Level Chip Scale Package (3XW) - [WLCSP]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

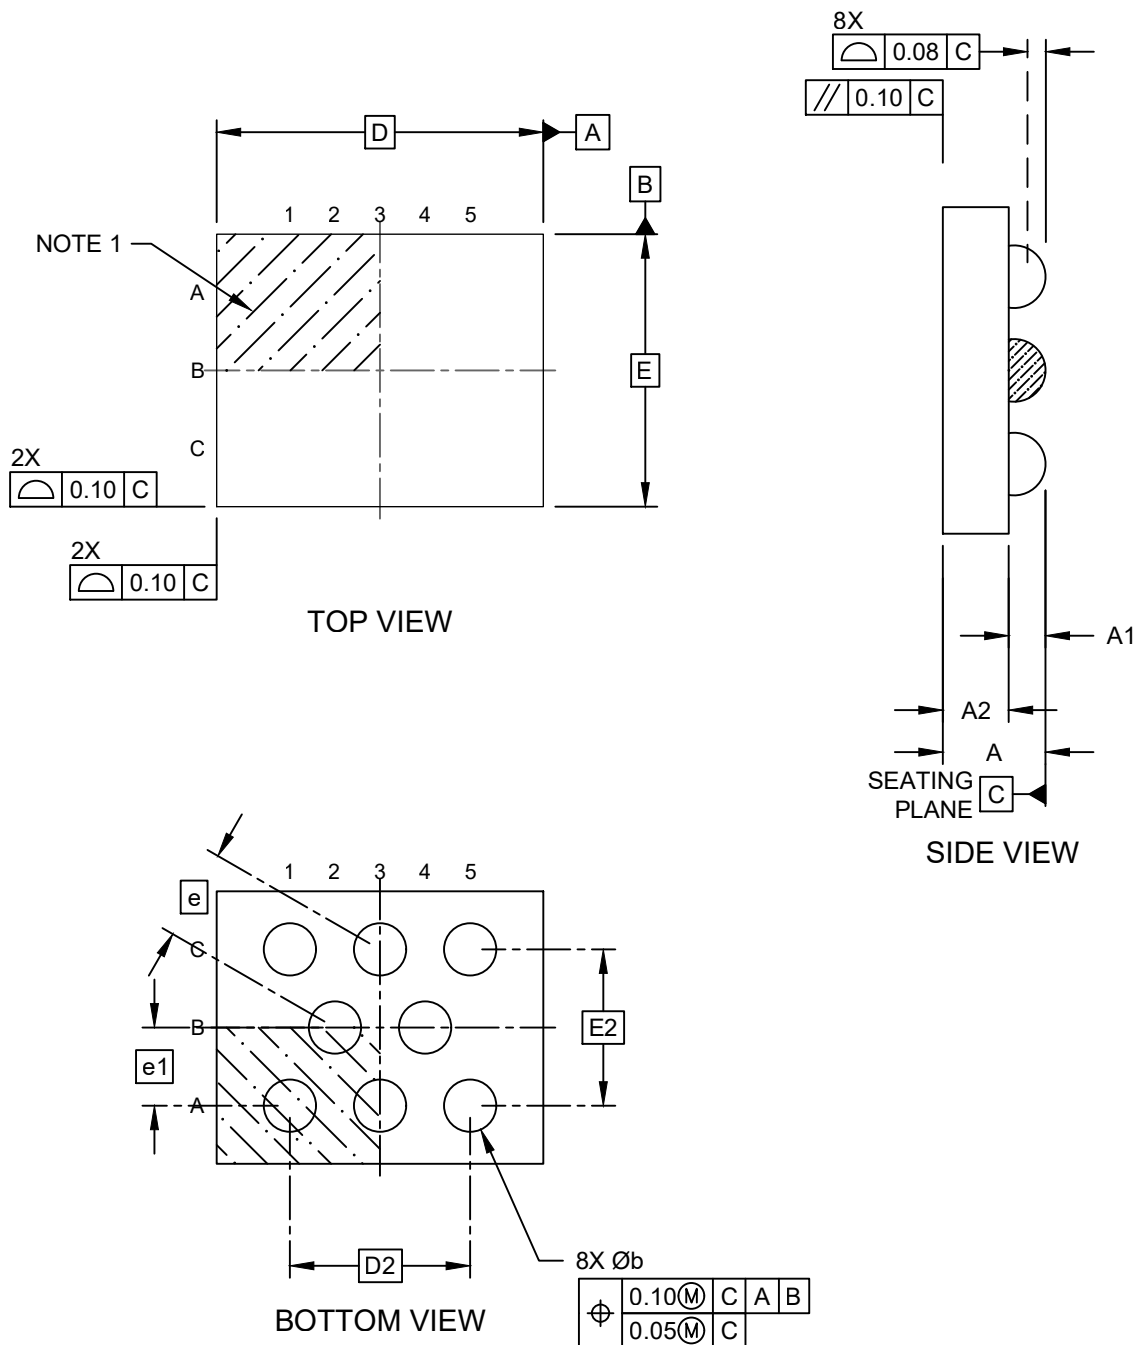

Packaging Diagrams and Parameters

8-Ball Wafer Level Chip Scale Package (3XW) - [WLCSP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

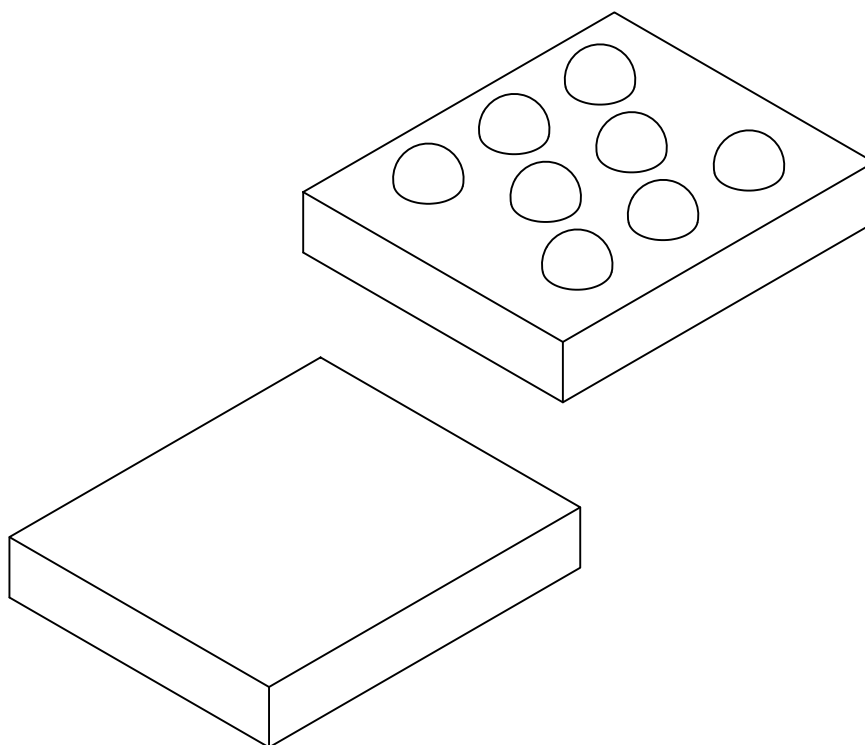

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	8		
Pitch	e	0.500 BSC		
Pitch	e1	0.434 BSC		
Overall Height	A	0.433	0.475	0.517
Ball Height	A1	0.153	0.170	0.187
Die Thickness	A2	0.280	0.305	0.330
Overall Length	D	See Note 4.		
Ball Array Length	D2	1.000 BSC		
Overall Width	E	See Note 4.		
Ball Array Width	E2	0.867 BSC		
Ball Diameter	b	0.249	0.293	0.337


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.
- Please contact your local Microchip representative for details.

Land Pattern

8-Ball Wafer Level Chip Scale Package (3XW) - [WLCSP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

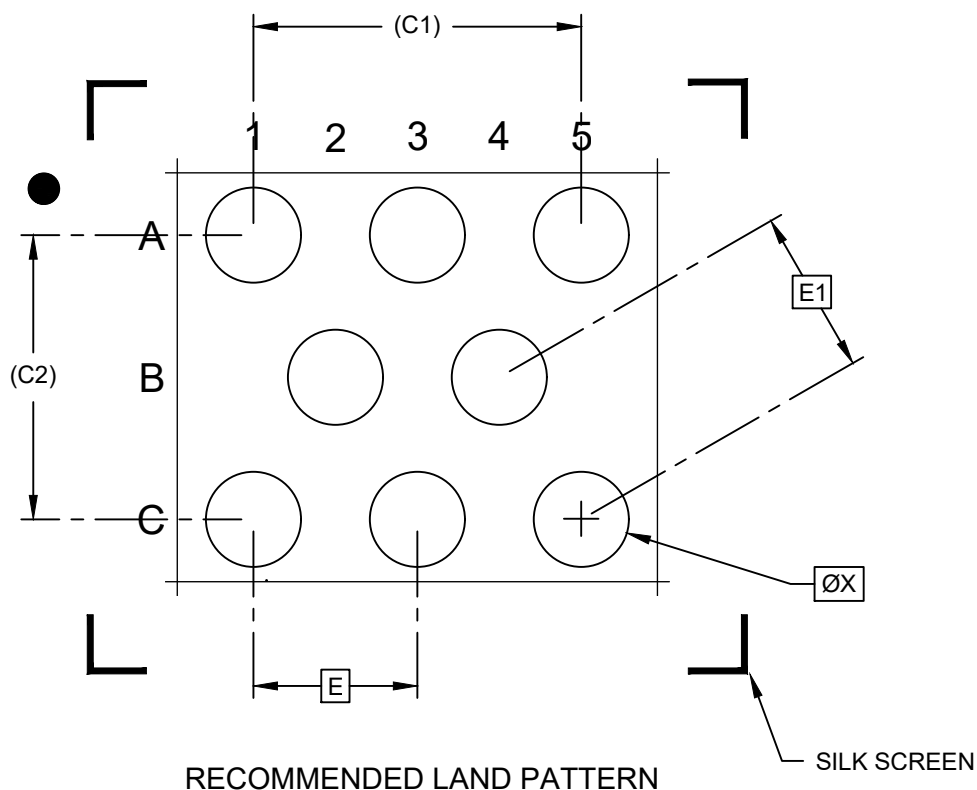

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.500 BSC		
Contact Staggered Pitch	E1	0.500 BSC		
Contact Pad Spacing	C1	1.000 REF		
Contact Pad Spacing	C2	0.867 REF		
Contact Pad Diameter (X8)	X	0.293 BSC		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process