


Packaging Diagrams and Parameters

10-Lead Very Thin Plastic Dual Flat, No Lead Package (4BW) - 3x3x0.9 mm Body [VDFN] With 2.3x1.7 mm Exposed Pad and Step Cut Wettable Flanks


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

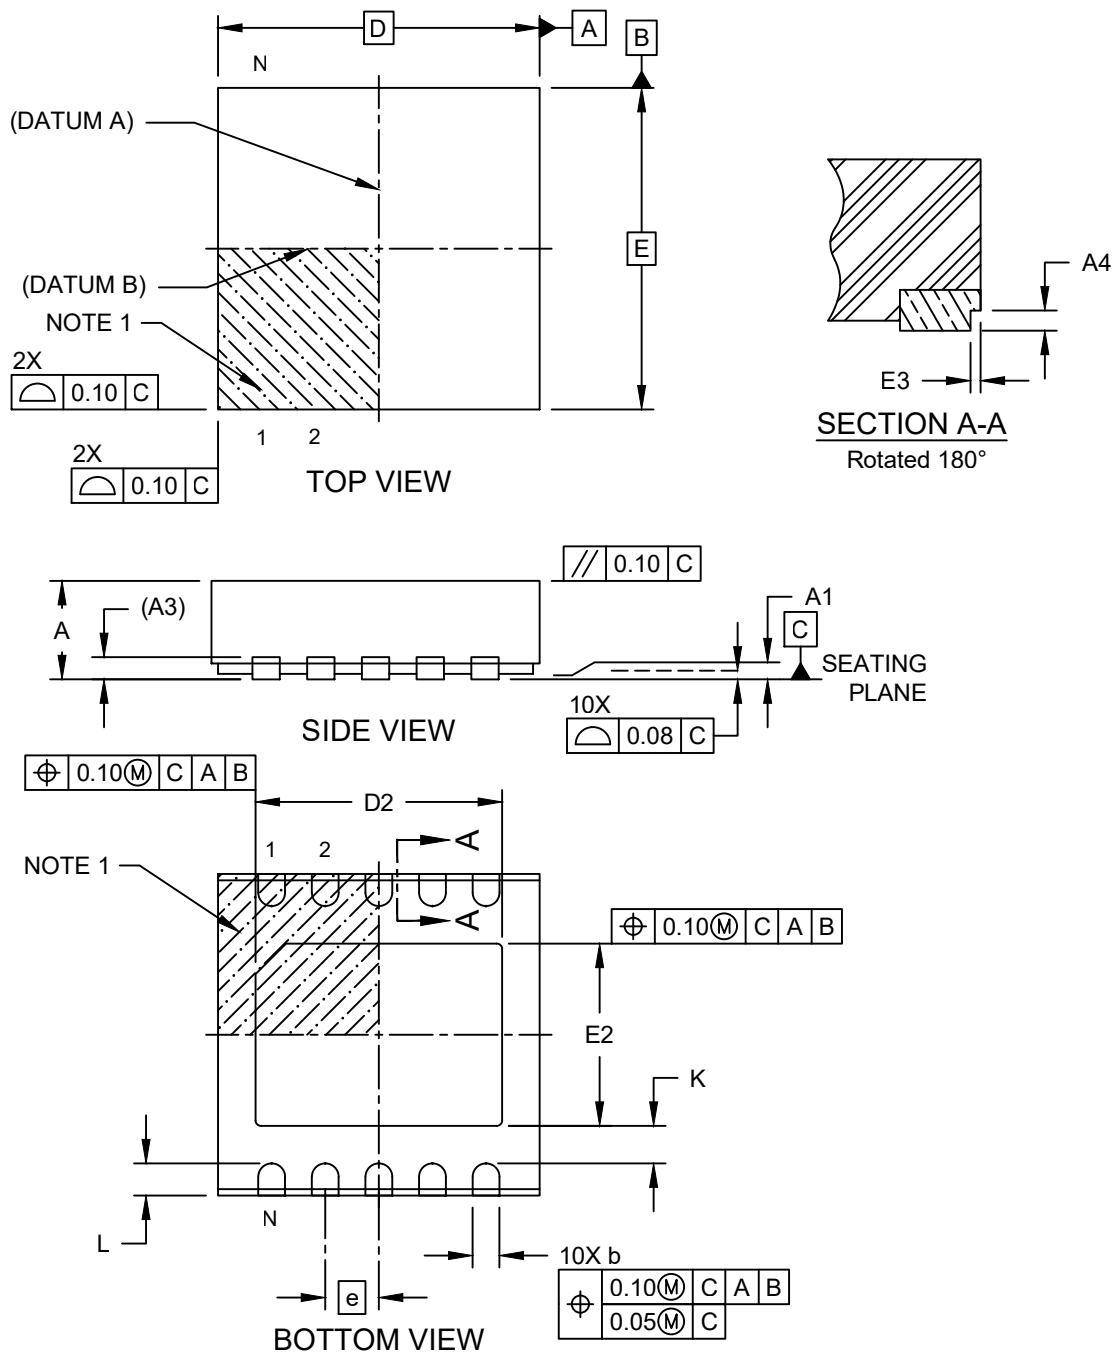

Packaging Diagrams and Parameters

10-Lead Very Thin Plastic Dual Flat, No Lead Package (4BW) - 3x3x0.9 mm Body [VDFN] With 2.3x1.7 mm Exposed Pad and Step Cut Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

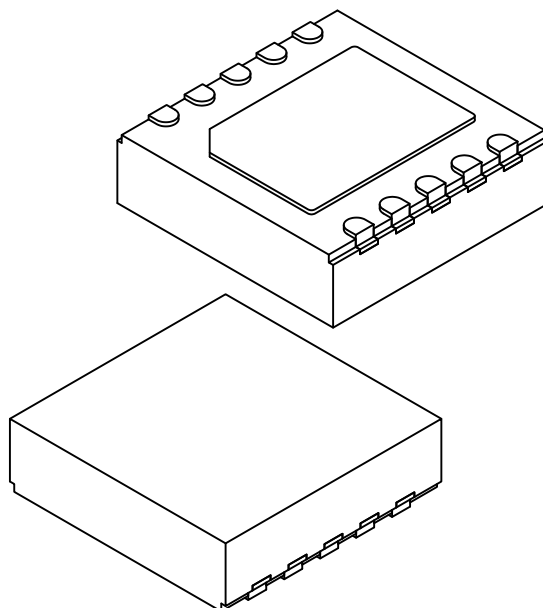

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		10	
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.90	1.00
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	3.00 BSC		
Exposed Pad Length	D2	2.20	2.30	2.40
Overall Width	E	3.00 BSC		
Exposed Pad Width	E2	1.60	1.70	1.80
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.20	0.30	0.40
Terminal-to-Exposed-Pad	K	0.20	—	—
Wettable Flank Step Cut Width	E3	0.035	0.06	0.085
Wettable Flank Step Cut Depth	A4	0.10	—	0.19


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

10-Lead Very Thin Plastic Dual Flat, No Lead Package (4BW) - 3x3x0.9 mm Body [VDFN] With 2.3x1.7 mm Exposed Pad and Step Cut Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

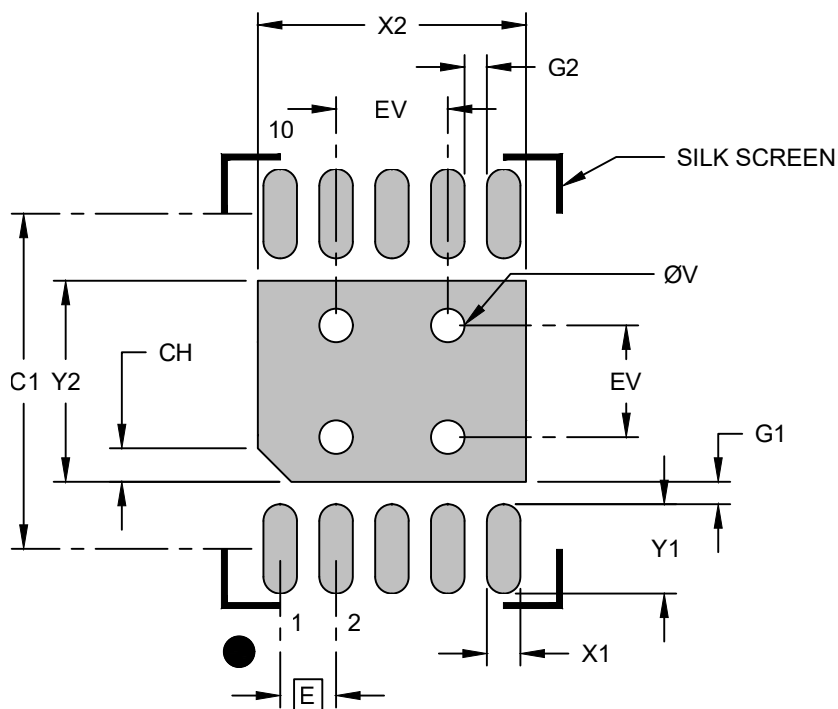

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Width	X2			2.40
Center Pad Length	Y2			1.80
Contact Pad Spacing	C1		3.00	
Contact Pad Width (X10)	X1			0.30
Contact Pad Length (X10)	Y1			0.80
Pin 1 Index Chamfer	CH		0.30	
Contact Pad to Center Pad (X10)	G1	0.20		
Contact Pad to Contact Pad (X8)	G2	0.25		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during the reflow process.