


Packaging Diagrams and Parameters

2-Lead Transistor Outline (6FW) - [TO-263]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

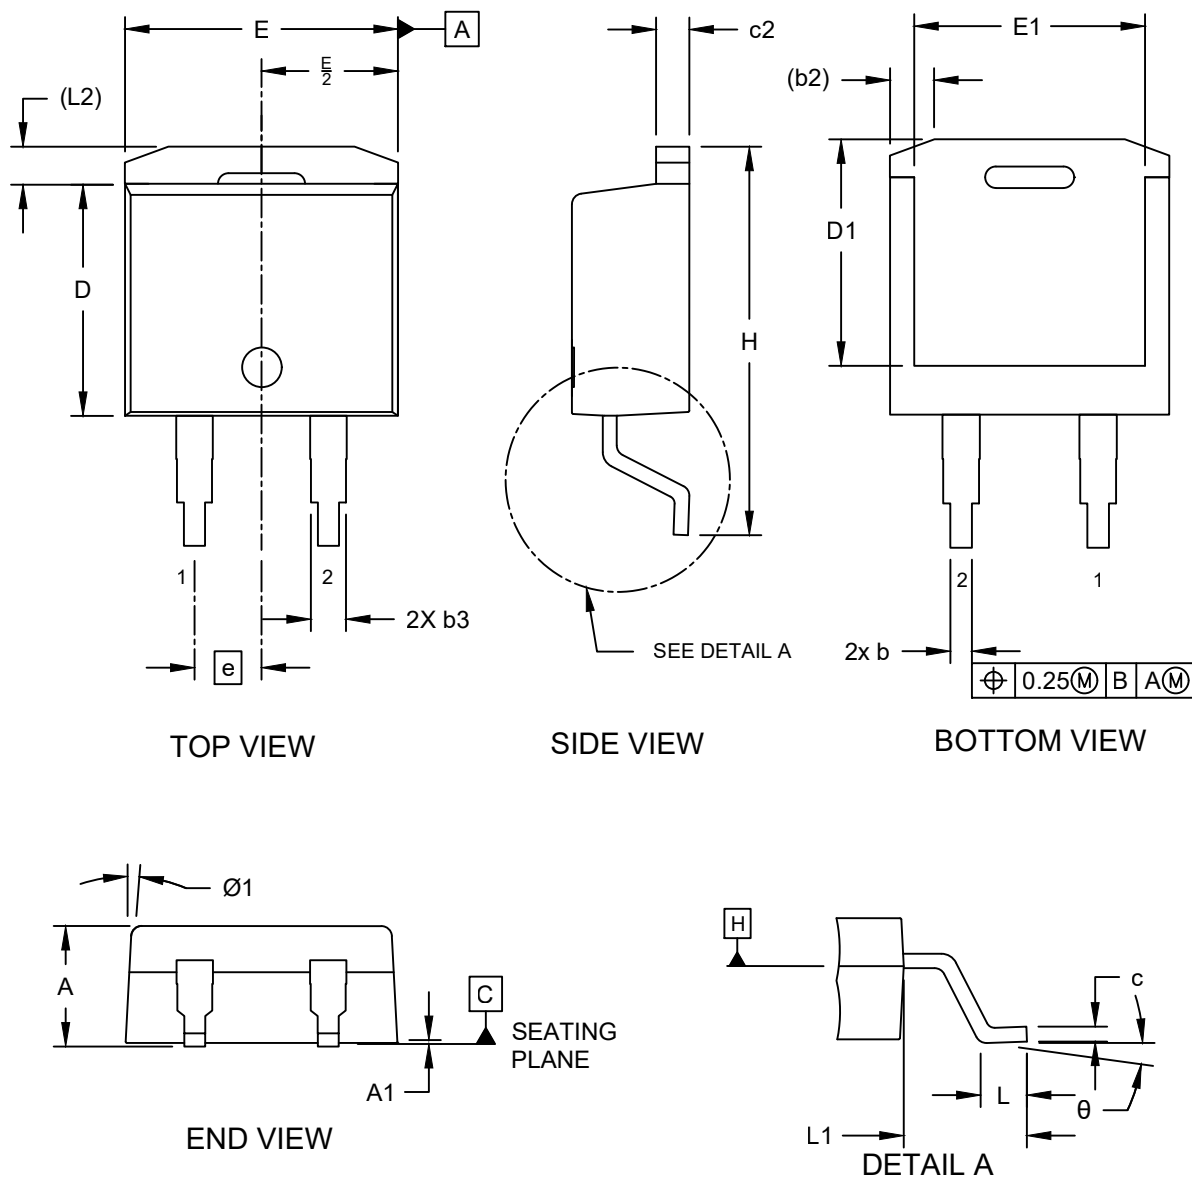

Packaging Diagrams and Parameters

2-Lead Transistor Outline (6FW) - [TO-263]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

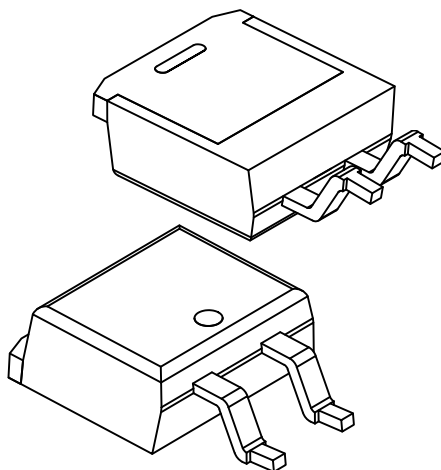

		MILLIMETERS		
Dimension Limits		Min	Nom	Max
Number of Leads	N	2		
Pitch	e	2.54 BSC		
Overall Height	A	4.36	—	4.56
Seating Plane Height	A1	0.00	—	0.25
Lead Width	b	0.70	—	0.90
Thermal Pad Cut Back	b2	1.65 REF		
Lead Width	b3	1.20	—	1.57
Lead Thickness	c	0.38	—	0.69
Thermal Pad Thickness	c2	1.19	—	1.34
Molded Body Length	D	8.60	—	9.00
Thermal Pad Length	D1	6.90	—	7.50
Total Width	E	10.15	—	10.55
Thermal Pad Width	E1	8.10	—	8.70
Overall Length	H	15.00	—	15.60
Foot Length	L	1.90	—	2.50
Lead Length	L1	4.78	—	5.28
Tab Length	L2	1.05	—	1.65
Foot Angle	θ	0°	—	10°
Mold Draft Angle	θ1	0°	—	15°

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. The theoretically exact value is shown without tolerances.

REF: Reference Dimension, usually without tolerance, is for information purposes only.