


Packaging Diagrams and Parameters

144-Ball Low-Profile Fine-Pitch Ball Grid Array Package (6RW) - 10x10x1.5 mm Body [LFBGA] with Heat Sink


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

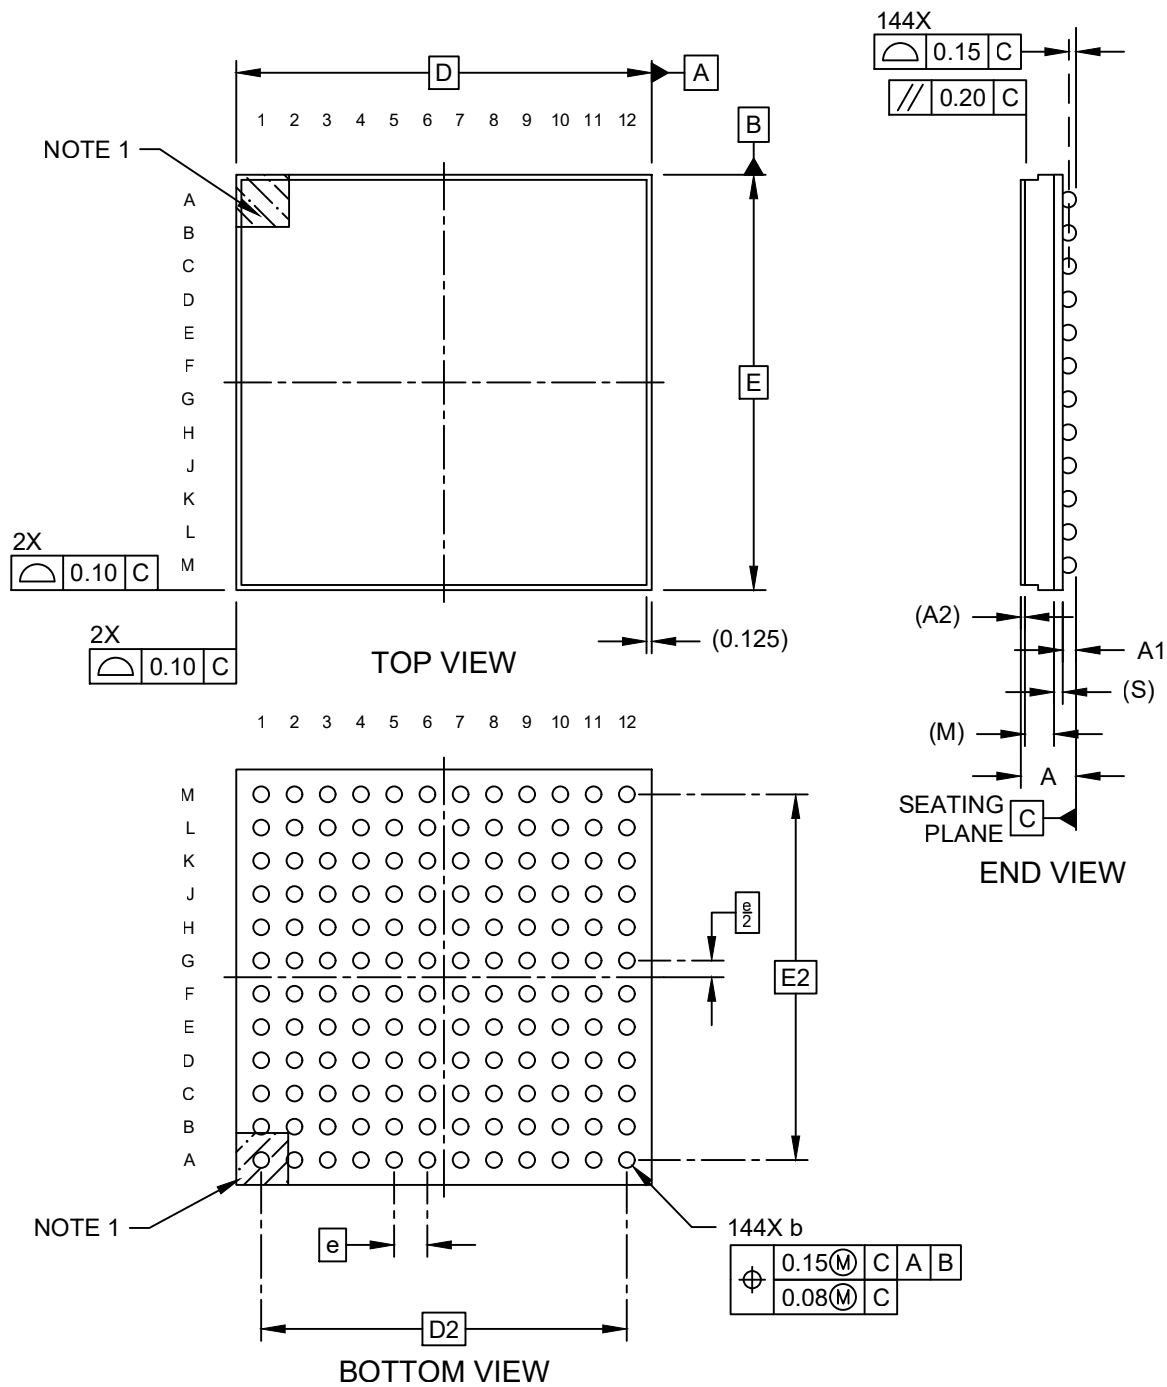

Packaging Diagrams and Parameters

144-Ball Low-Profile Fine-Pitch Ball Grid Array Package (6RW) - 10x10x1.5 mm Body [LFBGA] with Heat Sink

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

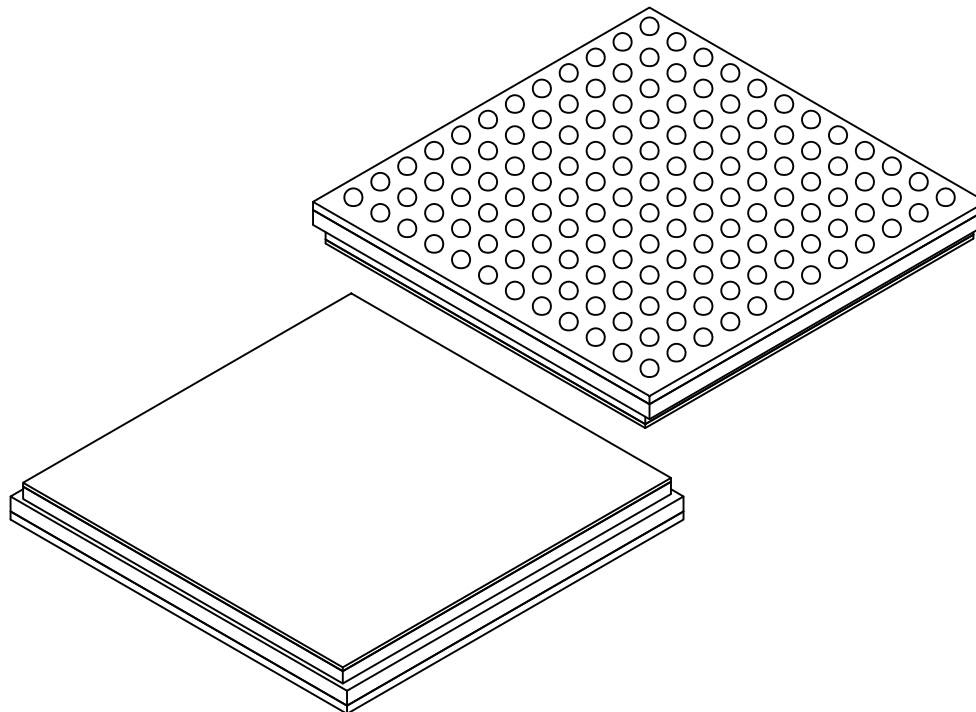

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		144		
Pitch	e		0.80 BSC		
Overall Height	A		–	–	1.500
Ball Height	A1		0.275	–	0.375
Heat Sink Thickness	A2		0.10 REF		
Mold Thickness	M		0.70 REF		
Substrate Thickness	S		0.21 REF		
Overall Length	D		10.00 BSC		
Ball Array Length	D2		8.80 BSC		
Overall Width	E		10.00 BSC		
Ball Array Width	E2		8.80 BSC		
Ball Diameter	b		0.40	–	0.50


Notes:

- Pin 1 visual index feature may vary but must be located within the hatched area.
- Package is saw singulated.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

144-Ball Low-Profile Fine-Pitch Ball Grid Array Package (6RW) - 10x10x1.5 mm Body [LFBGA] with Heat Sink

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

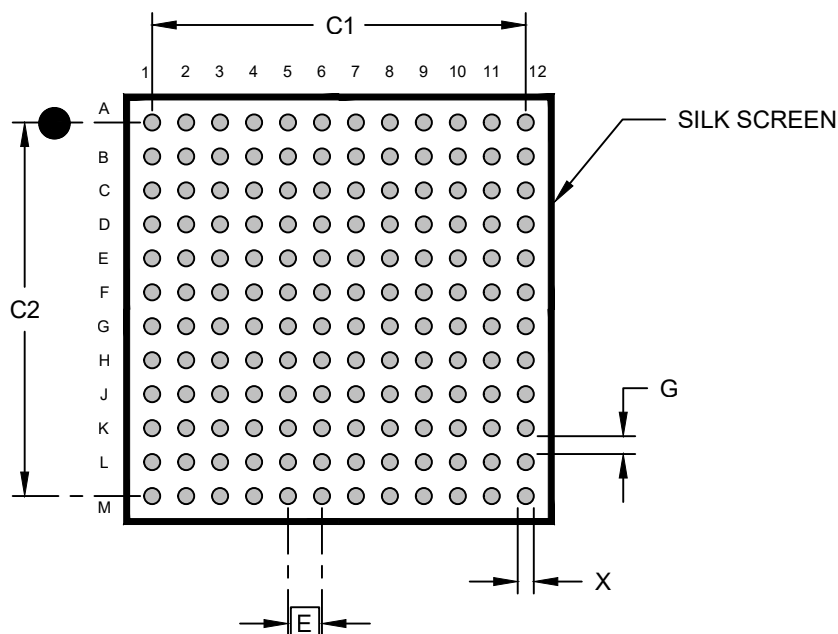

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		8.80	
Contact Pad Spacing	C2		8.80	
Contact Pad Diameter (X144)	X			0.40
Contact Pad to Contact Pad	G	0.40		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, please refer to current industry standard IPC-7093.