


Packaging Diagrams and Parameters

82L-PCB Module (6TW) - 19x25x2.6 mm - [MODULE] with Metal Shield and Coaxial Connector

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

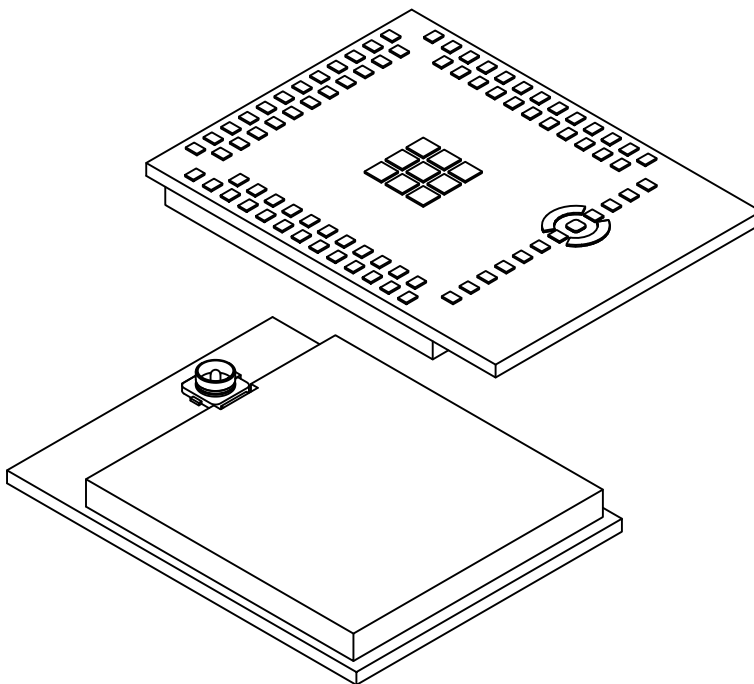

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	82		
Terminal Pitch	e	1.27 BSC		
Overall Height	A	2.40	2.50	2.60
PCB Thickness	A2	0.70	0.80	0.90
Shield Height	A3	1.70 REF		
Coaxial Connector Height	A4	1.25 REF		
Overall Length	D	19.00 BSC		
Overall Width	E	25.00 BSC		
Shield Length	D1	17.85 BSC		
Shield Width	E1	19.14BSC		
Terminal Width	b	0.50	0.60	0.70
Terminal Length	L	0.70	0.80	0.90


Notes:

- All Dimensions are in Millimeters
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

82L-PCB Module (6TW) - 19x25x2.6mm - [MODULE] with Metal Shield and Coaxial Connector

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

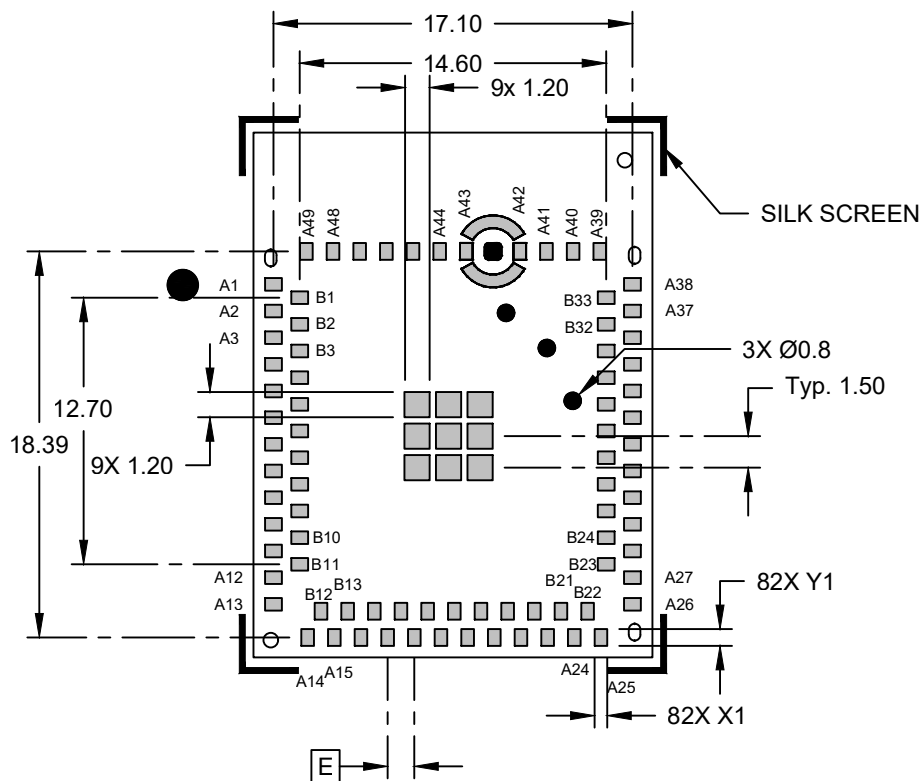

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.27 BSC		
Contact Pad Width (Xnn)	X1			0.60
Contact Pad Length (Xnn)	Y1			0.80

● SMD Pad for Test Point.

○ > Non-plated through holes for shield mounting.

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, please refer to IPC-7093.