


Packaging Diagrams and Parameters

132-Lead Very Thin Plastic Quad Flat, No Lead Package (6ZW) - 10x10x0.9mm Body [VQFN]

Dual Row Terminals; Saw Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

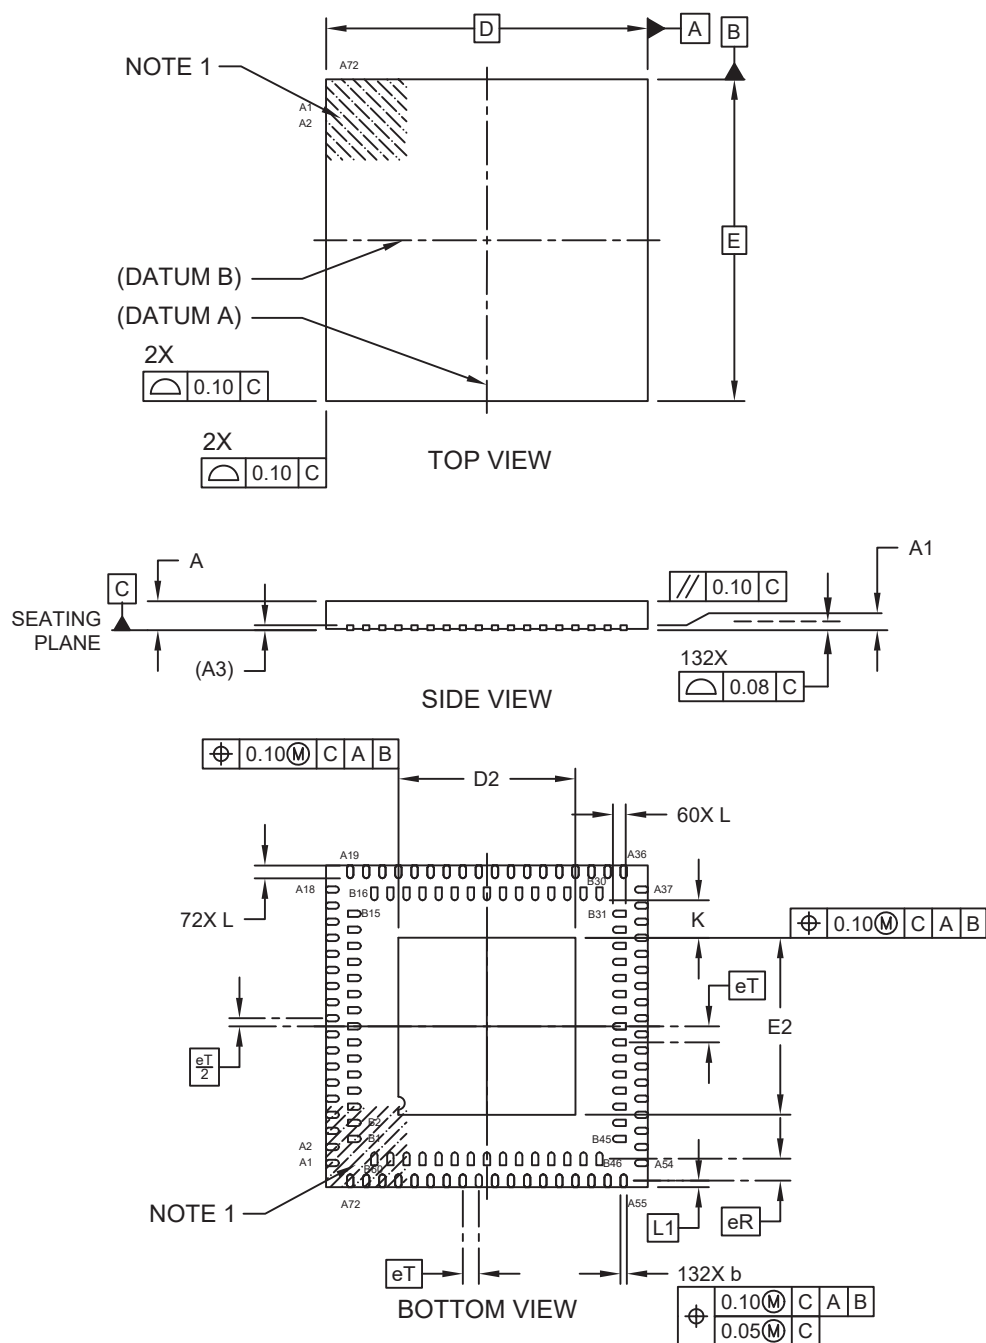


Packaging Diagrams and Parameters

132-Lead Very Thin Plastic Quad Flat, No Lead Package (6ZW) - 10x10x0.9mm Body [VQFN]

Dual Row Terminals; Saw Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

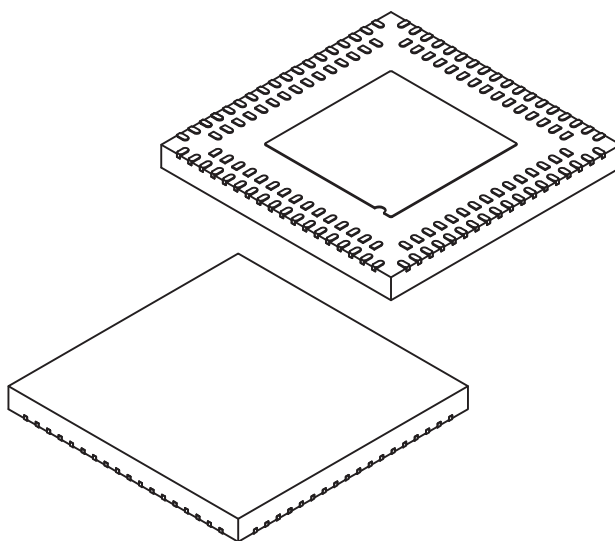

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Number of Terminals	N	132		
Pitch	eT	0.50 BSC		
Outer Row Center to Inner Row Center	eR	0.65 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.035	0.05
Terminal Thickness	A3	0.152 REF		
Overall Length	D	10.00 BSC		
Exposed Pad Length	D2	5.62	5.72	5.82
Overall Width	E	10.00 BSC		
Exposed Pad Width	E2	5.62	5.72	5.82
Terminal Width	b	0.15	0.20	0.25
Terminal Length	L	0.30	0.40	0.50
Inner Row Terminal Length	L2	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K	0.20	—	—

Notes:


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

132-Lead Very Thin Plastic Quad Flat, No Lead Package (6ZW) - 10x10x0.9mm Body [VQFN]

Dual Row Terminals; Saw Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

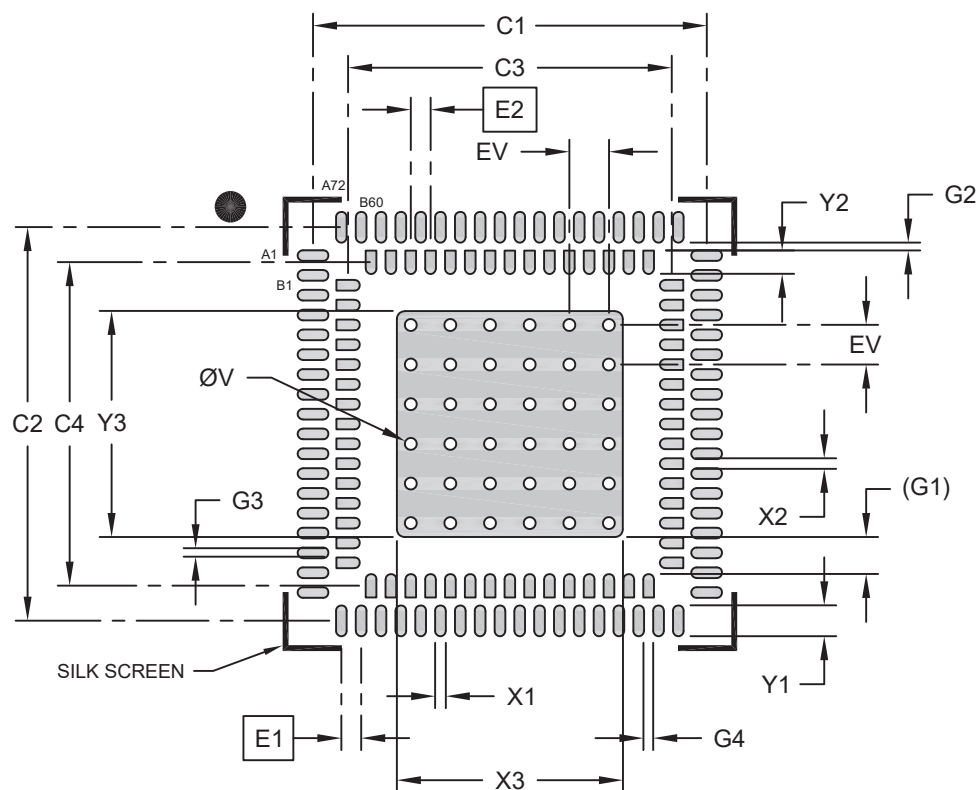

RECOMMENDED LAND PATTERN

Units		MILLIMETERS			Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX	Dimension Limits		MIN	NOM	MAX
Outer Contact Pitch	E1	0.50 BSC			Inner Contact Pad Spacing	C4	8.16		
Inner Contact Pitch	E2	0.50 BSC			Outer Contact Pad Length (X72)	Y1	0.78		
Outer Contact Pad Width (X72)	X1	0.30			Inner Contact Pad Length (X60)	Y2	0.59		
Inner Contact Pad Width (X60)	X2	0.30			Contact Pad to Center Pad (X60)	G1	1.20 REF		
Optional Center Pad Width	X3	5.82			Inner Pad Row to Outer Pad Row	G2	0.20		
Optional Center Pad Length	Y3	5.82			Contact Pad to Contact Pad (X68)	G3	0.20		
Outer Contact Pad Spacing	C1	9.93			Contact Pad to Contact Pad (X56)	G4	0.20		
Outer Contact Pad Spacing	C2	9.93			Thermal Via Diameter	V	0.30		
Inner Contact Pad Spacing	C3	8.16			Thermal Via Pitch	EV	1.00		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, please refer to current industry standard IPC-7093.