


Packaging Diagrams and Parameters

22-Lead Quadruple Decawatt Package-EP, ILF, FT (7UW) 15x15.4x2.3mm Body [QDPAK]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

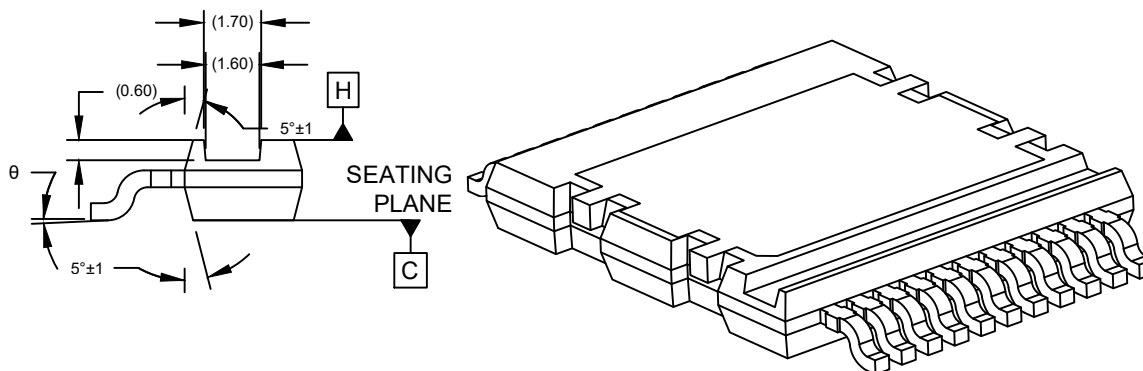

DETAIL B

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Number of Terminals	N	22		
Pitch	e	1.14 BSC		
Overall Height	A	2.20	2.30	2.35
Standoff	A1	0.00	-	0.15
Molded Package Edge to Terminal	A2	-	0.90	-
Overall Length	D	14.90	15.00	15.10
Overall Width	E	20.81	20.96	21.11
Molded Package Width	E1	15.30	15.40	15.50
Terminal Width	b	0.59	0.60	0.61
Terminal Thickness	c	0.50 REF		
Terminal Length	L	-	1.30	-
Footprint	L1	2.78 REF		
Foot Angle	θ	0°	-	8°


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

22-Lead Quadruple Decawatt Package-EP, ILF, FT (7UW) 15x15.4x2.3mm Body [QDPAK]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

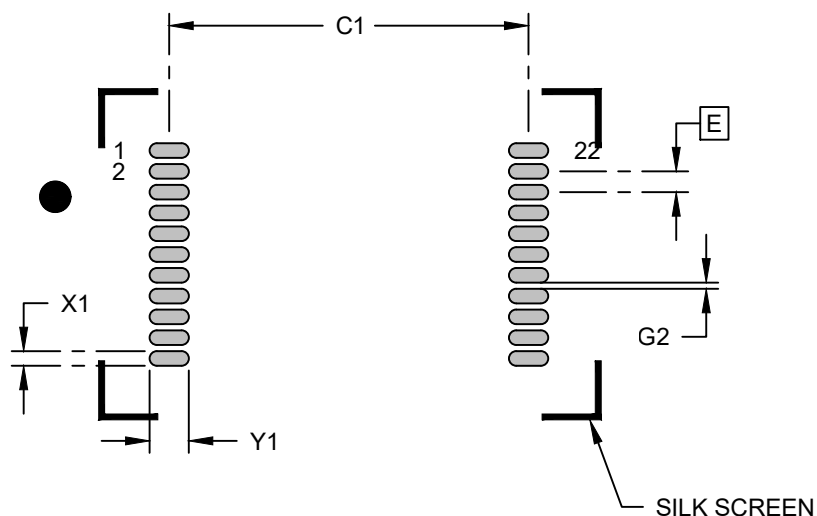

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.14 BSC		
Contact Pad Spacing	C1		19.70	
Contact Pad Width (X22)	X1			0.80
Contact Pad Length (X22)	Y1			2.15
Contact Pad to Contact Pad (X20)	G2	0.34		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, please refer to current industry standard IPC-7093.

Microchip Technology Drawing C04-02650 Rev A