




Packaging Diagrams and Parameters

17-Lead Low-Profile Land Grid Array (8EW) 3.3x3.3x1.62mm [LLGA] - System In Package [SIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

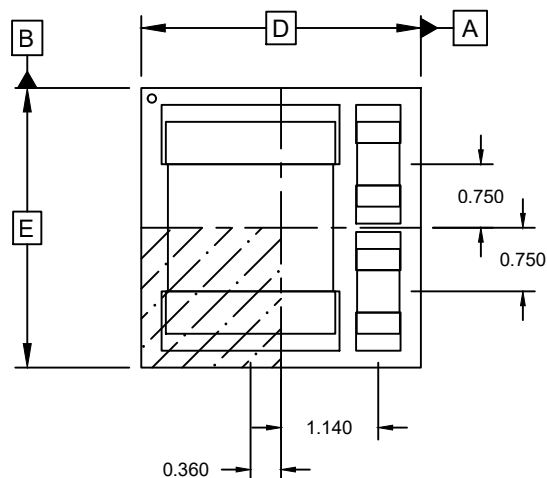

TOP VIEW

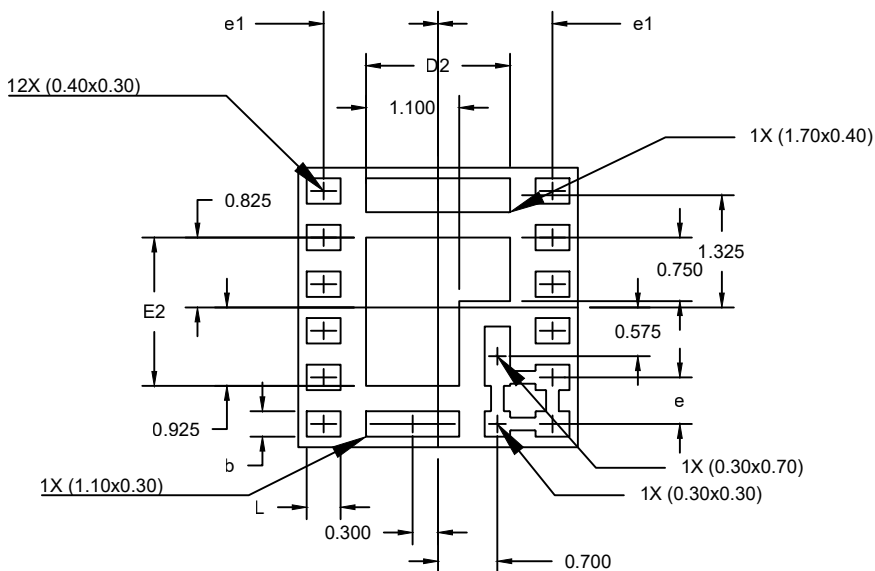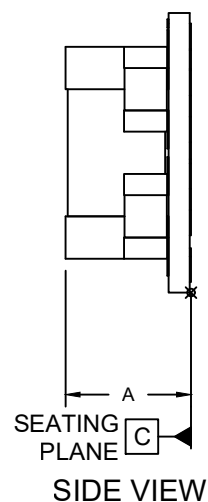


BOTTOM VIEW

Packaging Diagrams and Parameters

17-Lead Low-Profile Land Grid Array (8EW) 3.3x3.3x1.62mm [LLGA] - System In Package [SIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

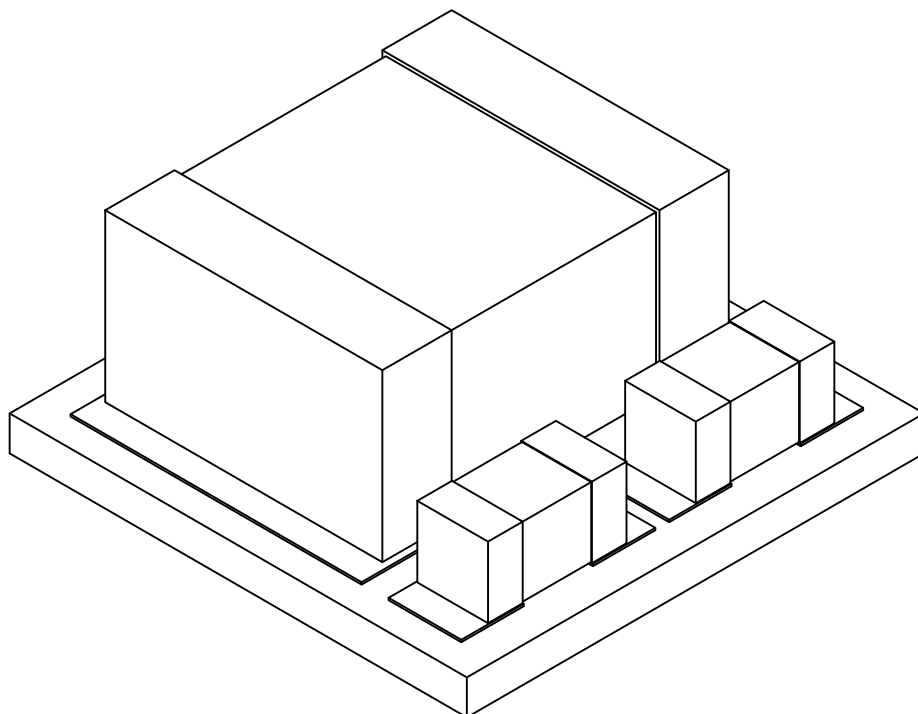

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Number of Terminals	N	17		
Pitch	e	0.55 BSC		
Pitch	e1	1.35 BSC		
Overall Height	A	1.32	1.47	1.62
Overall Length	D	3.30 BSC		
Exposed Pad Length	D2	1.60	1.70	1.80
Overall Width	E	3.30 BSC		
Exposed Pad Width	E2	1.65	1.75	1.85
Terminal Width	b	0.20	0.30	0.40
Terminal Length	L	0.30	0.40	0.50


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

17-Lead Low-Profile Land Grid Array (8EW) 3.3x3.3x1.62mm [LLGA] - System In Package [SIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

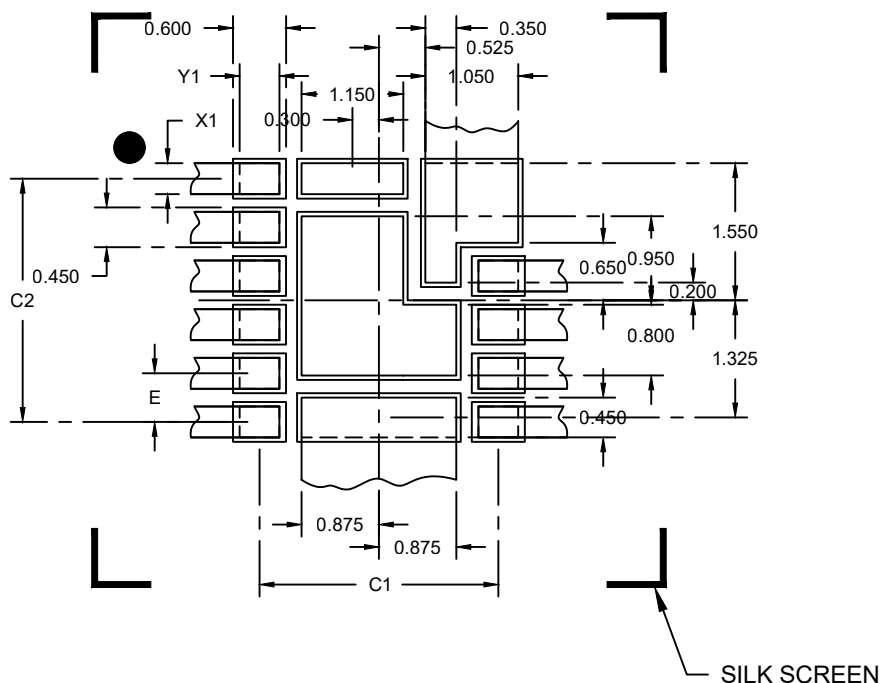

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.55 BSC		
Contact Pad Spacing	C1		2.70	
Contact Pad Spacing	C2		2.75	
Contact Pad Width (X10)	X1			0.35
Contact Pad Length (X10)	Y1			0.45

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, please refer to current industry standard IPC-7093.