


Packaging Diagrams and Parameters

22-Lead Land Grid Array 5.8x4.9x1.71mm (8FW) [LGA] - System in Package [SIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

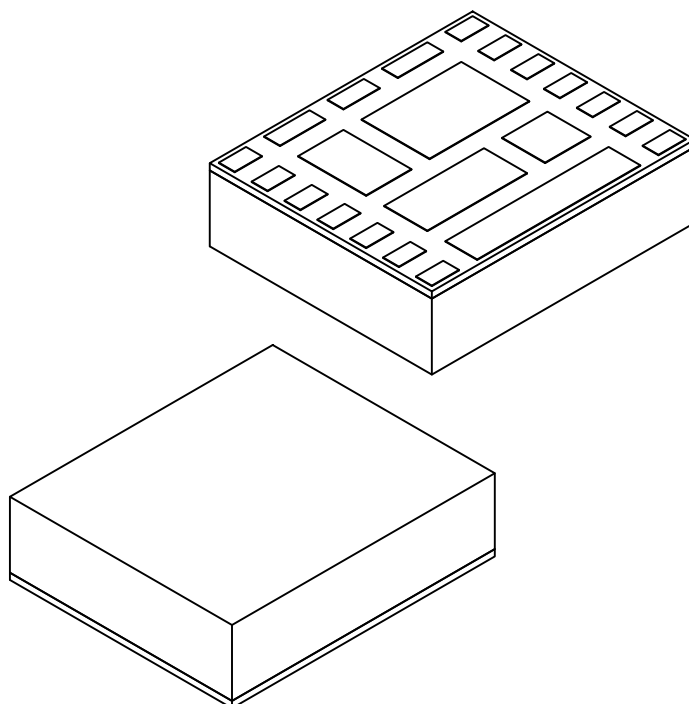

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		22		
Pitch	e		0.725 BSC		
Pitch	e1		1.300 BSC		
Overall Height	A		1.41	1.56	1.71
Overall Length	D		4.90 BSC		
Lead Pad Length Pitch	D1		4.35 REF		
Overall Width	E		5.80 BSC		
Lead Pad Width Pitch	E1		5.00 REF		
Terminal Width	b		0.30	0.35	0.40
Terminal Length	L		0.55	0.60	0.65


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerances, for information purposes only.

Land Pattern

22-Lead Land Grid Array 5.8x4.9x1.71mm (8FW) [LGA] - System in Package [SIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

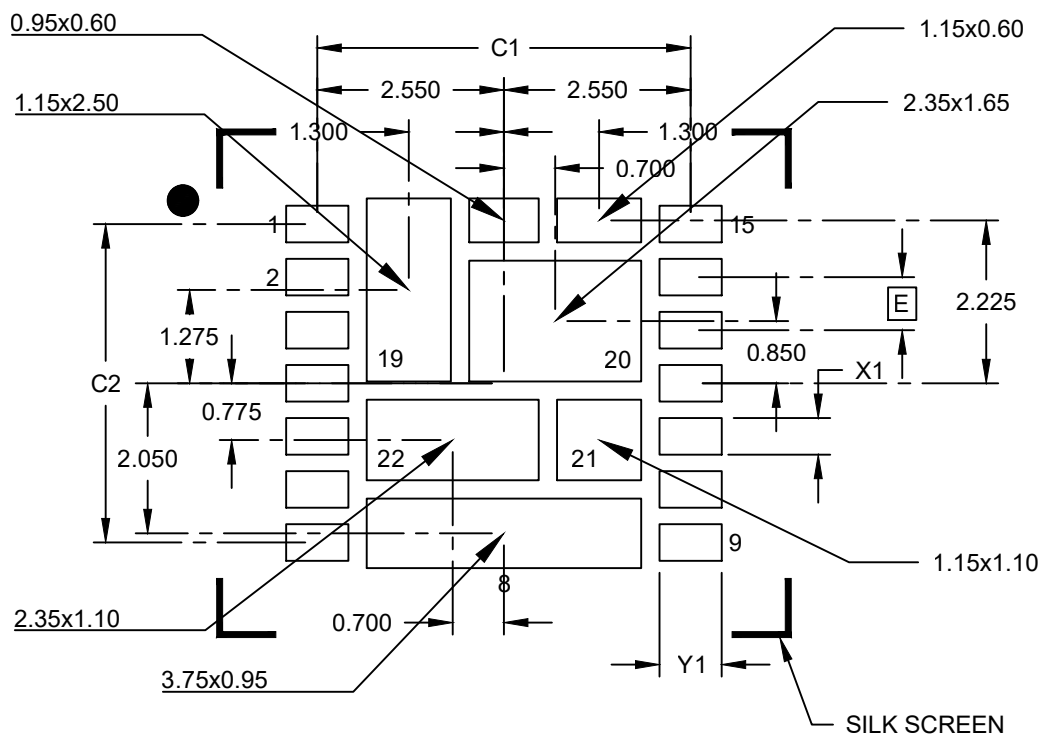

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.725 BSC		
Contact Pad Spacing	C1		5.10	
Contact Pad Spacing	C2		4.35	
Contact Pad Width (X14)	X1			0.50
Contact Pad Length (X14)	Y1			0.85

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, please refer to current industry standard IPC-7093.