


Packaging Diagrams and Parameters

8-Lead Thin Dual Flatpack No-Lead (8HW) 2x2x0.8mm Body [TDFN] With Chip On Lead


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

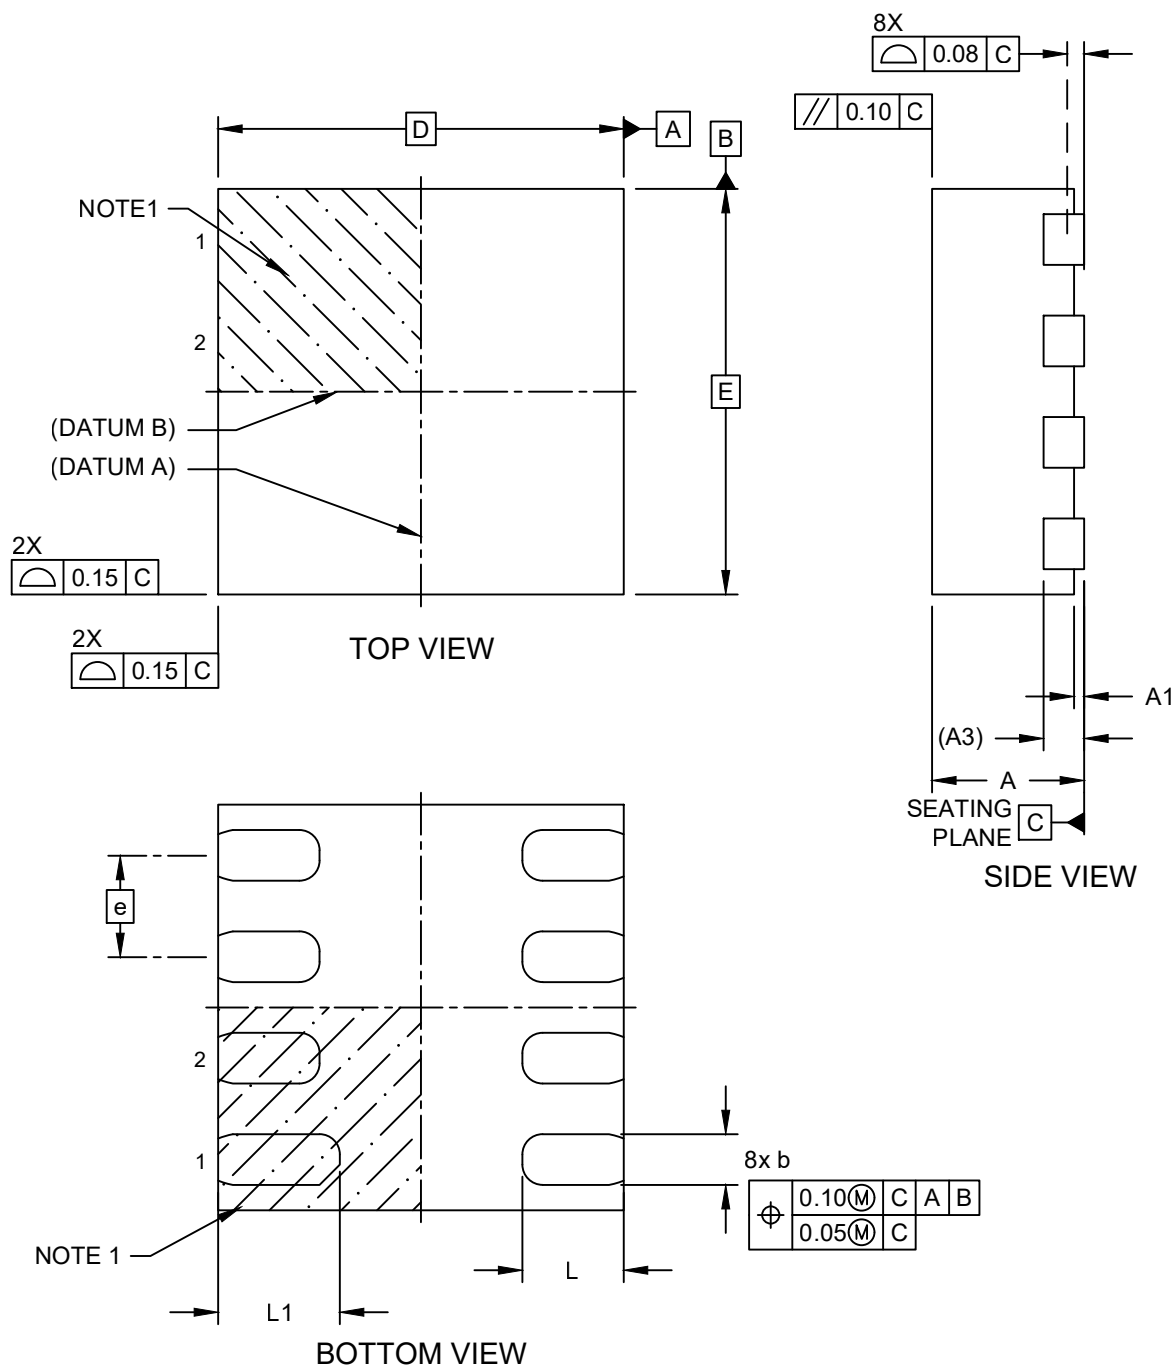

Packaging Diagrams and Parameters

8-Lead Thin Dual Flatpack No-Lead (8HW) 2x2x0.8mm Body [TDFN] With Chip On Lead

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

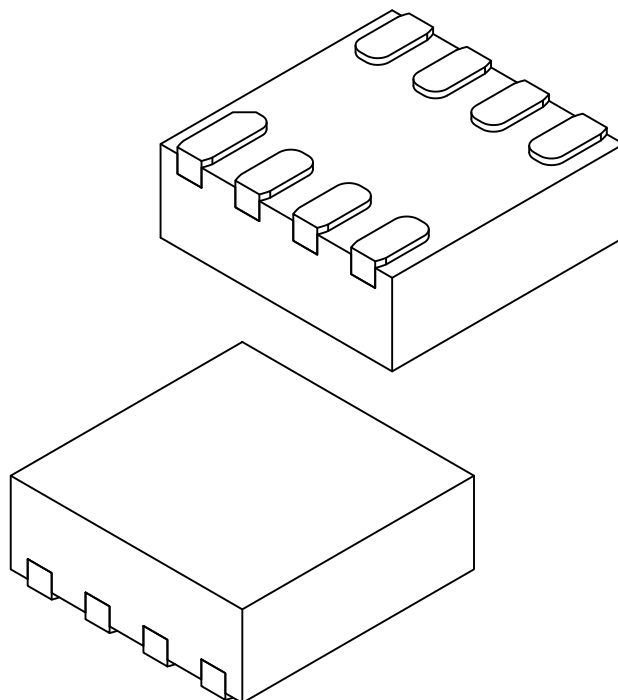

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Number of Terminals	N	8		
Pitch	e	0.50 BSC		
Overall Height	A	0.70	0.75	0.80
Standoff	A1	0.00	-	0.05
Terminal Thickness	A3	0.20 REF		
Overall Length	D	2.00 BSC		
Overall Width	E	2.00 BSC		
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.45	0.50	0.55
Pin 1 Terminal Length	L1	0.55	0.60	0.65


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

8-Lead Thin Dual Flatpack No-Lead (8HW) 2x2x0.8mm Body [TDFN] With Chip On Lead

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

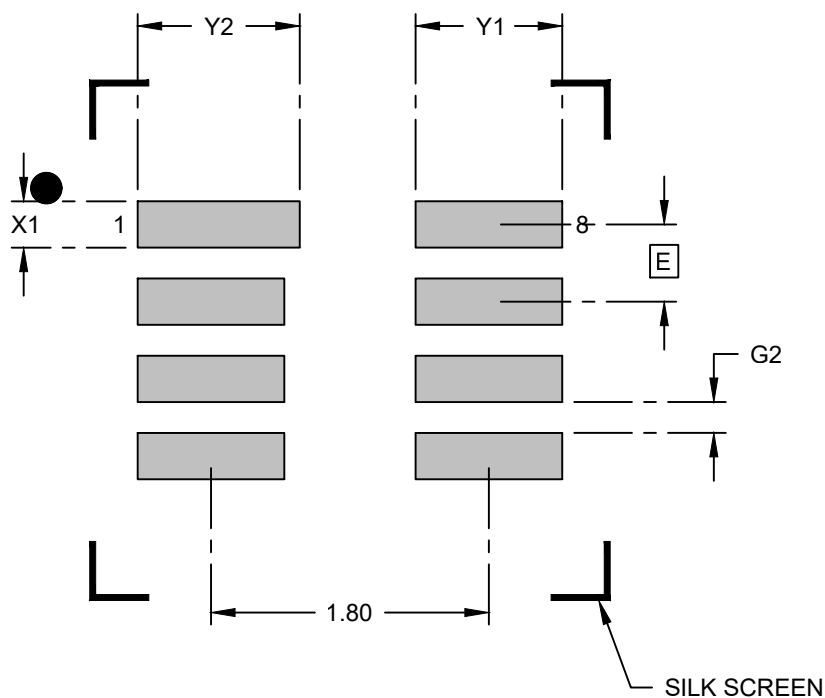

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Contact Pad Spacing	C		1.80	
Contact Pad Width (X8)	X1			0.30
Contact Pad Length (X7)	Y1			0.95
Pin 1 Contact Pad Length (X1)	Y2			0.95
Contact Pad to Contact Pad (X6)	G2	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, please refer to current industry standard IPC-7093.