


Packaging Diagrams and Parameters

8-Lead Very-Thin Dual Flatpack No-Lead - (8JW) 1.4x1.6x0.9mm [VDFN]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

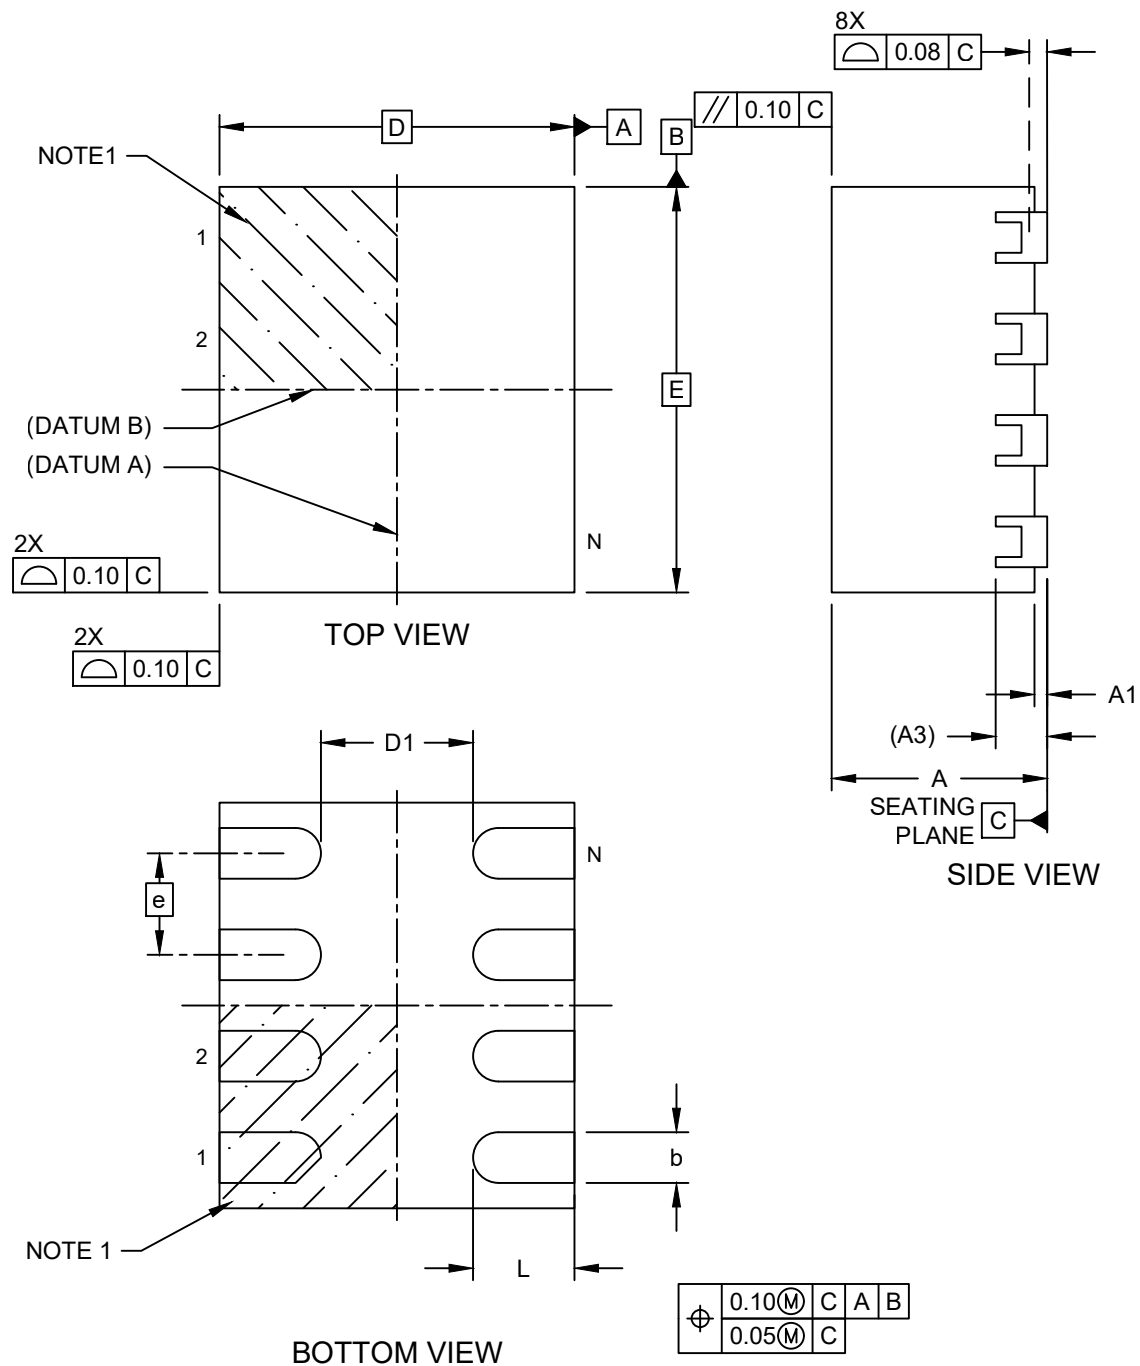

Packaging Diagrams and Parameters

8-Lead Very-Thin Dual Flatpack No-Lead - (8JW) 1.4x1.6x0.9mm [VDFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

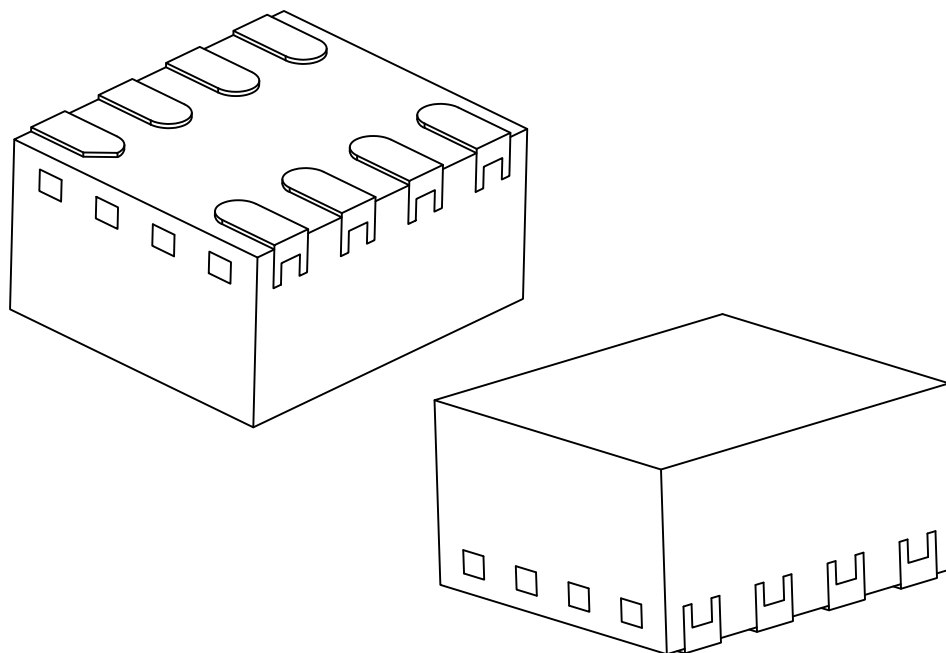

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Number of Terminals	N	8		
Pitch	e	0.40 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	-	0.05
Terminal Thickness	A3	2.03 REF		
Overall Width	D	1.40 BSC		
Pad to Pad Width	D1	0.60 REF		
Overall Length	E	1.60 BSC		
Terminal Width	b	0.15	0.20	0.25
Terminal Length	L	0.30	0.40	0.50


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
REF: Reference Dimension, usually without tolerances, is for information purposes only.

Land Pattern

8-Lead Very-Thin Dual Flatpack No-Lead - (8JW) 1.4x1.6x0.9mm [VDFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

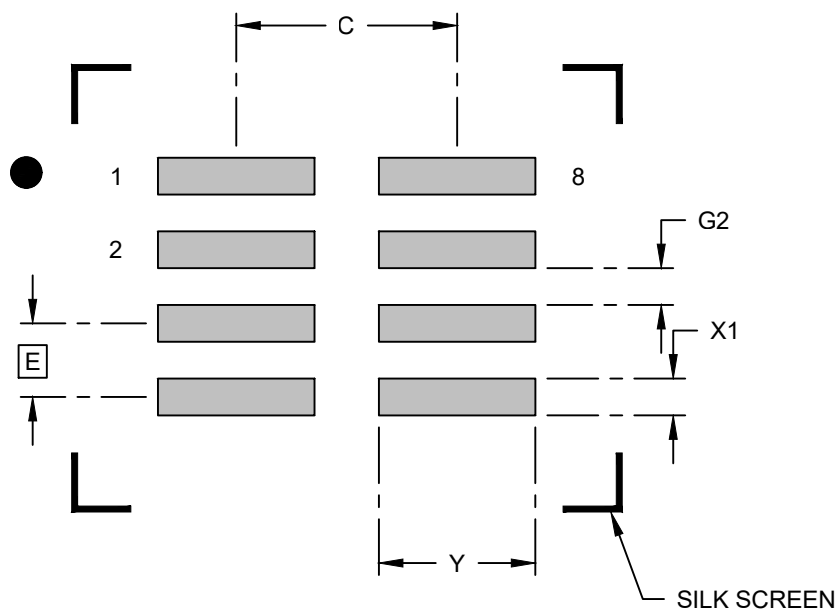

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.40 BSC		
Contact Pad Spacing	C		1.20	
Contact Pad Width (X8)	X1			0.20
Contact Pad Length (X8)	Y1			0.85
Contact Pad to Contact Pad (X6)	G2	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
- For best soldering results, please refer to the current industry standard IPC-7093.