


Packaging Diagrams and Parameters

3727-Ball Heat Spreader Ball Grid Array - No ThruHole - (8LW) 52.5x52.5x4.048mm [HBGA] Staggered Array


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

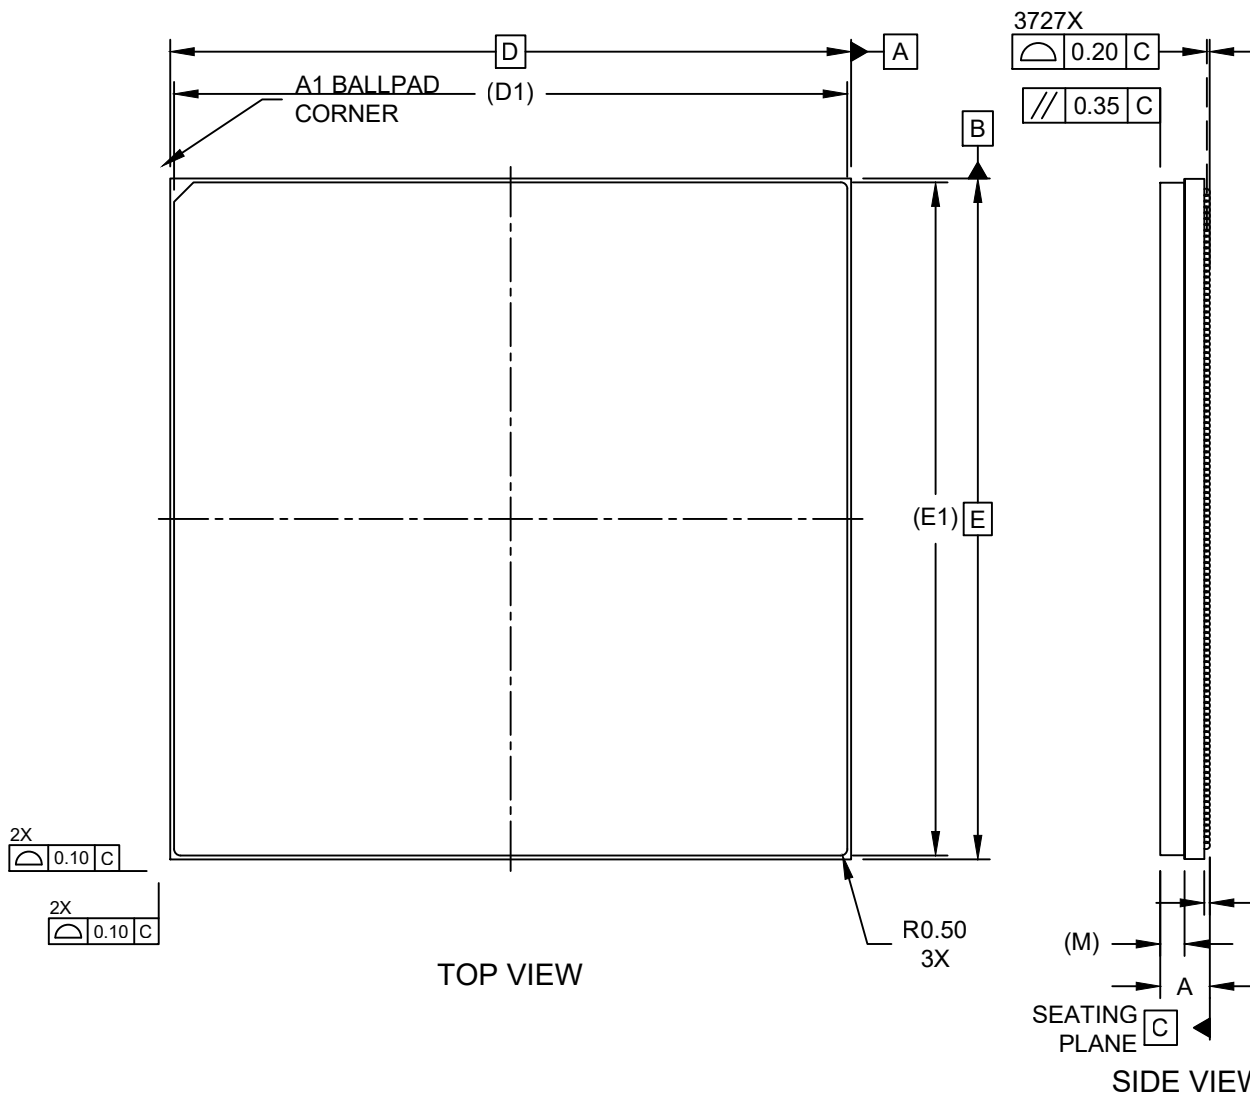

Packaging Diagrams and Parameters

3727-Ball Heat Spreader Ball Grid Array - No ThruHole - (8LW) 52.5x52.5x4.048mm [HBGA] Staggered Array

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

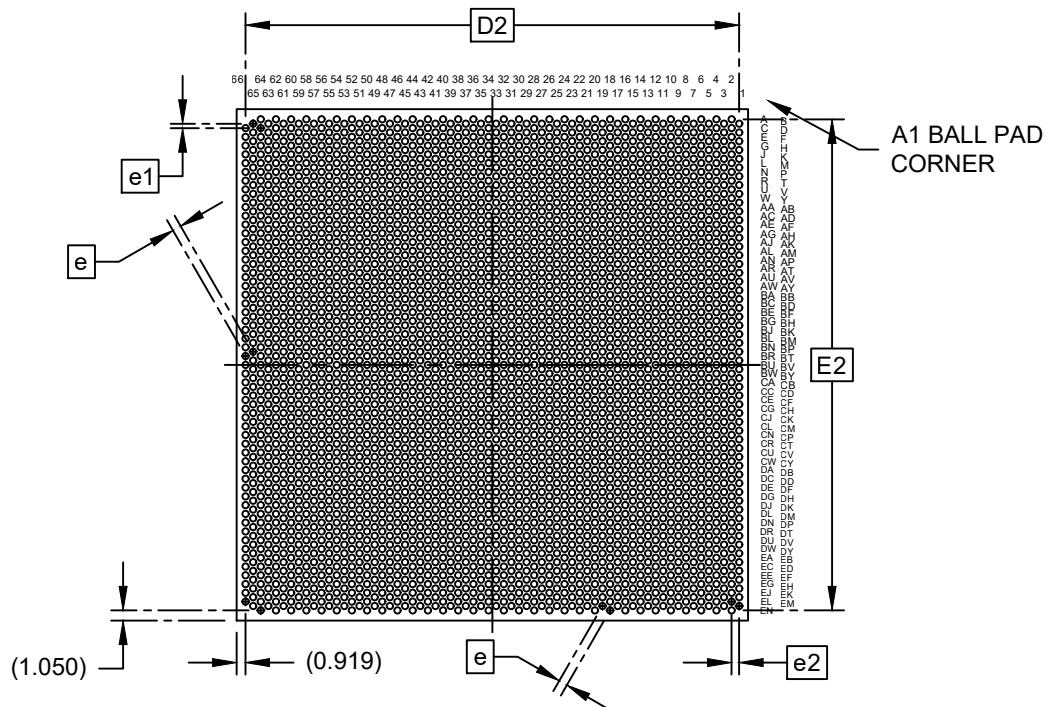

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N			3727	
Pitch	e			0.90 BSC	
Pitch	e1			0.45 BSC	
Pitch	e2			0.78 BSC	
Overall Height	A		3.564	3.758	4.048
Ball Height	A1		0.300	0.430	—
Lid Thickness	M			1.96 REF	
Overall Length	D			52.50 BSC	
Heat Sink Length	D1			51.90 REF	
Ball Array Length	D2			50.66 BSC	
Overall Width	E			52.50 BSC	
Heat Sink Width	E1			51.90 REF	
Ball Array Width	E2			50.40 BSC	
Ball Diameter	b		0.53	0.58	0.63


Notes:

- The Pin 1 visual index feature may vary, but it must be located within the hatched area.
- The package is saw singulated.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, is for information purposes only.

Land Pattern

3727-Ball Heat Spreader Ball Grid Array - No ThruHole - (8LW) 52.5x52.5x4.048mm [HBGA] Staggered Array

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

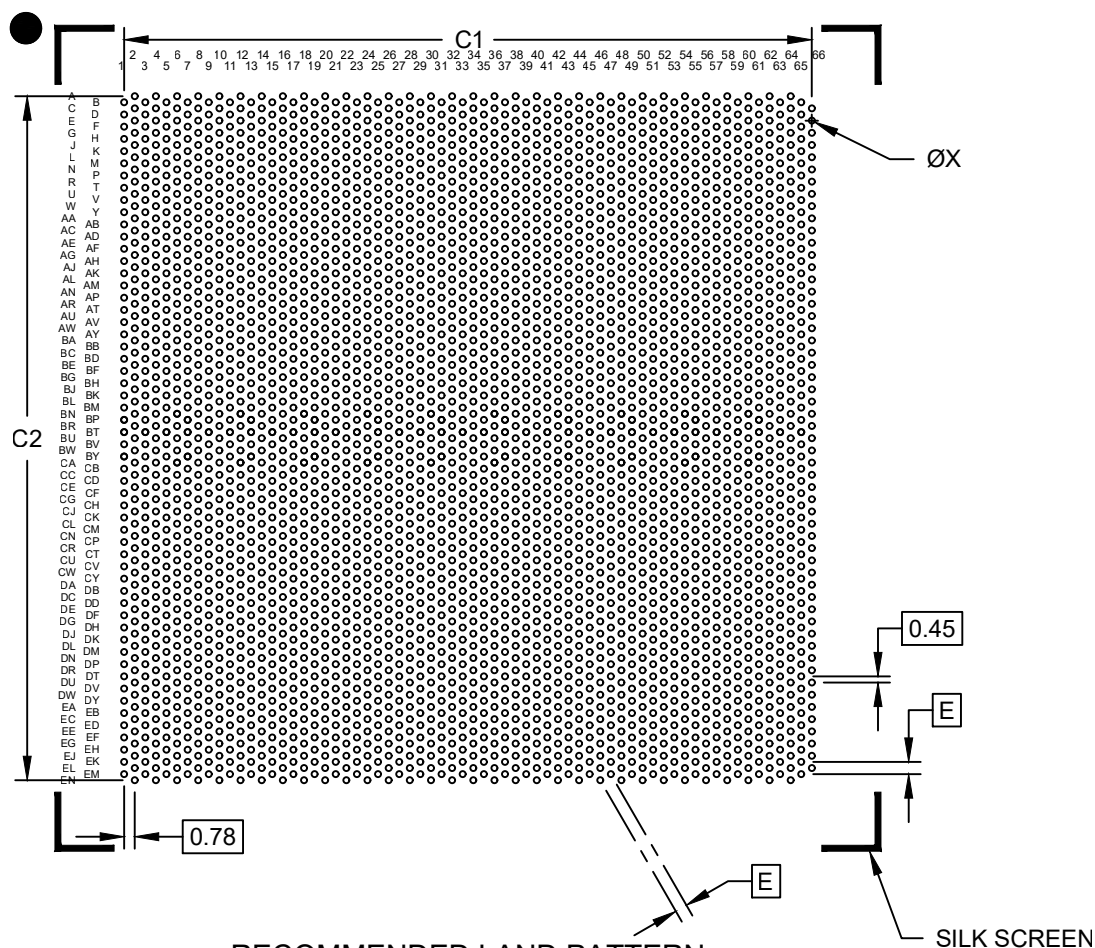

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.90 BSC	
Contact Pad Spacing	C1		50.66	
Contact Pad Spacing	C2		50.40	
Contact Pad Diameter (X3727)	X			0.44
Contact Pad to Contact Pad	G2	0.46		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
- For best soldering results, please refer to the current industry standard IPC-7093.