


Packaging Diagrams and Parameters

64-Lead Very-Thin Quad Flatpack No-Lead Package (8QW) - 9x9x0.927 mm Body [VQFN] With 3 Exposed Pads and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

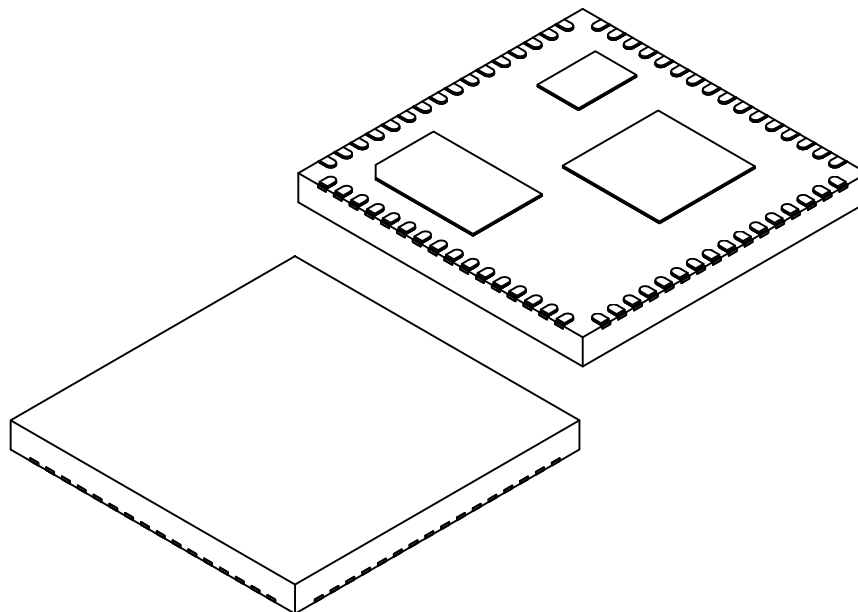

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	64		
Pitch	e	0.50 BSC		
Overall Height	A	0.827	0.877	0.927
Standoff	A1	0.00	-	0.05
Terminal Thickness	A3	0.127 REF		
Overall Length	D	9.00 BSC		
Overall Width	E	9.00 BSC		
Exposed Pad 1 Length	D1	2.08	2.18	2.28
Exposed Pad 1 Width	E1	3.33	3.43	3.53
Exposed Pad 2 Length	D2	2.92	3.02	3.12
Exposed Pad 2 Width	E2	2.96	3.06	3.16
Exposed Pad 3 Length	D3	1.73	1.83	1.93
Exposed Pad 3 Width	E3	1.20	1.30	1.40
Terminal Width	b	0.175	0.25	0.30
Terminal Length	L	0.30	0.40	0.50
Wettable Flank Step Cut Width	E4	0.01	0.05	0.09
Wettable Flank Step Cut Depth	A4	0.03	-	-


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
REF: Reference Dimension, usually without tolerance, is for information purposes only.

Land Pattern

64-Lead Very-Thin Quad Flatpack No-Lead Package (8QW) - 9x9x0.927 mm Body [VQFN] With 3 Exposed Pads and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

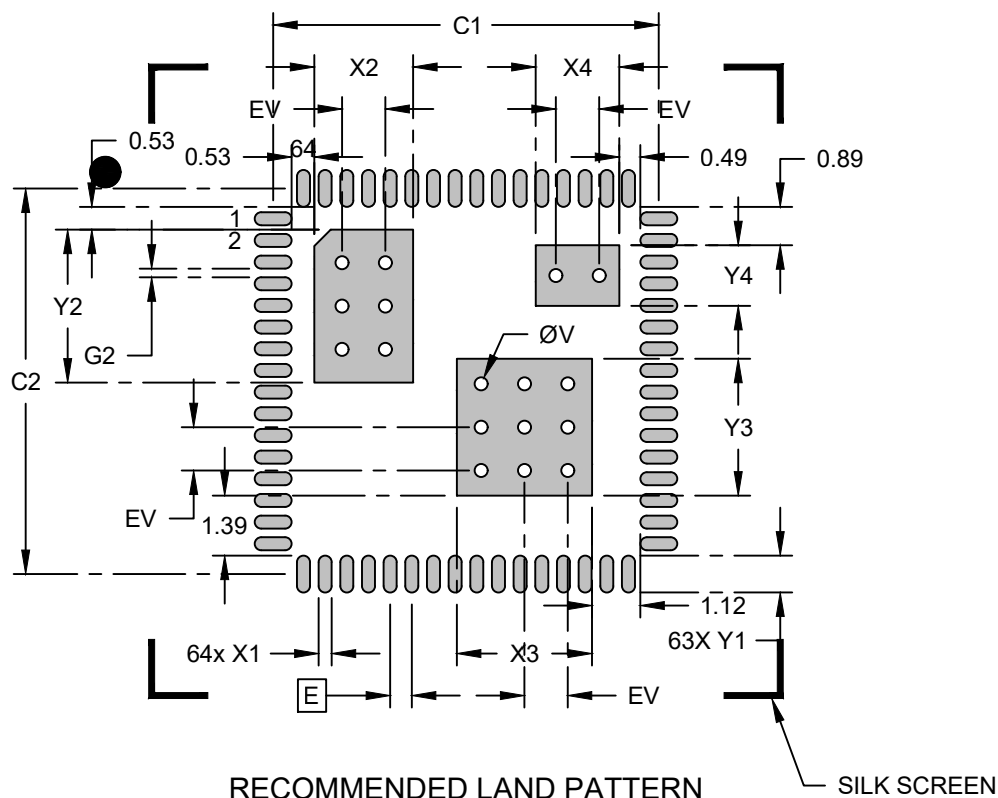

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1		8.90	
Contact Pad Spacing	C2		8.90	
Contact Pad Width (X64)	X1			0.30
Contact Pad Length (X64)	Y1			0.85
Contact Pad to Contact Pad (X60)	G2	0.20		
Thermal Via Diameter	V		1.00	
Thermal Via Pitch	EV		0.30	

Units		MM
Dimension Limits		MAX
Center Pad 1 Width	X2	2.28
Center Pad 1 Length	Y2	3.53
Center Pad 2 Width	X3	3.12
Center Pad 2 Length	Y3	3.16
Center Pad 3 Width	X4	1.93
Center Pad 3 Length	Y4	1.40

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
- For best soldering results, please refer to the current industry standard IPC-7093.