


Packaging Diagrams and Parameters

340-Ball Thin-Profile Fine-Pitch Ball Grid Array (8RW) 9x9x1.2mm [TFBGA]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

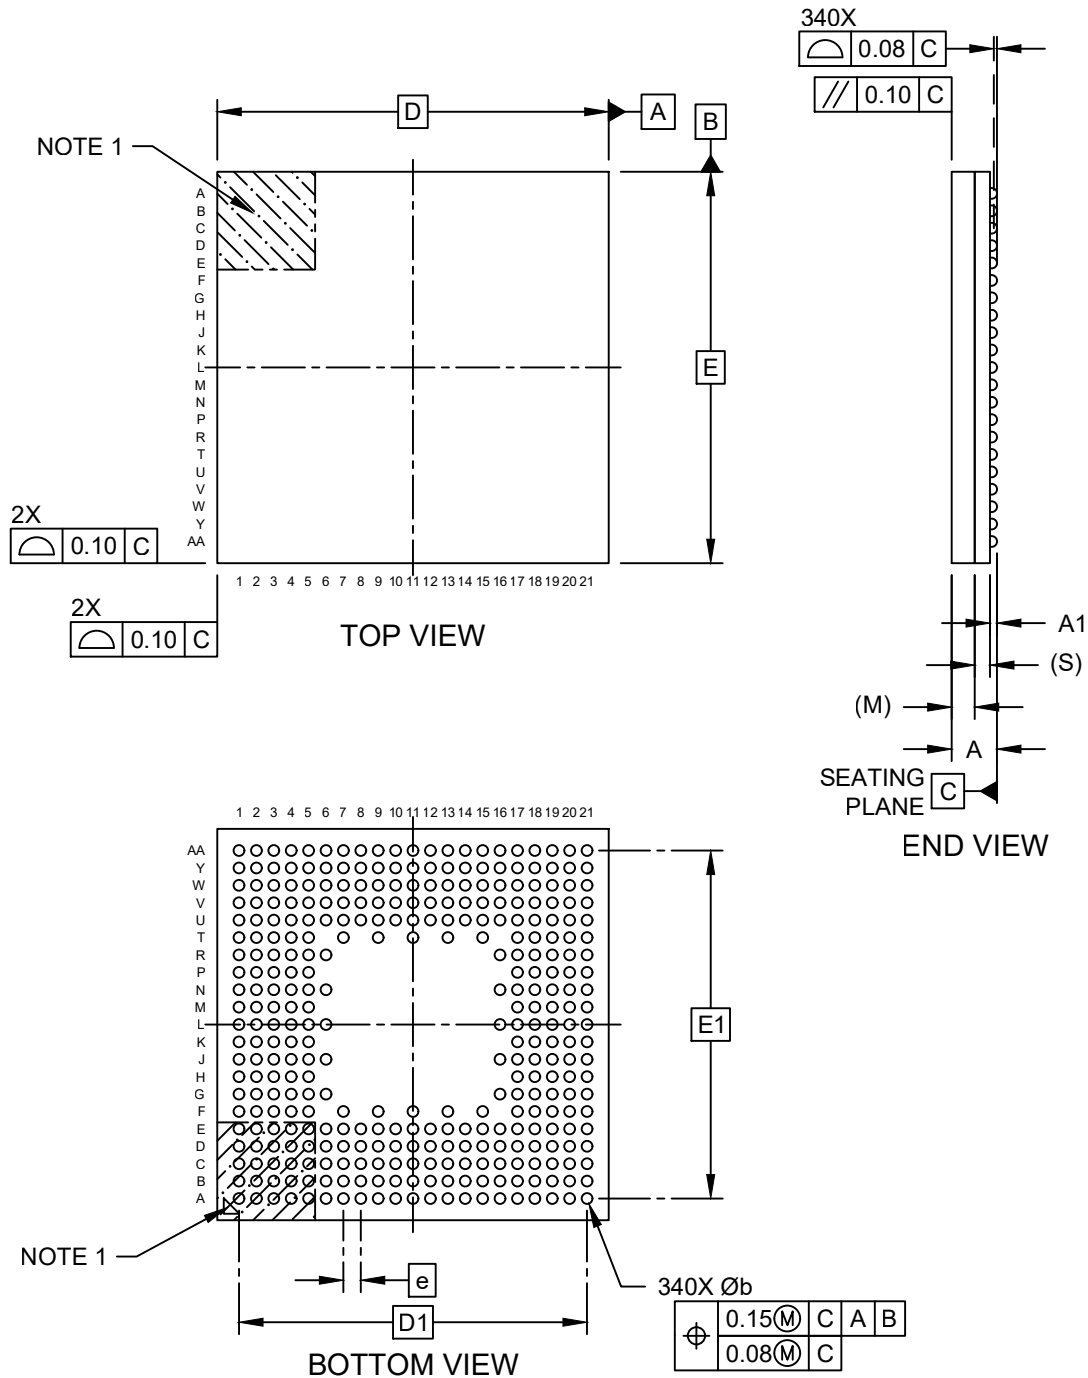

Packaging Diagrams and Parameters

340-Ball Thin-Profile Fine-Pitch Ball Grid Array (8RW) 9x9x1.2mm [TFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

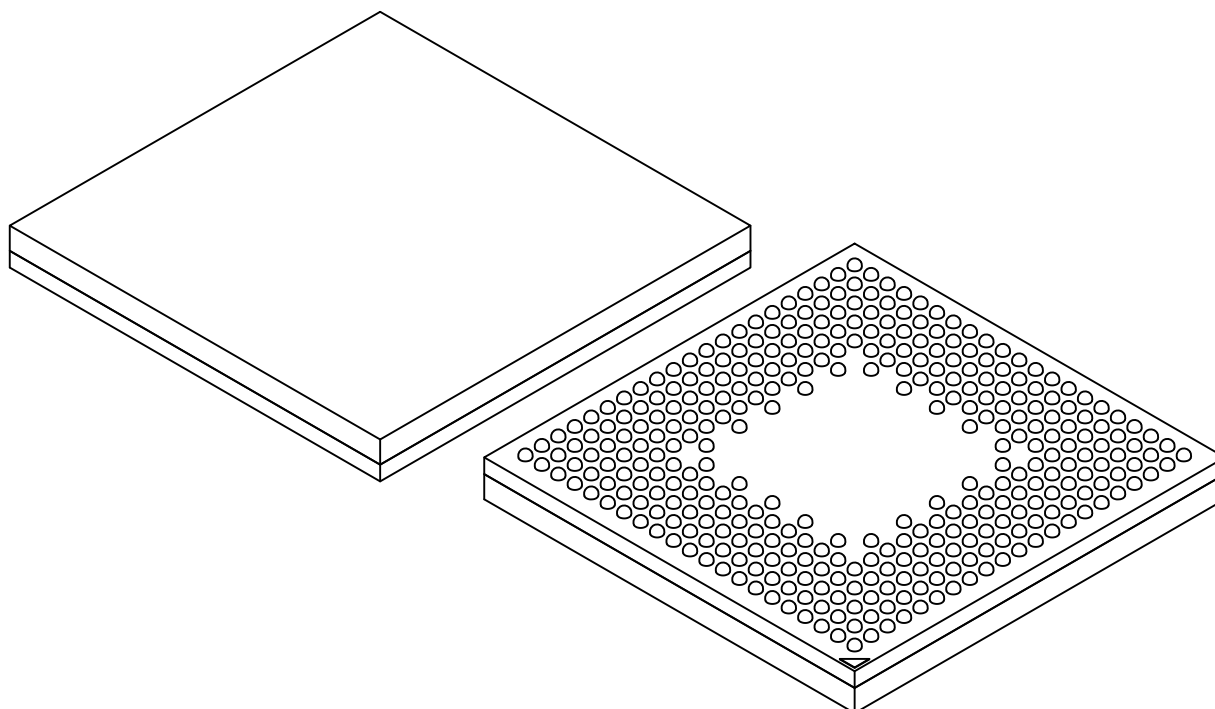

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	340		
Pitch	e	0.40 BSC		
Overall Height	A	1.00	1.10	1.20
Ball Height	A1	0.11	0.16	0.21
Mold Thickness	M	0.530 REF		
Substrate Thickness	S	0.352 REF		
Overall Length	D	9.00 BSC		
Ball Array Length	D2	8.00 BSC		
Overall Width	E	9.00 BSC		
Ball Array Width	E2	8.00 BSC		
Ball Diameter	b	0.20	0.25	0.30


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

340-Ball Thin-Profile Fine-Pitch Ball Grid Array (8RW) 9x9x1.2mm [TFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

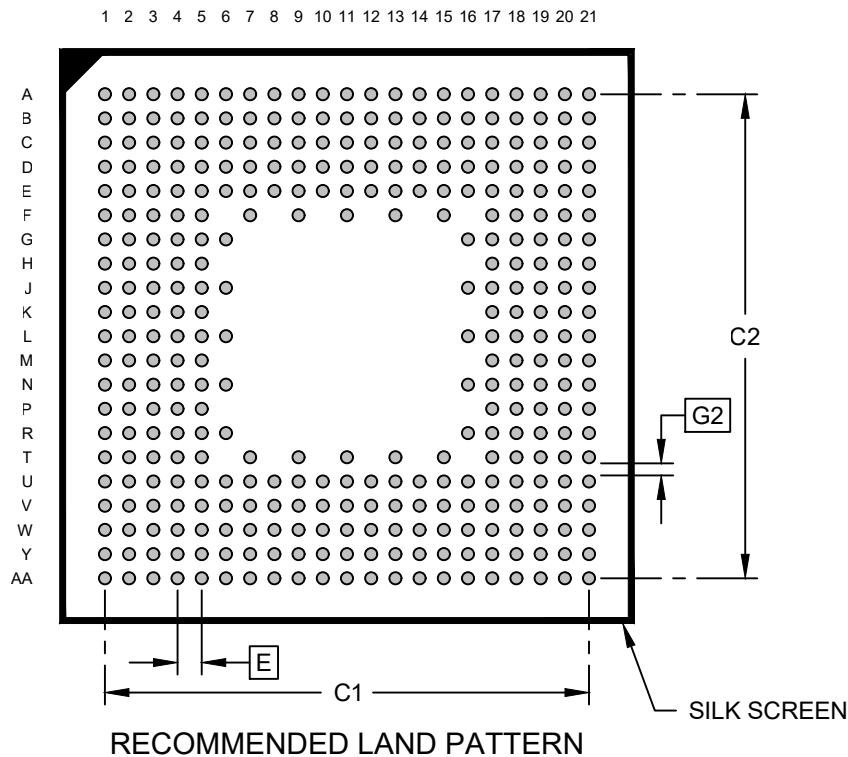

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.40 BSC		
Contact Pad Spacing	C1		8.00	
Contact Pad Spacing	C2		8.00	
Contact Pad Diameter (X340)	X			0.20
Contact Pad to Contact Pad	G2	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, please refer to current industry standard IPC-7093.