


Packaging Diagrams and Parameters

8-Lead Transistor Outline Lead Less (8UW) - 9.90x11.68x2.40mm [TOLL] With Exposed 8.3x7.15mm Heat Sink


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

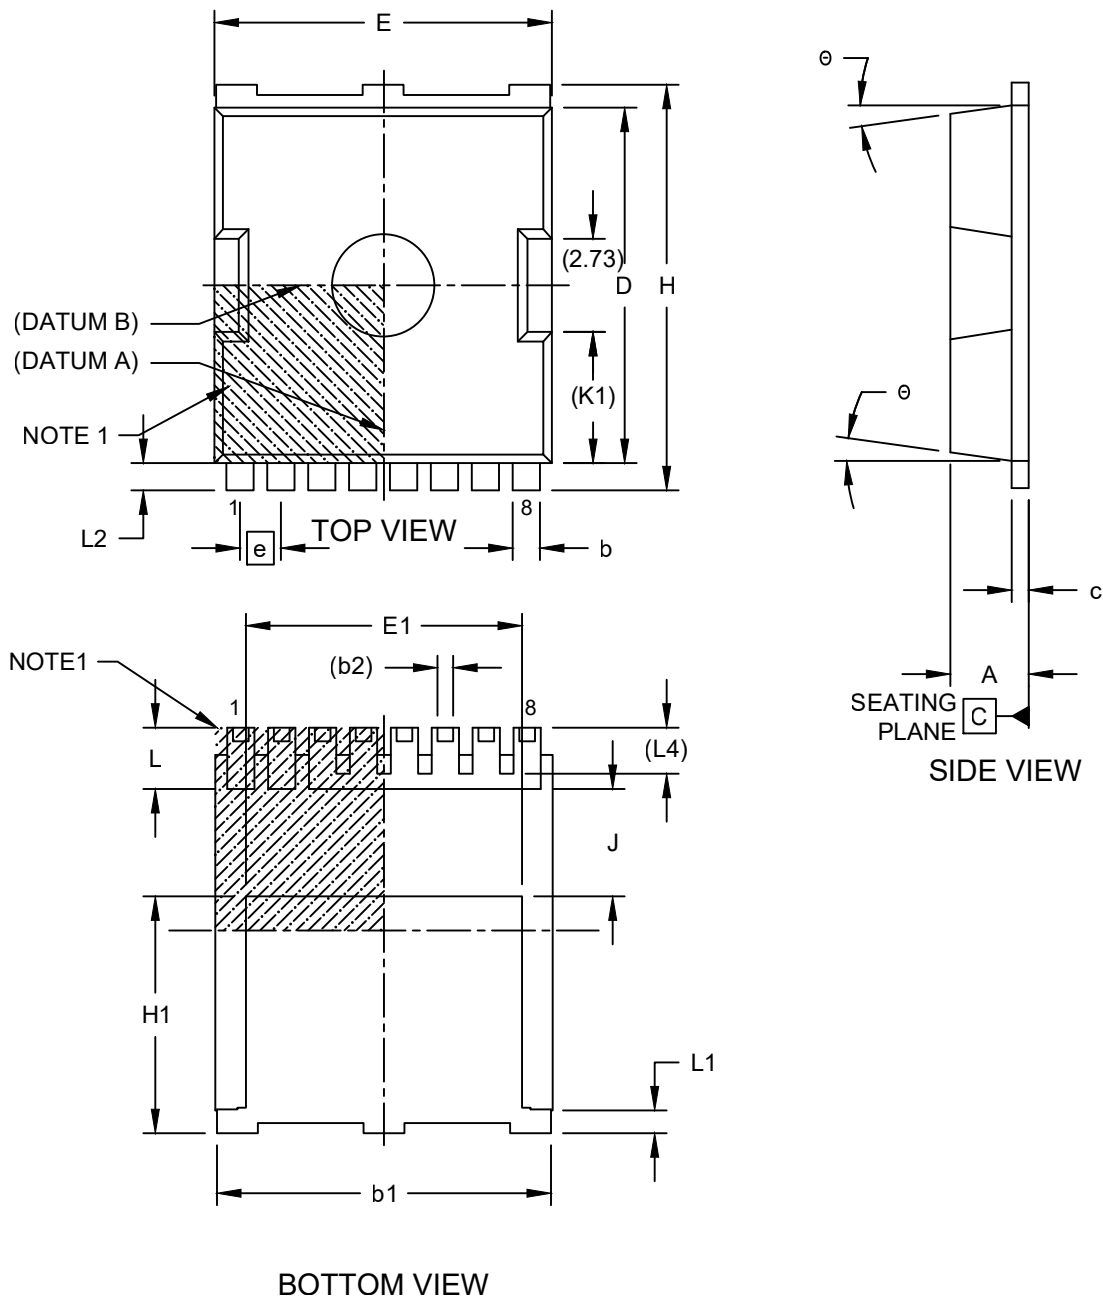

Packaging Diagrams and Parameters

8-Lead Transistor Outline Lead Less (8UW) - 9.90x11.68x2.40mm [TOLL] With Exposed 8.3x7.15mm Heat Sink

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

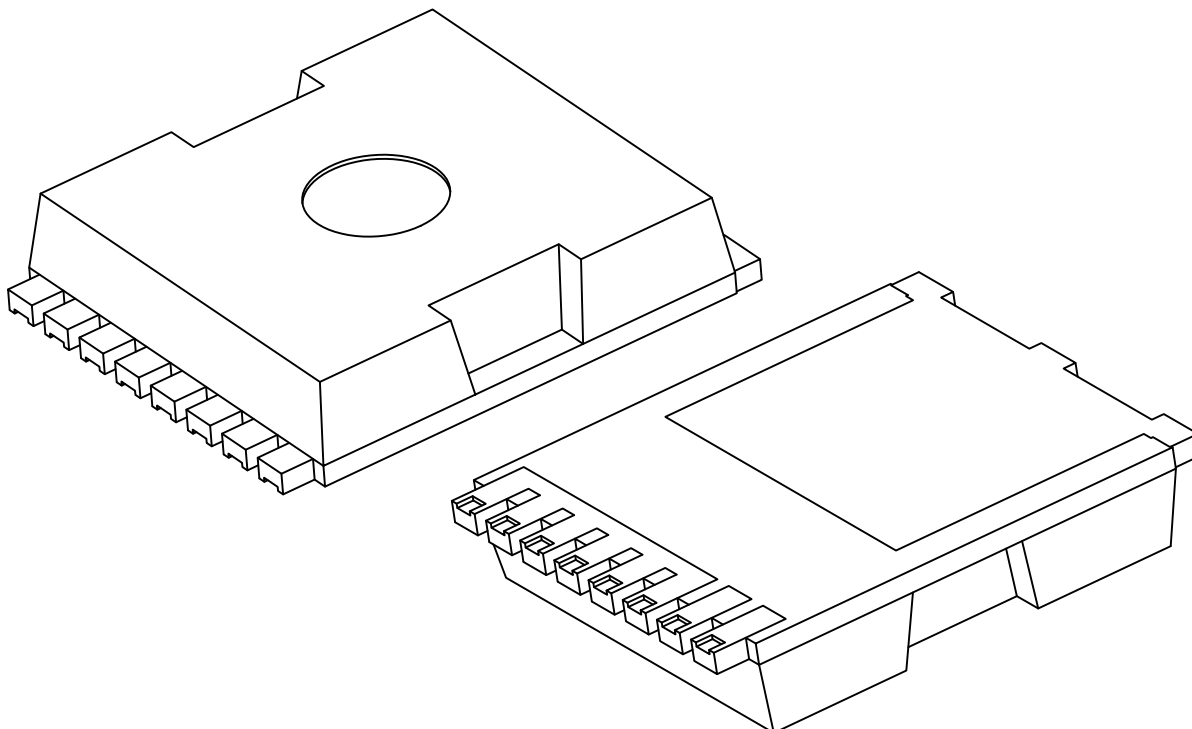

Units		MILLIMETERS		Units	MILLIMETERS	
Dimension Limits		MIN	MAX		MIN	MAX
Number of Terminals	N	8		K1	4.18 REF	
Pitch	e	1.20 BSC		b1	9.70	9.90
Overall Height	A	2.20	2.40	b2	0.46 REF	
Leadframe Thickness	c	0.40	0.60	L1	0.60	0.80
Overall Length	H	11.48	11.88	L2	0.50	0.70
Mold Length	D	10.28	10.58	L4	1.15 REF	
Exposed Heat Sink Length	H1	6.75	7.15	Θ	4°	10°
Overall Width	E	9.70	10.10			
Exposed Heat Sink Width	E1	7.90	8.30			
Terminal Width	b	0.70	0.90			
Terminal Length	L	1.40	1.80			
Terminal-to-Exposed-Pad	J	3.00	3.30			


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerances, for information purposes only.

Land Pattern

8-Lead Transistor Outline Lead Less (8UW) - 9.90x11.68x2.40mm [TOLL] With Exposed 8.3x7.15mm Heat Sink

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

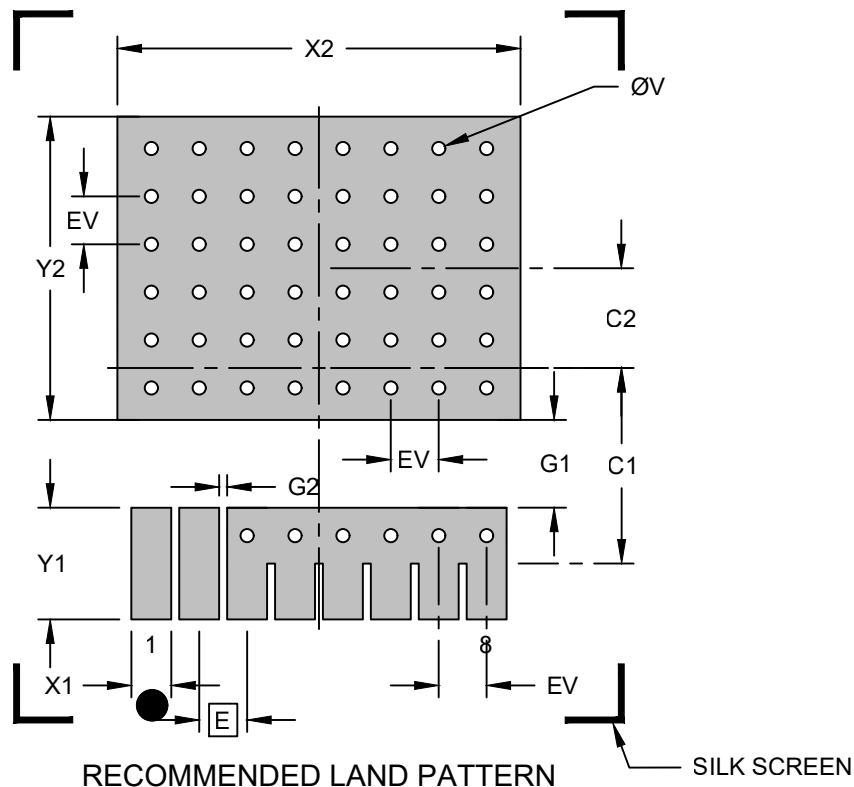

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	1.20 BSC		
Center Pad Width	X2			10.10
Center Pad Length	Y2			7.60
Contact Pad Spacing	C1		4.90	
Contact Pad Spacing	C2		2.50	
Contact Pad Width (Xnn)	X1			1.00
Contact Pad Length (Xnn)	Y1			2.80
Contact Pad to Center Pad (Xnn)	G1	2.20		
Contact Pad to Contact Pad (Xnn)	G2	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, please refer to current industry standard IPC-7093.